

FINGER PROTECTION DEVICES

FP800




DESCRIPTION

Suitable for most **single and double action doors** including automatic doors, utilising a roller system to provide effective finger protection; preventing fingers being accidentally trapped on the hinge side of a door.

Featuring **weather resistant** housing and fabric for external use, but can be used internally.



Closed

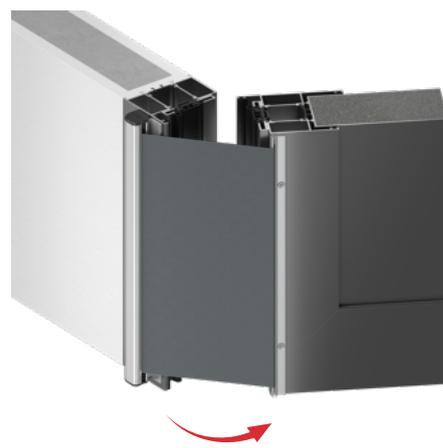

Open

TECHNICAL DATA

Information	FP800
Cycles of operations	200,000
Maximum length	2500mm
Standard length	1925mm
Minimum length	325mm
Maximum fabric travel	260mm

Additional Info

- Weather Proof: Resistant to: rain, snow frost, foliage, dirt and UV light
- Temperature range: -20 to +50 °C
- Robust housing with increased wall thickness for extra durability

HOUSING FINISH OPTIONS




Satin Anodised Aluminium (SAA)

FABRIC COLOUR




Anthracite Grey
(RAL 7016)

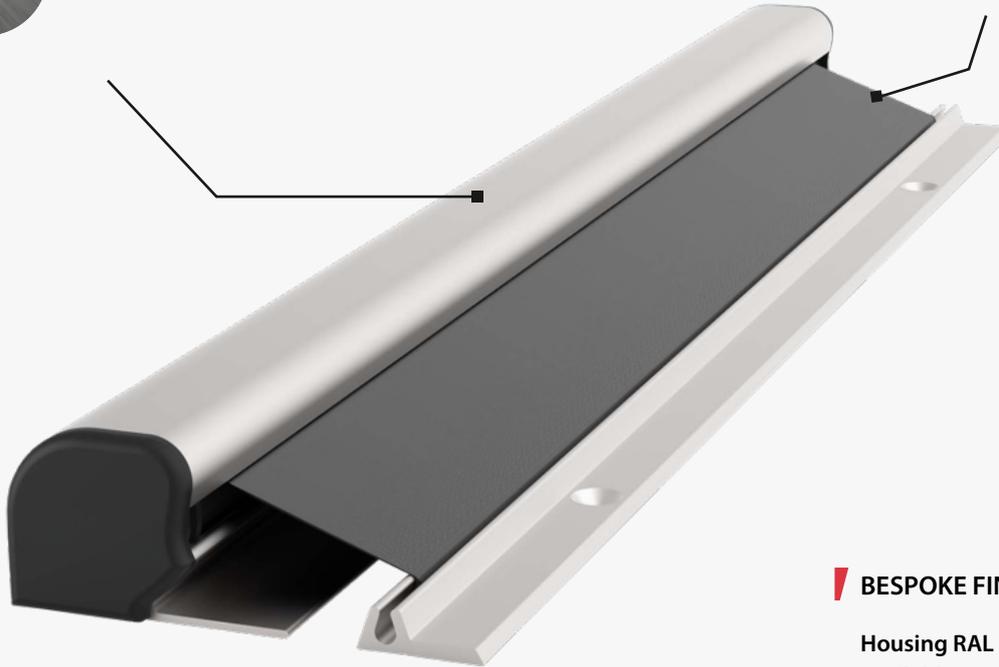

BESPOKE FINISHES

Housing RAL colour match available on request (POA). Please contact us to enquire.

DIMENSIONS

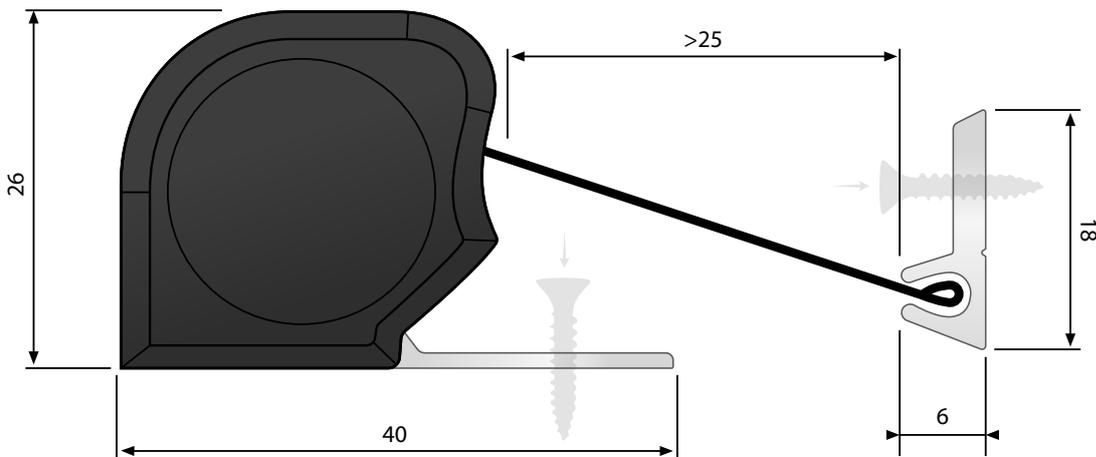

Awarded German Safety Mark and certified to EN16654

