

AXIAL FANS | SAPPHIRE RANGE

GTF 100MM (4") ENERGY EFFICIENT


KEY FEATURES

- ▶ Extract rates comply with current Building Regulation requirements
- ▶ Offers very low SFP down to 0.22 (W/l/s)
- ▶ Quiet in operation
- ▶ Provides effective ventilation
- ▶ Stylish fascia to fit interior design scheme
- ▶ Suitable for bathroom and toilet
- ▶ Ability to mix and match fascia options

Technical data

Description	230V	SELV (230/12V)
Max Extract Volume (l/s)	23	24
Max Extract Volume (m³/h)	83	86
Max Pressure (Pa)	30	27
Supply Frequency (Hz)	50	50
Specific Fan Power (W/l/s)	0.37	0.22
Max Power (W)	8.5	4/Standby 0.2
Max Sound dB(A) @ 3m	32	32
Weight (kg)	0.7	0.8 inc transformer
IP Rating	X4	X4
Max Operating Temperature (°C)	40	40
Wall-Fit Hole Diameter (mm)	110	110
Warranty	2 yrs	2 yrs

DIMENSIONS

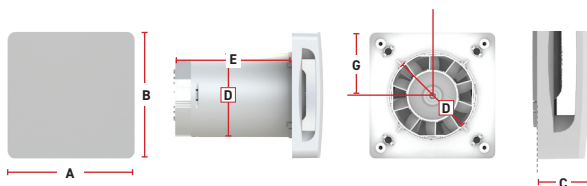


Measured in mm

A: 150 B: 150 C: 37 D: 99 E: 139 F: 75 G: 75


**YOUR
VENTILATION
SPECIALIST**

03443 715 523

www.domusventilation.co.uk

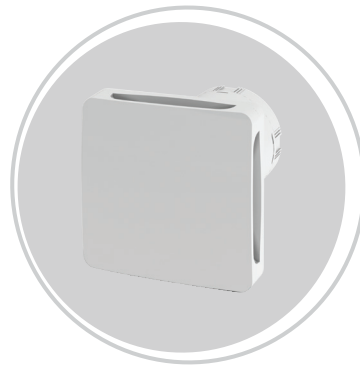

PERFORMANCE

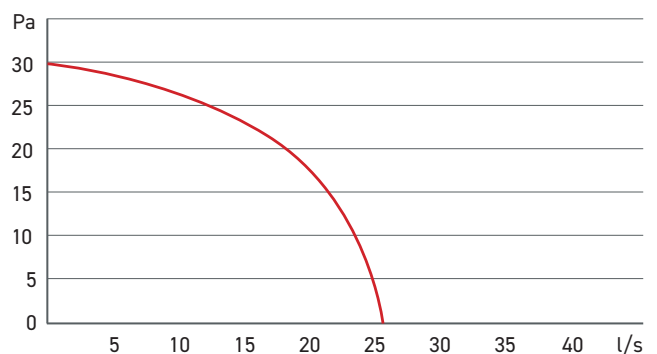

Models

Product Code	SELV	Back Draught	Retail Pack	Pull Cord	Timer	Humidistat
GTF100-S						
GTF100-SBS		•				
GTF100LV-SBS	•	•				
GTF100-SR			•			
GTF100-PCBS		•		•		
GTF100LV-PCBS	•	•		•		
GTF100-PCR			•	•		
GTF100-T					•	
GTF100LV-T	•				•	
GTF100-TBS		•			•	
GTF100LV-TBS	•	•			•	
GTF100-TR			•		•	
GTF100-H					•	•
GTF100LV-H	•				•	•
GTF100LV-HBS	•	•			•	•

Accessories

1K	Wall Fitting Kit
TFF100-CF1W	Fascia, Curved, Gloss White Finish, 202x202mm
TFF100-CF1S	Fascia, Curved, Silver Finish, 210x202mm
TFF100-CF1BM	Fascia, Curved, Brushed Metal Finish, 210x202mm
TFF100-DT1W	Fascia, Circular Indent, Gloss White Finish, 210x202mm
TFF100-DT1S	Fascia, Circular Indent, Silver Finish, 210x202mm