
Concrex[®] Permanent granite-hard floor repairs. Our best-selling floor repair mortar comes in several easy-to-use versions



Where to use Concrex®



Light Grey
Blue
Stone
Black
Tile Red
Green
Buff
Original

The colours shown here are intended to give an indication and should not be taken as an accurate guide

CONCRETE | REPAIRS

Watco Concrex®

Our original, best-selling floor repair mix: fast, permanent and strong.

Outstanding strength and reliability are guaranteed with minimal prep time from one of our most popular and trusted products.

Concrex[®] cures to a granite-hard finish that is impervious and non-dusting.

- Easy to apply Cures in 3 to 6 hours
- Coverage 1.2m² per 10kg at 5mm thick
- Virtually indestructible 8 times stronger than concrete
- Minimal prep time Saves labour costs; mix and apply in minutes
- Tack Coat Primer Essential for shallow applications and screeding
- 10kg £80.80
- 25kg £159.10

Watco Concrex® Rapid Set

Ideal for rapid repairs in all heavily trafficked industrial areas. Hardworking and as strong as Concrex[®], this cures in only 3 hours under normal conditions.

- Coverage 1.2m² per 10kg at 5mm thick • Take your time 30 to 60 minute
- working life, so there's no need to rush
- 10kg £95.80
- ▶ 25kg £183.50

Watco Concrex® Cold Set

Specialist formula for making longlasting repairs to colder areas. The perfect product for all-year-round repairs.

- Coverage 1.2m² per 10kg at 5mm thick
- Ultra strong The repair answer for places such as cold rooms, entrance ways and outside areas where temperatures drop to 0°C

▶ 10kg • £95.80

25kg • £183.50

Watco Concrex® Advanced

Our most technologically advanced concrete repair product yet. Years of research and expertise in our laboratories has gone into creating Concrex[®] Advanced.

Based on our best-selling Concrex[®], this Advanced formula offers a range of hightech benefits that will save you time and offer an even stronger, more hard-wearing finish.

- Coverage 1.2m² per 10kg at 5mm thick
- **Super-fast** Curing time from as little as 1 hour at 15°C to 20°C
- Extremely tough Ceramic additive offers exceptional abrasion resistance
- Excellent resistance Modified epoxy resin base gives superior resistance to chemicals
- Tack Coat Primer Essential for shallow applications and screeding
- 10kg £109.70
 25kg £213.20

Watco Concrex[®] Acid Strength

Repairs acid-damaged concrete,

permanently. The best resistance to chemicals that you can get with a curing time of just 5 to 6 hours at 20°C.

- Coverage 1.2m² per 10kg at 5mm thick
- Superior Resistance Withstands 95% sulphuric acid
- 10kg £95.80

Watco Concrex® Coloured

Saving you the time and hassle of painting after repair work. Our topselling product is easy to use and can cope with heavy traffic at only 5mm thickness.

Coloured epoxy resin mortar for a better blend with a coloured floor.

- Coverage 1.2m² per 10kg at 5mm thick
- Looks the part Available in 7 colours
- 10kg £94.40
- 25kg £191.40

Watco Concrex® Sub Zero

Perfect results under the toughest conditions when other repair mortars fail. The answer when you have to undertake thin section and feather edge repairs in brutally cold weather.

This cures down to an incredible -20°C, and it's also impermeable and non dusting.

- Coverage 1.2m² per 10kg at 5mm thick
- Does it all Chemical resistant and antislip too
- 10kg £95.80

Tools and Primers	Each
Tack Coat 1m ²	£21.40
Tack Coat 6m ²	£61.20
10" Steel Float	£6.60
4" Mix and Apply Trowel	£6.00
Large Concrex [®] Application Kit	£24.00
Small Concrex [®] Application Kit	£13.80
Concrex® Mixing Tub	£9.70

Buy more, save more		1-3 units	4-11 units	12+ packs
Concrex [®] Original	10kg	£80.80	£72.70	£68.60
Concrex [®] Original	25kg	£159.10	£143.20	£135.30
Concrex [®] Rapid Set	10kg	£95.80	£86.30	£81.40
Concrex® Rapid Set	25kg	£183.50	£165.20	£156.00
Concrex® Cold Set	10kg	£95.80	£86.30	£81.40
Concrex® Cold Set	25kg	£183.50	£165.20	£156.00
Concrex [®] Advanced	10kg	£109.70	£98.90	£93.20
Concrex [®] Advanced	25kg	£213.20	£192.30	£181.20
Concrex® Acid Strength	10kg	£95.80	£86.30	£81.40
Concrex [®] Coloured	10kg	£94.40	£89.70	£80.20
Concrex® Coloured	25kg	£191.40	£181.80	£162.60
Concrex [®] Sub Zero	10kg	£95.80	£86.30	

Concrex[®] **Deep Fill** Stronger repairs with less fuss



Watco Concrex® Deep Fill

Economical and ultra-strong repair formula for deep holes. Using advanced technology, Watco's Concrex® Deep Fill can be applied in one layer, reducing downtime and making it the ideal solution for getting rid of deep holes in heavy traffic areas.

A lower cost Concrex[®] option for difficult deep holes. Concrex[®] Deep Fill is a superstrong repair product that's suitable for internal and external use to fill holes in concrete, sand and cement, and even metal.

- Coverage Approx 0.5m² per 25kg at 30mm thick
- Choose your finish For a smoother finish and feather-edge, use with our other Watco Concrex[®] products, or simply leave it with a coarser surface
- Apply with ease Mix the 2 components and apply in a single 15 to 100mm layer.
 Priming is not usually needed, however Concrex[®] Deep Fill can be used with
 Watco Tack Coat, our adhesive primer designed to help bonding in difficult areas
- Less time waiting Cures in 5 to 6 hours at 15°C to 20°C
- 25kg £104.10

Watco Concrex[®] Deep Fill Cold Cure

Deals with deep holes when the temperature falls to freezing level. Delivers the same strength and features of our standard Concrex[®] Deep Fill, but specially formulated to handle essential repairs in cold conditions between 0°C and 10°C.

- Coverage Approx 0.5m² per 25kg at 30mm thick
- Likes the cold Cures in 6 to 8 hours at 10°C and in 24-48 hours at 0°C

25kg • £125.90

Watco Concrex® Deep Fill Rapid

When time's an issue this fills deep holes fast. Offers the same coverage, usage and depth as our standard Concrex[®] Deep Fill, but designed to get areas back in action even quicker.

- Coverage Approx 0.5m² per 25kg (30mm thickness)
- Need for speed Can be applied at temperatures above 10°C and is ready for light traffic in just 3 hours at 15°C to 20°C

25kg • £125.90

Watco Concrex® Coving Mortar

Create coved skirting for easier cleaning. Our Coving Mortar uses Concrex[®] technology for tough, chemical and impact resistant skirting.

- Coverage Each 5kg pack produces approx 5 metres of 50mm x 50mm coved skirting and can be applied with a coving trowel for depths between feather-edge and 50mm. Use 1m² Watco Tack Coat as a primer for every two packs of Concrex Coving Mortar
- Stays strong Even with feather-edges
- Applies with ease Suitable for concrete, sand and cement, and metal
- Fast finish Cures in 3 to 6 hours at 15°C to 20°C

▶ 5kg • £55.70





Watco Concrex[®] Flex

Solid and strong where there's

movement. Concrex® Flex is a specifically designed resin blend to cope with movement and vibration, making problem areas a thing of the past.

Featuring the same super tough properties of Concrex[®]. Concrex[®] Flex is ideal for repairs around expansion joints, it is suitable for interior and exterior use, and can be painted.

- Coverage Approx 1.2m² per 10kg at 5mm thick
- Repairs damage Ideal for use on damaged concrete around expansion joints, ramps, guide rails, drains, and manhole covers. Creates feather-edges without breaking
- Fast working Cures in 5 to 6 hours at 15°C to 20°C, and is ready for heavy traffic in 12 to 16 hours
- Fuss free Applies easily using a steel float or trowel. Watco Tack Coat recommended before use

10kg • £103.30

Watco Tack Coat

Epoxy resin adhesive primer for

stronger repairs. New formula, designed for use with Concrex[®] in shallow, fiddly, or vertical repairs, it can be applied to damp or dry surfaces at temperatures above 0°C.

- Works with most materials Suitable for use with concrete, render, stone, sand and cement, and metal - inside or out. Can be applied on top of existing paint once loose paint flakes are removed
- Iob done Can be overcoated with Concrex[®] within 30 to 60 minutes
- Watco Tack Coat Sub Zero Available for use with Concrex[®] Sub Zero at temperatures as low as -20°C
- 1m² £21.40
- 6m² £61.20
- Sub Zero 750ml £25.50

Watco Concrex® **Application Kits**

Large Application Kit includes:

4 plastic bags for transporting, 750ml white spirit, 10" steel float, 6" trowel, wire brush/scraper, 5 cloths and nitrile gloves.

Ideal for 25kg of Concrex®

Large • £24.00

Small Application Kit includes:

2 plastic bags for transporting, 250ml white spirit, mix and apply trowel, wire brush/scraper, cloth and disposable gloves.

Ideal for 10kg of Concrex®

Small • £13.80

Concrex® Mixing Tub


440mm x 650mm x 150mm deep



Buy more, save more		1-3 units	4-11 units	12+ packs
Concrex® Deep Fill	25kg	£104.10	£93.80	£88.50
Concrex® Deep Fill Cold Cure	25kg	£125.90	£113.40	£107.00
Concrex® Deep Fill Rapid	25kg	£125.90	£113.40	£107.00
Concrex [®] Rapid Set	25kg	£183.50	£165.20	£156.00
Concrex [®] Coving Mortar	5kg	£55.70	£52.90	
Concrex [®] Flex	10kg	£103.30	£98.10	

Tools	Each
4"Trowel	£6.00
Coving Trowel	£28.60
Concrex [®] Mixing Tub	£9.70

Flowpatch[®] Easy pour, rapid setting floor repairs for heavy traffic areas

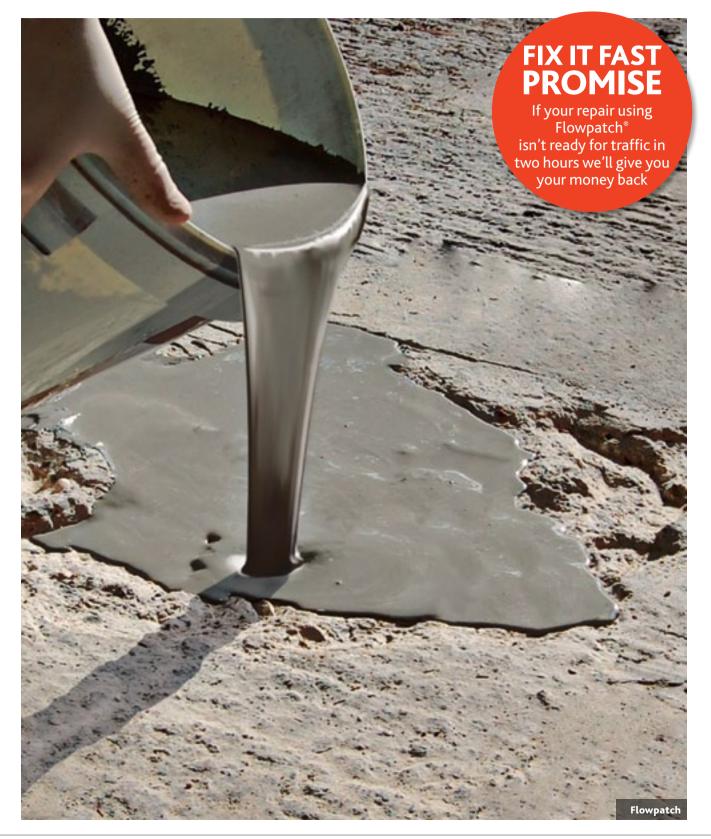

CONCRETE | REPAIRS





Watco	Flow	patch®
H utto		Paten

Simply add water, mix and pour to repair any area of damaged concrete. For rapid repairs to concrete, this will be ready for foot traffic after just 30 minutes and for forklift use within a couple of hours.

Flowpatch[®] will give a slip-resistant finish for real peace of mind and it can be applied quickly and easily to either dry or damp surfaces.

- Coverage 0.5m² per 25kg at 25mm thick
- Sets at low temperatures No need to wait for warm conditions. Cures at 10°C
- 25kg £112.00

Watco Flowpatch® Coloured

The perfect product for quick repairs to holes in coloured concrete. No need for overcoating and coverage is 0.5m per 25kg at 25mm thick.

- Coverage 0.5m² per 25kg at 25mm thick
- **Colour** Four great options available. See panel, below left

25kg • £129.80

Watco Flowpatch® Deep Fill

Just what you need for filling holes between 50mm and 200mm deep. The coarser aggregate in this effective

formula makes it a more economical way to deal with deeper holes and damaged concrete.

- Coverage is 0.25m² per 25kg at 50mm thick
- 25kg £91.00

Watco Flowpatch® Sub Zero

Special formula for use when

temperatures drop as low as -20°C. Because this product can be poured into holes from just 20mm to 100mm deep in one application, there's no need to build up the repair in layers.

- Coverage is 0.25m² at 20mm thick per 10kg – and 0.6m² at 20mm thick per 25 kg
- Fast curing Ready for light traffic after 1 hour
- Versatile Can be used inside and out
- 10kg £66.30
- 25kg £165.20

Flowpatch® Coloured	Blue
Flowpatch® Coloured	Green
Flowpatch* Coloured	Stone
Flowpatch® Coloured	Tile Red
Flowpatch® (all others)	Original

The colours shown here are intended to give an indication and should not be taken as an accurate guide

1-3 units

£112.00

£129.80

£91.00

£66.30

£165.20

25kg

25kg

25kg

10kg

25kg

4-17 units

£106.40

£123.30

£86.40

£62.90

£157.00

18+ packs

£78.40

£90.90

£63.60

£46.40

£115.70

Buy more, save more...

Flowpatch[®] Coloured

Flowpatch® Deep Fill

Flowpatch® Sub Zero

Flowpatch® Sub Zero

Flowpatch®





Tools	Each
10" Steel Float	£6.60
Mixing blade	£10.80

Get concrete looking like new again



Watco Concrex® Fine Filler

Before painting, repair minor imperfections in your floors with this extremely strong filler. Strong enough for fine crack repairs in areas that are subject to heavy traffic.

This is an extremely strong two pack epoxy resin paste that is ideal for horizontal and vertical surfaces, inside and out. It is an economical solution for scratches or small holes, will not shrink as it cures, and boasts good chemical resistance.

- Quick repairs Not only is it easy to mix (50:50 ratio by weight or volume) but it is also economical. Just mix only as much as you need at one time, and the repair will cure in just one hour at 15°C-20°C
- Versatile Ideal for repairing scratches, blemishes, small gaps, cracks and holes in concrete and masonry
- **Strong** The adhesive strength of Concrex Fine Filler is greater than the strength of concrete itself, so you can rely on it even in heavy traffic areas.
- Ideal preparation Once applied you can leave your repaired area as is, or paint over with a Watco coating

1.5kg • £41.90



Watco Flexible Crack Sealant Tremco SP540

Easy to apply, flexible sealant designed for floors and walls. Watco Flexible Crack Sealant fills and seals joints or cracks between 3 and 25mm wide to form a hardwearing, chemical resistant repair that moves with your material (=/-25%).

This economical sealant is enough to fill approx. 9 metres of 6mm wide and 6mm deep crack with a single cartridge.

- **Trouble Free** Easily applied with a standard **Skeleton Gun**. Adheres to metal, enamel, wood, GRP and plastics, without the need for primer. Can be painted over after 24 hours
- **Stands tough** Suitable for horizontal and vertical repairs on most surfaces, with slump resistance
- Rapid results Tack-free in less than 4 hours at 15°C to 20°C
- ▶ 310ml £18.60





Watco Floor Joint Sealant

A flexible seal for cracks in concrete flooring and expansion joints. Based on the latest polyurethane technology, our pourable, two-part Floor Joint Sealant protects floor joints and slab edges.

Use masking tape along the edge for a flawless finish.

- **Coverage** approx **20 metres** of a joint 10mm wide x 10mm deep per 2 litre pack
- **Battles bad weather** Fills and seals both interior and exterior moving and non-moving concrete floor joints
- Seals in a flash Cures in 8 to 12 hours at 15°C to 20°C. Requires our 250ml Floor Joint Sealant Primer before use. For deep floor joints we recommend using Watco Back Up Rods
- **Super resistance** Excellent compression and recovery makes this perfect for heavy traffic areas. Resists chemical spills
- ▶2L £61.00
- 250ml Primer £11.50

Tools	Each
10m Back Up Rod 15 mm diameter	£6.70
10m Back Up Rod 20 mm diameter	£8.80
10m Back Up Rod 25 mm diameter	£12.30

CONCRETE | REPAIRS



Watco Flexible Joint Repair

A heavy duty flexible repair for expansion joints. This tough, flexible filler means what is usually a two stage job is now just one simple process.

Most traditional flexible filler applications require two steps - reforming joint edges with mortar, and then filling the joint with expansion materials. Watco Flexible Joint Repair eliminates the need to reform joint edges, making the process one simple step rather than two.

- Quick and easy Repair broken expansion joints - ready for use in 8-12 hours
- Flexible polyurethane mortar Fills the joint and the broken concrete joint edges in one simple process
- Ultra strong Suitable for heavy traffic including forklift
- ▶ 2.5L £65.00



Watco Fine Crack Filler

Our tough solution for fine cracks.

A no-shrink two-part epoxy liquid that doesn't require sanding down and is ideal for interior and exterior cracks 2 to 3mm wide.

- Done in a flash Cures in only 4 hours at 15°C to 20°C
- Goes the distance 500ml will fill over 25 metres of a crack 2mm wide by 5mm deep
- Choose your surface Suitable for concrete, and sand and cement and it can be coated with any type of floor paint
- Cold cure version For applications in temperatures as low as 0°C

500ml • £27.60

▶ 500ml Cold Cure • £30.10



Watco Vertical Crack Filler

Gravity-proof adhesive filler for high strength repairs. Vertical Crack Filler is an extra-strong repair formula for all exterior and interior stonework.

Virtually solvent free and easy to apply, the filler doesn't slump during application and can be used on cracks up to 10mm wide.

- Super speed Cures in only 3 to 4 hours at 15°C to 20°C
- Everything you need Also works as a general purpose adhesive. Comes as a kit with the epoxy resin and curing agent (total volume 310ml), an empty cartridge that fits a standard skeleton gun, and plunger and nozzle
- Handles most materials Ideal for concrete, mortar, brick, stone, glass, steel, other metals and many types of timber

▶ 310ml • £24.00



Tools	Each
10" Steel Float	£6.60
Skeleton Gun	£4.80

Strong repairs to damage in tricky areas



Concrex[®] Vertical

Watco Concrex[®] Vertical

An easy way to repair vertical surfaces. Specially designed by Watco to fix damaged concrete, our super-tough formula contains lightweight fillers capable of handling even overhead repairs.

Ideal for frost-affected concrete with exposed reinforcement, Watco Concrex Vertical stands up tough against the elements. Concrex Vertical is a two-part epoxy resin mortar that's suitable for concrete, stone and metal.

For cold weather we have Concrex Vertical Cold Set which can be applied at any depth, from feather-edge to 50mm, at temperatures down to zero degrees.

- Coverage Approx 2.4m² at 5mm, per 10kg pack
- Gravity defying Shatterproof against impact and won't slump during application. Perfect for repairs to pillars, sills, beams, render and stonework
- Fast track Cures in only 5 to 6 hours at 15 to 20°C, and 10 hours at 10°C. Will hold lightweight fixing while wet and can be drilled once cured
- Minimal prep Requires Watco Tack Coat before use. If rusty, use Watco Primebase prior to Tack Coat

10kg • £85.80

Watco Concrex® Vertical Cold Cure

Make repairs to vertical surfaces in temperatures as low as 0°C. Extreme strength vertical and overhead repairs are possible even in cold temperatures with Concrex Vertical Cold Cure.

Formulated for fixing up damaged masonry on vertical surfaces externally or in internal cold rooms.

- Coverage Approx 2.4m² at 5mm, per 10kg pack
- Ideal in low temperatures Cures as low as 0°C so is ideal for interior cold rooms, or exterior areas in winter months. Use on concrete, sand, cement, and metal
- Gravity defying Will not slump during application, or shatter under impact damage
- Fast finish Cures in 24 hours at 0°C to a durable, impervious, chemical resistant finish
- Minimal prep Requires Watco Tack Coat before use. If rusty, use Watco Primebase prior to Tack Coat

10kg • £95.80



Watco Step Repair Kit

All the essentials needed to repair your concrete steps. This kit contains everything you need to permanently repair concrete steps, inside and out.

- Kit contains:
 - 10kg Watco Concrex
 - 1m² Watco Tack Coat
 - 250ml Low Odour White Spirit
- Wire Brush/ Scraper
- Disposable Paint Brush
- Cloths & Rubber Gloves
- Mix and Apply Trowel
- Coverage Approx. 1.2m² at 5mm thick per pack
- Tack Coat primer Essential for shallow applications and screeding

£95.70

QUICK We hold huge stoc we won't keep you waiting! We offer a 2-3 day standard delivery or next day delivery is available for orders placed by 2pm.



Watco Putty Patch

Long-lasting, durable repairs now only take 10 minutes with our mouldable repair mortar. Simply shape the easy to mix material with your hands to fit almost any profile that needs repairing.

For quick repairs to concrete, inside and out, our solution is Putty Patch. The puttylike consistency can easily be formed and shaped by hand or trowel, and will set in just 10 minutes

- **Coverage** As a guide, each 10kg unit will cover approximately **1m²** when applied 5mm thick
- Incredibly easy to use Simply add water, mix, and apply. Shape it to fit your difficult repairs, such as curved step nosing's, kerbs, moulded stonework or concrete, and other damaged vertical or horizontal surfaces

- **Super Speed** Initial set time is just 10 minutes, and will set hard in 60 minutes. Over the next few days the surface strength will continue to improve
- Works at low temperatures Ideal for rapid repairs, even in colder temperatures as it will set as low as 5°C
- Versatile Apply at any depth from 5-100mm, and smooth off or feather edge as necessary

▶ 10kg • £47.50





£21.40
£61.20
£6.60

REPAIRS | CONCRETE RESURFACING

Flowtop[®] Make damaged and dangerous concrete safe. Tough enough to withstand forklift trucks



Flowtop[®] – How to apply











Flowtop[®] is extremely simple and effortless to use.

- 1 Apply the primers that are included in the pack
- 2 Mix the product using the mixing blade in an electric drill



- **3** Pour out the mixed product
- **4** Spread the mixed product with a trowel
- 5 Remove any air with a spiked roller
 6 As a guide, a 25kg pack of Flowtop[®] will cover approx 3.7m² at 3mm thick

Flowtop® Coloured	Blue
Flowtop® Coloured	Green
Flowtop® Coloured	Stone
Flowtop® Coloured	Tile Red
Flowtop [®] (all others)	Original
The colours shown here are in indication and should not be	

Watco Flowtop®

Tackle large areas of uneven and damaged floor quickly and easily. Smooth, non-dusting surfaces are easy to achieve and you can successfully apply a top coat of paint as well.

Coverage Approx 3.7m² at 3mm thick;
 2.25m² at 5mm thick; and 1.1m² at 10mm thick

- Good for garages Provides a smooth easy to clean surface
- Forklift friendly Excellent resistance to forklift trucks and stands up to general industrial wear and tear
- Colour options Available in a choice of colours
- Curing time Foot Traffic after 6 hours, forklifts after 24 hours at 15°C-20°C

25kg • £75.40

Watco Flowtop® Advanced

Our toughest resurfacer restores rough or damaged concrete to its original condition – or better! The research and expertise of our team of chemists has resulted in an even better version of our popular Flowtop[®] product.

An Advanced resurfacer which also gives superior resistance to chemicals and abrasion.

- Coverage Approx 3.7m² at 3mm thick;
 2.25m² at 5mm thick; and 1.1m² at 10mm thick
- time saver Easy to apply; saves time, effort and costs
- **Unrivalled** abrasion resistance Stands up to the heaviest industrial use
- Strength in depth Our epoxy resin redefines the meaning of strong
- Back in a day Foot traffic can resume after only 6 hours
- Curing time Foot Traffic after 6 hours, forklifts after
 24 hours at 15°C-20°C
- 25kg £96.90

Watco Flowtop® Coloured

Resurface damaged, uneven concrete and keep your floors looking great. This self-levelling compound makes it easier than ever.

You can pour a new floor directly from the container with Flowtop[®] Coloured, which saves you time, effort, and mess. It will self level to a smooth, easy to clean surface, in a choice of 4 colours.

- **Coverage** Approx **3.7m²** at 3mm thick; **2.25m²** at 5mm thick; and **1.1m²** at 10mm thick
- Reinforced with fibre A stronger, more durable surface that will withstand forklift truck traffic at only 3mm thick
- **Easy to use** Just 4 steps to a smooth, tough floor thanks to the pourable and self levelling formulation
- **Reliable** Slip resistant, non-dusting finish, which can be over coated or left as a tough wearing surface
- Colour options Choose from Blue, Green, Buff, or Tile Red
- Curing time Foot Traffic after 6 hours, forklifts after 24 hours at 15°C-20°C

▶ 25kg • £91.40



Buy more, save more		1-3 units	4-17 units	18+ packs
Flowtop [®] Grey	25kg	£75.40	£71.60	£56.50
Flowtop® Advanced Grey	25kg	£96.90	£91.80	£72.70
Flowtop [®] Coloured	25kg	£91.40	£86.80	£68.50



Tools	Each
Mixing Blade	£10.80
7" Spiked Roller	£17.30
Telescopic Handle	£10.20
Spiked Shoes	£26.70
Steel Float	£6.60

Bitu-Mend[®] Easy, instant pot hole repairs



Bitu-Mend[®] – How to apply



Watco Bitu-Mend®

Fast, durable, trusted pothole repairs. Our standard Bitu-Mend is ideal for repairing exterior potholes in asphalt and concrete.

Containing a unique aggregate mix for added strength, Bitu-Mend is easily compacted with just a tamper and repairs depths for 25mm to 75mm. A choice of black or red.

- Coverage Approx 0.5m² for 25kg at 25mm
- All in one No mixing required, Bitu-Mend pours straight from the pack. Pack also includes primer
- **Straight to work** Can be driven on by cars or HGVs straight after application

> 25kg Black • £50.90

> 25kg Red • £64.60



Tamper

A 4.5kg square tamper with a 1370mm steel shaft that ensures the optimum application of Bitu-Mend[®]

Watco Bitu-Mend® Advanced

Heavy-wear epoxy resin delivers permanent repairs. Our advanced formula is specially designed to deliver stronger, longer-lasting repairs for holes in concrete and asphalt surfaces.

Bitu-Mend Advanced's unique technology guarantees a thinner, more durable repair than traditional bitumen-based products, to meet the needs of heavy traffic areas.

Bitu-Mend Advanced is an epoxy resin formulation, ideal for repairs of interior and exterior holes at depths from 10mm to 100mm. Available in black.

- Coverage Approx 1m² per 25kg at 15mm
- Heavy duty healing Super strong for areas where forklifts and lorries operate
- Goodbye hazards Resurfaces trip hazards such as potholes and worn patches in asphalt and tarmac. Also suitable for bedding in and fixing guide rails etc
- No pricey tools Apply using just a trowel. Cures in just 12 hours at 15°C to 20°C

25kg • £98.70

Bitu-Mend® Advanced Deep Fill	Black
Bitu-Mend®	Red

The colours shown here are intended to give an indication and should not be taken as an accurate guide



Watco Bitu-Mend® Deep Fill

One application epoxy repair for deep holes. Bitu-Mend Deep Fill is ideal for fixing holes between 15 and 200mm deep.

Suitable for heavy traffic areas, it provides strength throughout the repair and cures to a black, slip-free finish.

- Coverage Approx 0.5m² at 30mm
- Easy does it No primer required. Can be walked on after 8 to 12 hours and is ready for heavy traffic after 12 to 24 hours (at 10°C to 20°C). Apply using a trowel, or a tamper for multiple repairs
- Inside and out Suitable for interior and exterior asphalt and concrete surfaces

25kg • £71.60

Watco Bitu-Mend[®] Pour & Restore

New pourable resin for asphalt and tarmac. Bitu-Mend Pour & Restore repairs shallow damage between 6 and 20mm deep, while delivering a slip resistant surface tough enough even for cars and lorries.

With the combined strength of epoxy resin and our easy to mix granite aggregate, Pour & Restore guarantees a durable finish that blends with the surrounding area.

Pourable consistency means the product self-smoothes with only a little help from a trowel to restore pitted, dished or worn surfaces.

- Coverage Approx 1.5m² at 6mm or 1m² at 10mm deep
- Easy fix With a simple mix and apply method, it's the easy alternative to digging out damaged asphalt. Ideal for car parks, yards, and pavements
- Fast drying Touch dry in 1 hour and ready for traffic in 16 hours at 20°C to 25°C


15kg • £62.00

Tools	Each
Tamper	£31.70
6"Trowel	£3.00
Hand Shovel	£3.90

Buy more, save more		1-9 units	10-32 units	33+ packs
Bitu-Mend [®] Black	25kg	£50.90	£43.40	£35.60
Bitu-Mend [®] Red	25kg	£64.60	£55.00	
Bitu-Mend® Advanced	25kg	£98.70	£88.70	£69.20
Bitu-Mend® Deep Fill	25kg	£71.60	£64.60	£50.10
Bitu-Mend [®] Pour & Restore	15kg	£62.00	£58.90	

REPAIRS | ASPHALT AND CONCRETE

Repair and protect asphalt and concrete



Watco Asphalt Crack Filler

Repair and protect against water and erosion. Cracks in asphalt spoil its appearance and can soon lead to water ingress, erosion and faster deterioration of the surface.

This rubberised bitumen filler is the answer. Crack repairs are now easy to sort. Cures in 2 to 4 hours at 15°C to 20°C or may take up to 10 hours for wider cracks.

- Coverage 5 litres fills 100m of 5mm wide x 5mm deep cracks
- Fully flexible Expansion and movement no longer a problem
- Keeps water out Tough and longlasting with excellent adhesion and prevents water ingress
- Go large Can be mixed with Sand Additive for larger repairs to cracks between 3 and 25mm



Watco Concrex® Asphalt Repair

For repairs to the hardest-working surfaces. When it comes to areas where traffic such as forklifts and heavy, narrow wheeled trolleys are used, most asphalt repair products remain slightly soft and can't cope. This one is different.

The ideal answer for repairing thin asphalt screeds and toppings, Concrex Asphalt Repair is perfect for car parks, loading bays and other heavily-used areas.

- Coverage Approx 1m² per 25kg at 15mm thick
- Extremely hard-wearing Strong enough to hold posts and guard rails
- Goes thin Coarse texture blends right in and can be applied thinly when required

25kg • £98.70



Watco Asphalt Easy Fill

Quick, fast crack repairs that last. Flexible rubber-based sealant seals

cracks and joints in no time. Can be used on asphalt, concrete, metal, stone and brick and dries in just 24 hours.

- Damage protection Prevents erosion and damage by keeping out water
- Fine Finish Ideal for finishing off edges covered by Bitu-Mend

310ml • £10.20

Our Guarantee

All Watco concrete and asphalt resurfacing products are not only quick and easy to use – we are so confident of results, we guarantee your money back if you are not satisfied



Tools	Each
2L Spouted Jug	£5.60
5kg Sand Additive	£10.60
Skeleton Gun	£4.80
Foam Squeegee	£10.50
Telescopic Handle	£10.20

ASPHALT AND CONCRETE | REPAIRS



Watco Road Patch Rapid

Patch repairs to asphalt and concrete are quicker than ever. Just 2 hours after repairing your road you can be back in action.

Road Patch Rapid is ideal for repairs in heavy traffic areas that need to be brought back into use quickly. In 2 hours your surface will be able to withstand light traffic. Use for repairs all year round, at temperatures as low as -20°C.

- **Easy to apply** Ideal for repairing holes in heavy traffic areas that need to be back in use quickly
- **Incredibly strong** The non shrinking material repairs old asphalt and concrete to a granite like finish
- Fast curing In 1 hour the surface will be showerproof, after 2 hours it will withstand light traffic, and in just 6-8 hours the repair will be fully cured and ready for car traffic, in temperatures of 15°C
- Withstands the cold The magnesium phosphate based formula generates heat when it is mixed with water, so you can use it at temperatures as low as -20°C
- **Coverage** 25kg produces approximately 4.6 litres of mortar, this covers **0.25m**² when applied at 20mm thick





Watco Asphalt Resurfacer

Seal, resurface and transform tired and worn asphalt. Damaged surfaces look as good as new with this easy-to-apply resurfacer that needs no primer and offers excellent UV and weathering protection.

- Coverage Approx 8m² per 25kg at 2mm thick and 15m² at 1mm thick
- Quick drying Ready for light traffic in 24 hours
- Safe surface Gives a matt, non-slip finish
- Easy to use Safe and low odour, easy application with a 5" brush

25kg • £128.80





Watco Concrete Resurfacer

Bring new life to tired and drab

concrete. The easiest way to brighten up old exterior concrete, this is easy to apply with a 5" brush. Smooths quickly, or go over it with a patterned roller to add a textured finish.

Comes in a choice of three colours.

- Coverage Approx 8m² per 25kg at 2mm thick and 15m² at 1mm thick
- Easy to apply No primer required and one coat is enough
- Strong in sun Excellent resistance to UV
- Feet and wheels Tough enough both for cars and pedestrian traffic

▶25kg • £128.80

