

News 2026/27
Sanitary

HEWI

Design
Comfort
Care



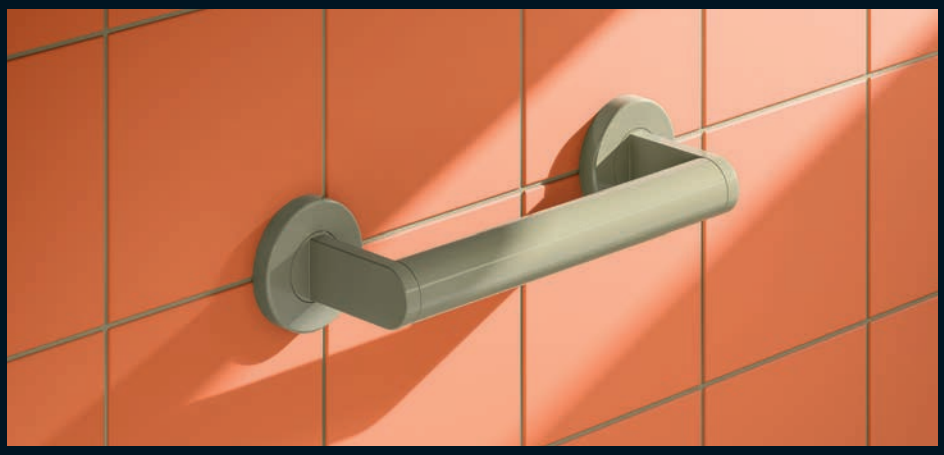

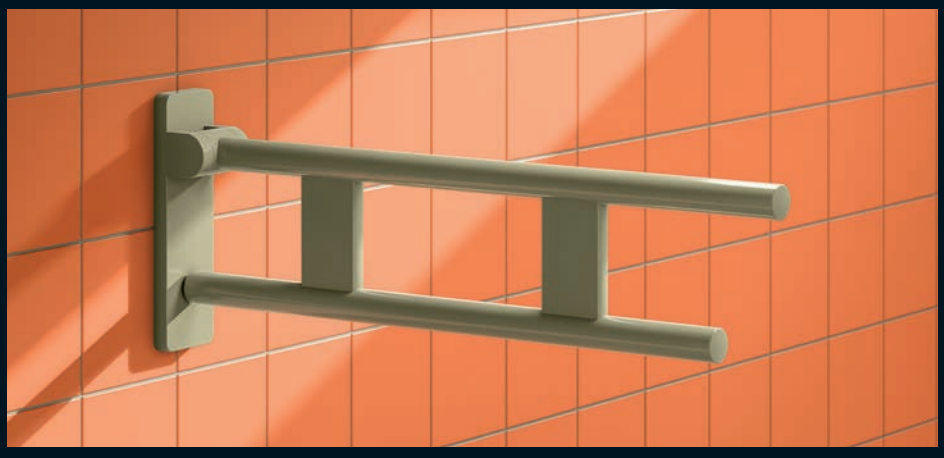









S 700 2

Product range 2 – 3
Accessories
Washbasin area 4 – 6
Toilet area 7 – 10
Shower and bath area 11 – 15
Accessibility
Support 16 – 25
Grip 26 – 33
Sit 34 – 48
Fixing types 49 – 50

S 900 Dispenser products for flush-mounting | Wall nices 51

Soap and paper towel dispensers 52 – 53
Waste paper bins 54 – 55
Wall nices 56 – 57

Range 805 | Range 805 Classic powder-coated 59

Accessories | dispenser products 60 – 67
Hinged support rails 68 – 71
Backrest rails 72 – 73
Upgrade kit toilet roll holder 74

Fittings 75

AQ 111 76
AQ 477 77 – 78
Single lever shower mixer tap for fall prevention 79

Washbasins 81

Washbasin ceramics 82 – 83
Hand washbasin mineral composite 84 – 85
Washbasin mineral composite 86 – 87

New single products 88

Accessories Range 480, S 900 89 – 91
Mobile solutions S 900 92 – 95
Hinged support rails with flush release/ function button Range 805 Classic 96 – 97

General information 98

International terms of sale 98 – 99

HEWI Hotline

Monday – Thursday 07:30 am – 17:00 pm
Friday 07:30 am – 14:00 pm
Phone: +49 5691 82-0
Fax: +49 5691 82-319
eMail: international@hewi.com

6 HEWI NEUTRAL COLOURS
- 98 (signal white)
- 99 (pure white)
- 97 (light grey)
- 95 (stone grey)
- 92 (anthracite grey)
- 90 (jet black)

ACCESSORIES



Tumbler with holder
700.04.00000 page 5



Soap or disinfectant dispenser with holder
700.06.00000 page 5



Utility dish
700.03.00200 page 5




Hook | Double hook
700.90.00... page 6



Hook strip
700.90.00200 page 6



Toilet roll holder
700.21.00000 page 7



Toilet roll holder with shelf
700.21.00100 page 7



Mobile shower head holder
700.33.00000 page 11



Toilet brush unit
700.20.00000 | ...100 | ...200 page 8



Toilet brush unit
700.20.00300 | ...400 | ...500 page 9



Toilet brush
700.20.00600 | ...700 page 10




Shower basket
700.03.00000 page 11



Shower basket
700.03.00100 page 11



Shower curtain rail
700.34.10... page 12

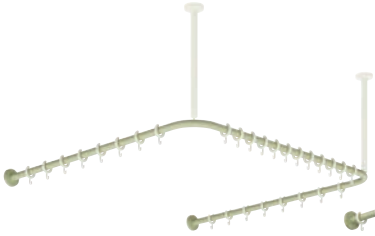


Shower curtain rail
700.34.30... page 13



Shower curtain rail
700.34.40... page 14


ACCESSIBILITY



Hinged support rail
700.50.10... from page 17
700.50.15... | mobile page 21



Hinged support rail
700.50.00... from page 19
700.50.05... | mobile page 22



Backrest rail
700.51.90000 page 24




Backrest rail
700.51.90..00 from page 24




Support rail | L-shaped support rail
700.36.0.. page 26
700.22.0... page 28



Rail and L-shaped support rail with shower head holder
700.33.0... page 29



Rail with adjustable vertical support bar and shower head holder
700.35.3... page 32



Rail with adjustable vertical support bar and shower head holder
700.35.0... page 33



Hinged seat
700.51.20..60 from page 34
700.51.40..60 | mobile page 38



Hinged seat with hygiene cutout
700.51.20..60 from page 35
700.51.40..60 | mobile page 39



Removable hanging seat
700.51.1... from page 40



Removable hanging seat with armrests
700.51.1... from page 41

MATCHING PRODUCTS

System 700 can be supplemented with the following products (see the online catalogue)



Fittings



Washbasins



Mirrors




Universal products

S 700
Accessories



	Item Number	Dimensions in mm / Specification






700.04.00000

HEWI Tumbler with holder
· cylindrical tumbler with fl at bottom
· ring shaped wall holder
· for wall mounting, concealed fixing
· 79 mm wide, 110 mm high and 92 mm deep
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive HEWI fixing material




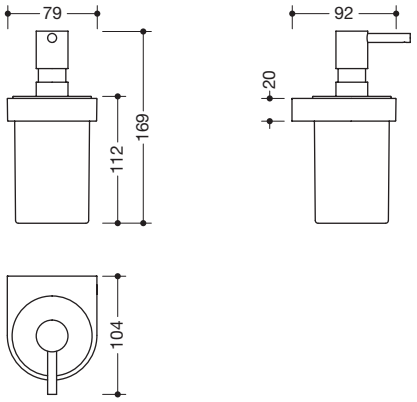

700.06.00000

HEWI Soap or disinfectant dispenser with holder
· cylindrical soap dispenser with ring shaped wall holder
· pump made of metal, chrome-plated
· capacity ca. 200 ml
· to be filled with standard liquid soap, disinfectants and gels
· 79 mm wide, 169 mm high and 92 mm deep
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive HEWI fixing material



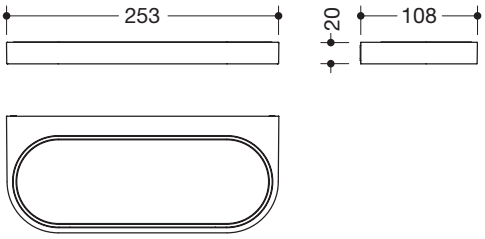

700.03.00200

HEWI Utility dish
· rotatable soap dish, can sit flush against the holder or be used as a small storage dish
· for wall mounting, concealed fixing
· 253 mm wide, 20 mm high and 108 mm deep
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive HEWI fixing material

8 HEWI colours


98 99 97 95 92 90 43* 77*

800.04.010	**HEWI Tumbler**
800.06.E02	**HEWI Container for soap dispenser**
100.03.E02	**HEWI Pump head**
60169	**HEWI Insert utility dish**

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number	Dimensions in mm / Specification






700.90.00000

HEWI Hook
· cylindrical hook
· 43 mm deep, ø 18 mm
· for wall mounting, concealed fixing
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· supplied without fixing material




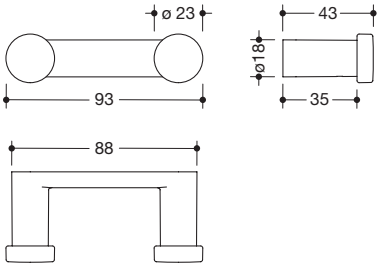

700.90.00100

HEWI Double hook
· double hook with two cylindrical hook parts
· 43 mm deep, 88 mm wide, hook parts ø 18 mm
· for wall mounting, concealed fixing
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· supplied without fixing material



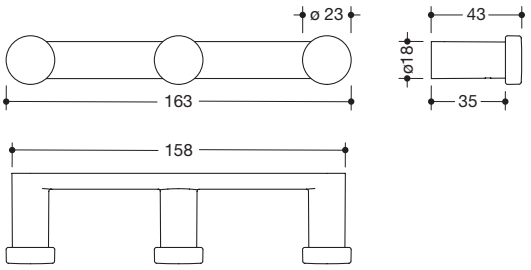


700.90.00200

HEWI Hook strip
· Hook strip with three cylindrical hook parts
· 43 mm deep, 158 mm wide, hook parts ø 18 mm
· for wall mounting, concealed fixing
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· supplied without fixing material

Item Number

Dimensions in mm / Specification




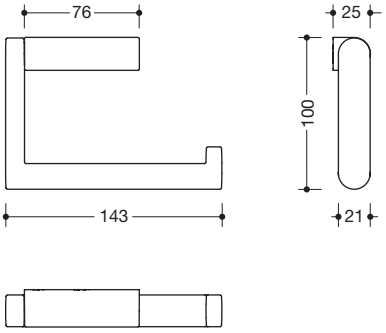

700.21.00000

HEWI Toilet roll holder
· can be mounted on the right and left side, hinged bracket
· 143 mm wide, 100 mm high, 25 mm deep
· drilling pattern is identical to that of range 477 toilet roll holder
· for wall mounting, concealed screw fitting
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· for wall mounting, concealed fixing
· including non-corrosive HEWI fixing material




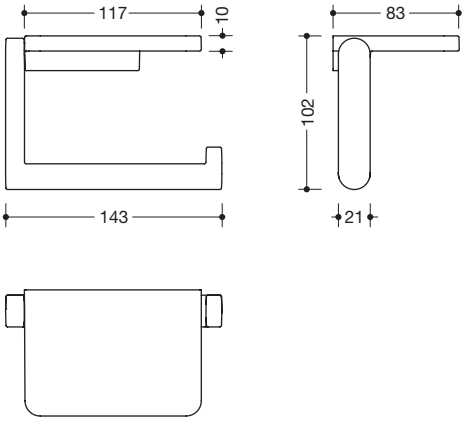

700.21.00100

HEWI Toilet roll holder with shelf
· opens to the right, hinged bracket
· 143 mm wide, 102 mm high, shelf 117 mm wide, 83 mm deep
· drilling pattern is identical to that of range 477 toilet roll holder
· for wall mounting, concealed screw fitting
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive HEWI fixing material



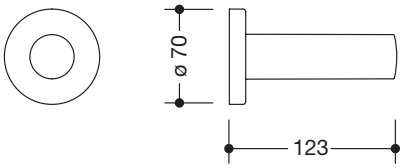

477.21.200

HEWI Spare roll holder
· concealed screw fitting to prevent unauthorised removal
· 123 mm long, ø 33 mm, rose ø 70 mm
· made of high-quality polyamide in 18 HEWI colours


8 HEWI colours

98 99 97 95 92 90 43* 77*

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number	Dimensions in mm / Specification



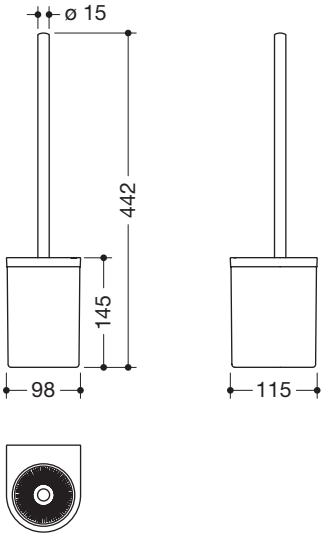

HEWI Toilet brush unit
· consisting of holder, toilet brush container and toilet brush
· brush head can be replaced due to bayonet fixing
· inner container can be removed for cleaning
· 442 mm high, 98 mm wide, 115 mm deep
· made of high-quality polyamide
· for wall mounting, concealed fixing
· including non-corrosive HEWI fixing material


700.20.00000	· in selected HEWI colours (premium colours at an additional cost)
700.20.00100	· outer container and toilet brush in HEWI colour 99 (pure white) · inner container in selected HEWI colours (premium colours at an additional cost)
700.20.00200	· outer container and toilet brush in HEWI colour 98 (signal white) · inner container in selected HEWI colours (premium colours at an additional cost)

921050	**HEWI Brush head, packing unit 1**
921051	**HEWI Brush head, packing unit 5**
921052	**HEWI Brush head, packing unit 25**

Item Number

Dimensions in mm / Specification



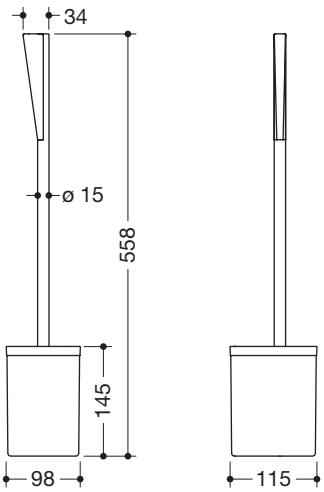



HEWI Accessible toilet brush unit
- consisting of holder, toilet brush container and toilet brush
- long brush handle with ergonomic grip and black brush head made of polyamide
- brush head can be replaced due to bayonet fixing
- inner container can be removed for cleaning
- 442 mm high, 98 mm wide, 115 mm deep
- made of high-quality polyamide
- for wall mounting, concealed fixing
- including non-corrosive HEWI fixing material

700.20.00300
- in selected HEWI colours (premium colours at an additional cost)

700.20.00400
- outer container and toilet brush in HEWI colour 99 (pure white)
- inner container in selected HEWI colours (premium colours at an additional cost)

700.20.00500
- outer container and toilet brush in HEWI colour 98 (signal white)
- inner container in selected HEWI colours (premium colours at an additional cost)



8 HEWI colours



Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

	Item Number	Dimensions in mm / Specification






700.20.00600

HEWI Toilet brush
· brush handle with replaceable brush head made of polyamide
· brush head can be replaced due to bayonet fixing
· 421 mm long
· brush handle made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)





700.20.00700


HEWI Accessible toilet brush
· long brush handle with ergonomic handle and black brush head made of polyamide
· brush head can be replaced due to bayonet fixing
· 421 mm long
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· handle made of high-quality polyamide, black

921050
921051
921052

HEWI Brush head, packing unit 1
HEWI Brush head, packing unit 5
HEWI Brush head, packing unit 25

	Item Number	Dimensions in mm / Specification




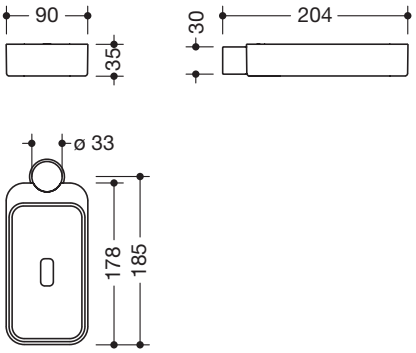

700.03.00000


HEWI Shower basket for shower rails
· can be retrofitted on vertical rails ø 33 mm
· with drainage holes
· can be fitted without tools
· 90 mm wide, 35 mm high, 204 mm deep
· made of high-quality polyamide in 18 HEWI colours (premium colours at an additional cost)



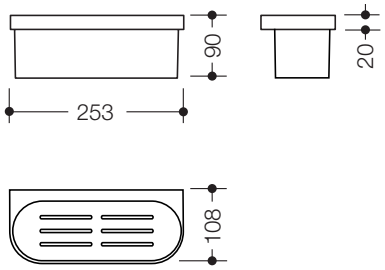

700.03.00100

HEWI Shower basket
· 253 mm wide, 90 mm high and 108 mm deep
· for wall mounting, concealed fixing
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive HEWI fixing material



700.33.00000

HEWI Mobile shower head holder
· for support grab rails and L-shaped support rails with shower head holder
· suitable for various manufacturers' shower heads
· can be retrofitted on horizontal rails ø 33 mm
· can be fitted without tools
· conical adapter facilitates accommodation of handspray
· 47 mm high, 31 mm wide, 72 mm deep
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)

---

18 HEWI colours

98 99 97 95 92 90 84 86

18 24 36 33 43* 74 72 77* 55 50


800.03.010

HEWI Insert shower basket

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number	Dimensions in mm / Specification



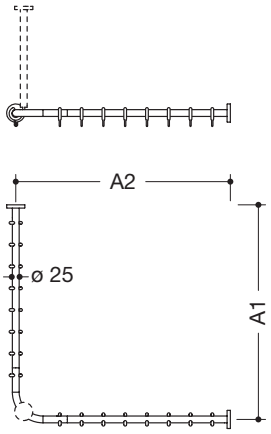

HEWI Shower curtain rail
· rails made of high-quality stainless steel, ø 25 mm, roses ø 70 mm
· can be shortened at the ends to 320 mm on site
· fixing with roses to wall and ceiling, ceiling support required
· powder-coated in selected HEWI colours
(premium colours at an additional cost)
· curtain rings white, for HEWI colour PX (jet black) black
· including non-corrosive and tested HEWI fixing material as well as sealing tape for sealing the drill holes

700.34.10060 **for shower tray 800 x 800 mm**
· c to c 787 x 787 mm, with 16 curtain rings
· recommended HEWI standard width (F) 2300 mm

700.34.10160 **for shower tray 900 x 900 mm**
· c to c 887 x 887 mm, with 18 curtain rings
· recommended HEWI standard width (F) 2500 mm

700.34.10260 **for shower tray 1000 x 1000 mm**
· c to c 987 x 987 mm, with 20 curtain rings
· recommended HEWI standard width (F) 2900 mm

700.34.10660 **for shower tray 1000 x 1200 mm**
· c to c 987 x 1187 mm, with 24 curtain rings
· recommended HEWI standard width (F) 2900 mm

700.34.10360 **for shower tray 1200 x 1200 mm**
· c to c 1187 x 1187 mm, with 24 curtain rings
· recommended HEWI standard width (F) 3500 mm

700.34.10460 **for shower tray 1500 x 1500 mm**
· c to c 1487 x 1487 mm, with 28 curtain rings
· recommended HEWI standard width (F) 4000 mm

700.34.10560 **for shower tray 2000 x 2000 mm**
· c to c 1987 x 1987 mm, with 40 curtain rings
· recommended HEWI standard width (F) 2 x 2500 mm


700.34.10S60 **HEWI Shower curtain rail, special lengths**
· do., with suitable number of curtain rings, length to order


	A1	A2
min.	320 mm	320 mm
max.	1987 mm	1987 mm

Please advise A1 and A2 when ordering.

921056 **HEWI Curtain rings packing unit 5 pcs., white**
921060 **HEWI Curtain rings packing unit 5 pcs., black**
700.34.0... **HEWI Ceiling support** to be ordered separately see page 15
HEWI Shower curtain see online-catalogue

Item Number | Dimensions in mm / Specification

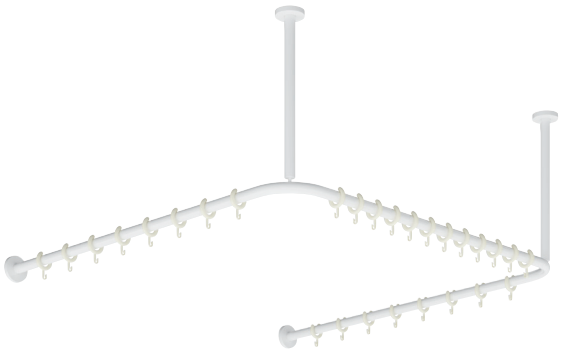

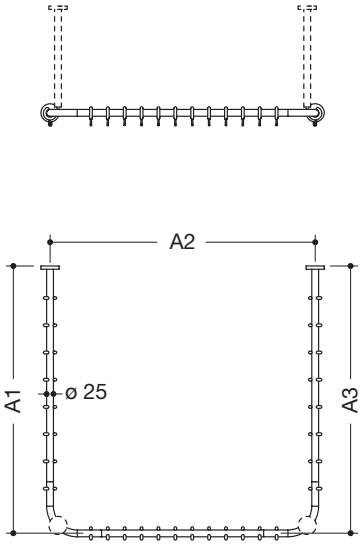

HEWI Shower curtain rail
· rails made of high-quality stainless steel, ø 25 mm, roses ø 70 mm
· can be shortened at the ends to 320 mm on site, middle rail not shortenable
· fixing with roses to wall and ceiling
· two ceiling supports required (max. 600 mm long)
· powder-coated in selected HEWI colours (premium colours at an additional cost)
· curtain rings white, for HEWI colour PX (jet black) black
· including non-corrosive and tested HEWI fixing material as well as sealing tape for sealing the drill holes

700.34.30060
for shower tray 1000 x 1000 mm
· c to c 987 x 975 x 987 mm, with 28 curtain rings
· recommended HEWI standard width (F) 4000 mm

700.34.30160
for shower tray 1200 x 1200 mm
· c to c 1187 x 1175 x 1187 mm, with 34 curtain rings
· recommended HEWI standard width (F) 5000 mm


700.34.30260
for shower tray 1500 x 1500 mm
· c to c 1487 x 1475 x 1487 mm, with 46 curtain rings
· recommended HEWI standard width (F) 2 x 3000 mm


HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number	Dimensions in mm / Specification

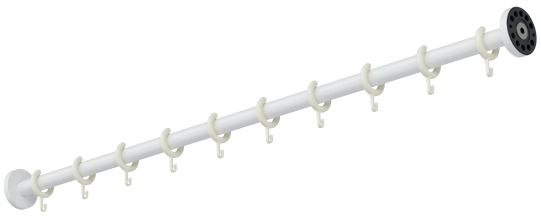




HEWI Shower curtain rail
· made of stainless steel, rail ø 25 mm, roses ø 70 mm
· can be shortened on site to 200 mm
· recommended curtain width 1200 mm
· powder-coated in selected HEWI colours (premium colours at an additional cost)
· curtain rings white, for HEWI colour PX (jet black) black
· including non-corrosive and tested HEWI fixing material as well as sealing tape for sealing the drill holes



700.34.40060 · length 1000 mm, with 10 curtain rings
700.34.40360 · length 2000 mm, with 20 curtain rings



700.34.40S60


HEWI Shower curtain rail, special length
· do., to order from 400 mm to 2000 mm
· with suitable number of curtain rings
· powder-coated in selected HEWI colours (premium colours at an additional cost)



921056 **HEWI Curtain rings packing unit 5 pcs., white**
921060 **HEWI Curtain rings packing unit 5 pcs., black**
HEWI Shower curtain see online-catalogue

Item Number	Dimensions in mm / Specification





HEWI Ceiling support
· made of stainless steel, rail ø 25 mm, rose ø 70 mm
· can be shortened to a length of up to 200 mm at the rose on site
· fitted to ceiling with rose fixing
· powder-coated in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive and tested HEWI fixing material as well as sealing tape for sealing the drill holes

c to c (curtain rail - ceiling axle)

700.34.00060	300 mm
700.34.00160	400 mm
700.34.00260	500 mm
700.34.00360	600 mm
700.34.00S60	min. 150 - 299 mm
700.34.01S60	301 - max. 1500 mm

HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

S 700
Accessibility





Item Number

Dimensions in mm / Specification

Drill hole



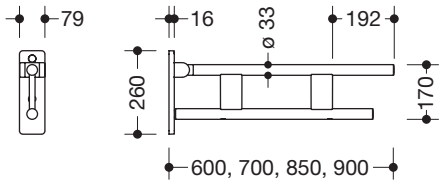

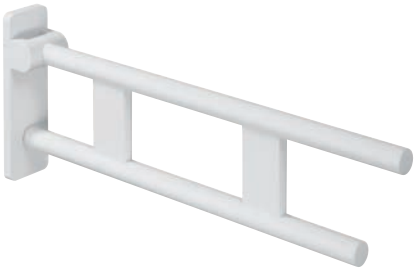



HEWI Hinged support rail
- can be folded upwards and, with friction device, downwards
- 79 mm wide and 260 mm high, rails ø 33 mm
- made of high-quality polyamide with continuous, corrosion resistant steel core and wall plate made of polyamide with integrated steel core
- drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
- tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
- covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
- upgrade kit toilet roll holder 700.50.00000 and floor supports 950.50.021XA and 950.50.023XA for retrofitting
- sealing tape for sealing the fixing points included in delivery
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

	projection
700.50.10100	600 mm
700.50.10200	700 mm
700.50.10300	850 mm
700.50.10400	900 mm

Drill hole



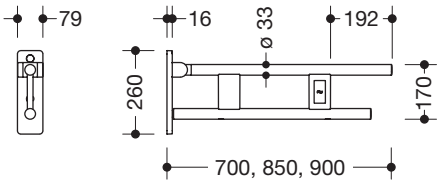

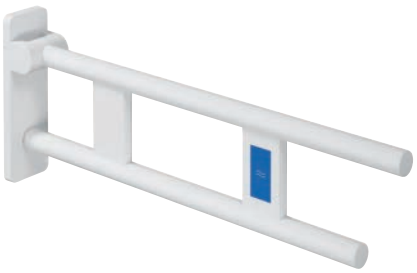

HEWI Hinged support rail with WC flushing mechanism (radio)
- can be folded upwards and, with friction device, downwards
- blue button (wave symbol) is used to flush the WC
- transmission frequency 868.4 MHz and bluetooth (2,4 GHz)
- suitable for radio WC flushing systems by Geberit, Mepa, Viega, Sanit, Friatec, TECE and Grohe
- 79 mm wide and 260 mm high, rails ø 33 mm
- made of high-quality polyamide with continuous, corrosion resistant steel core and wall plate made of polyamide with integrated steel core
- drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
- tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
- covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
- upgrade kit toilet roll holder 700.50.00000 and floor supports 950.50.021XA and 950.50.023XA for retrofitting
- sealing tape for sealing the fixing points included in delivery
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

projection	version left (from users point of view)	version right (from users point of view)
700 mm	**700.50.10500**	**700.50.10600**
850 mm	**700.50.10700**	**700.50.10800**
900 mm	**700.50.10900**	**700.50.11000**

8 HEWI colours

98 99 97 95 92 90 43* 77*

BM10.2 – BM18.2


HEWI Fixing material for hinged support rails
to be ordered separately, see page 49
Upgrade kits for hinged support rails see pages 24-25


Item Number

Dimensions in mm / Specification

Drill hole



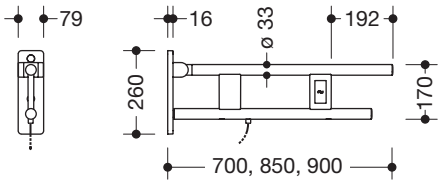

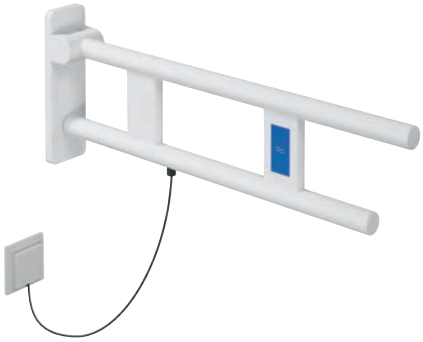


HEWI Hinged support rail with WC flushing mechanism (model E)


· can be folded upwards and, with friction device, downwards
· blue button (wave symbol) is used to flush the WC
· cable with free cable ends for wall connection
· incl. white cover for the flush-mounted socket
· control voltage max. 30 V = SELV, PELV, switching current up to max. 2 A
· suitable for all standard UP flushing cisterns with an electrical control unit
· 79 mm wide and 260 mm high, rails ø 33 mm
· made of high-quality polyamide with continuous, corrosion resistant steel core and wall plate made of polyamide with integrated steel core
· drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
· tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
· covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape for sealing the fixing points included in delivery
· fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

projection	version left (from users point of view)	version right (from users point of view)
700 mm	**700.50.11100**	**700.50.11200**
850 mm	**700.50.11300**	**700.50.11400**
900 mm	**700.50.11500**	**700.50.11600**

Drill hole



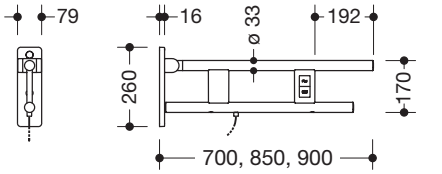

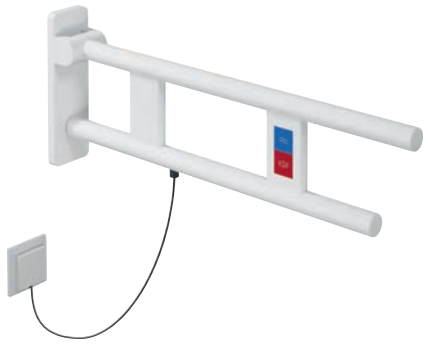

HEWI Hinged support rail with flushing solution/function button (model E)

· can be folded upwards and, with friction device, downwards
· blue button (wave symbol) is used to flush the WC, red button (bell symbol) serves to trigger a freely definable function (the function button does not meet the emergency call requirements acc. to DIN VDE 0834-1)
· cable with free cable ends for wall connection
· incl. white cover for the flush-mounted socket
· control voltage max. 30 V = SELV, PELV, switching current up to max. 2 A
· suitable for all standard UP flushing cisterns with an electrical control unit
· 79 mm wide and 260 mm high, rails ø 33 mm
· made of high-quality polyamide with continuous, corrosion resistant steel core and wall plate made of polyamide with integrated steel core
· drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
· tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
· covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape for sealing the fixing points included in delivery
· fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500


projection	version left (from users point of view)	version right (from users point of view)
700 mm	**700.50.11700**	**700.50.11800**
850 mm	**700.50.11900**	**700.50.12000**
900 mm	**700.50.12100**	**700.50.12200**

Item Number

Dimensions in mm / Specification

Drill hole



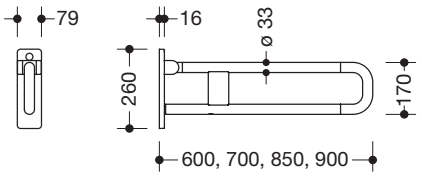




HEWI Hinged support rail
- can be folded upwards and, with friction device, downwards
- 79 mm wide and 260 mm high, rails ø 33 mm
- made of high-quality polyamide with continuous, corrosion resistant steel core and wall plate made of polyamide with integrated steel core
- drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
- tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
- covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
- upgrade kit toilet roll holder 700.50.00000 and floor supports 950.50.021XA and 950.50.023XA for retrofitting
- sealing tape for sealing the fixing points included in delivery
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

	projection
700.50.00100	600 mm
700.50.00200	700 mm
700.50.00300	850 mm
700.50.00400	900 mm



Drill hole



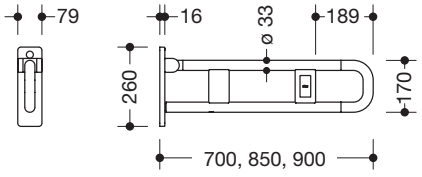

HEWI Hinged support rail with WC flushing mechanism (radio)
- can be folded upwards and, with friction device, downwards
- blue button (wave symbol) is used to flush the WC
- transmission frequency 868.4 MHz and bluetooth (2,4 GHz)
- suitable for radio WC flushing systems by Geberit, Mepa, Viega, Sanit, Friatec, TECE and Grohe
- 79 mm wide and 260 mm high, rails ø 33 mm
- made of high-quality polyamide with continuous, corrosion resistant steel core and wall plate made of polyamide with integrated steel core
- drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
- tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
- covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
- upgrade kit toilet roll holder 700.50.00000 and floor supports 950.50.021XA and 950.50.023XA for retrofitting
- sealing tape for sealing the fixing points included in delivery
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

projection	version left (from users point of view)	version right (from users point of view)
700 mm	**700.50.00500**	**700.50.00600**
850 mm	**700.50.00700**	**700.50.00800**
900 mm	**700.50.00900**	**700.50.01000**



8 HEWI colours

98 99 97 95 92 90 43* 77*


BM10.2 – BM18.2


HEWI Fixing material for hinged support rails
to be ordered separately, page 49
Upgrade kits for hinged support rails see pages 24-25


Item Number

Dimensions in mm / Specification

Drill hole



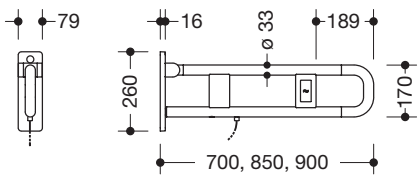

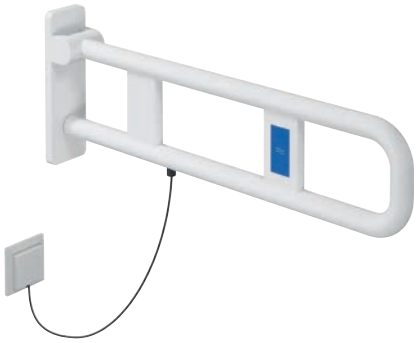



HEWI Hinged support rail with WC flushing mechanism (model E)


· can be folded upwards and, with friction device, downwards
· blue button (wave symbol) is used to flush the WC
· cable with free cable ends for wall connection
· incl. white cover for the flush-mounted socket
· control voltage max. 30 V = SELV, PELV, switching current up to max. 2 A
· suitable for all standard UP flushing cisterns with an electrical control unit
· 79 mm wide and 260 mm high, rails ø 33 mm
· made of high-quality polyamide with continuous, corrosion resistant steel core and wall plate made of polyamide with integrated steel core
· drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
· tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
· covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape for sealing the fixing points included in delivery
· fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

projection	version left (from users point of view)	version right (from users point of view)
700 mm	**700.50.01100**	**700.50.01200**
850 mm	**700.50.01300**	**700.50.01400**
900 mm	**700.50.01500**	**700.50.01600**

Drill hole



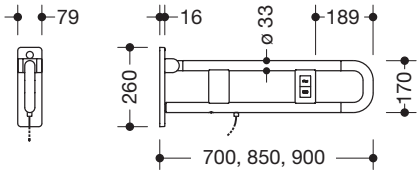

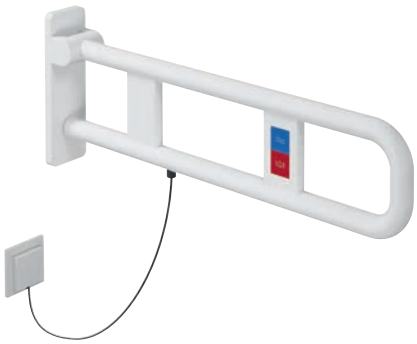

HEWI Hinged support rail with flushing solution/function button (model E)

· can be folded upwards and, with friction device, downwards
· blue button (wave symbol) is used to flush the WC, red button (bell symbol) serves to trigger a freely definable function (the function button does not meet the emergency call requirements acc. to DIN VDE 0834-1)
· cable with free cable ends for wall connection
· incl. white cover for the flush-mounted socket
· control voltage max. 30 V = SELV, PELV, switching current up to max. 2 A
· suitable for all standard UP flushing cisterns with an electrical control unit
· 79 mm wide and 260 mm high, rails ø 33 mm
· made of high-quality polyamide with continuous, corrosion resistant steel core and wall plate made of polyamide with integrated steel core
· drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
· tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
· covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape for sealing the fixing points included in delivery
· fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500


projection	version left (from users point of view)	version right (from users point of view)
700 mm	**700.50.01700**	**700.50.01800**
850 mm	**700.50.01900**	**700.50.02000**
900 mm	**700.50.02100**	**700.50.02200**


Item Number

Dimensions in mm / Specification

Drill hole



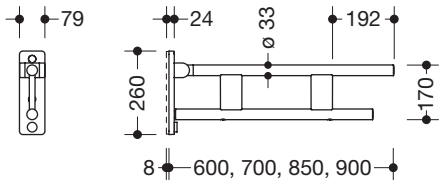

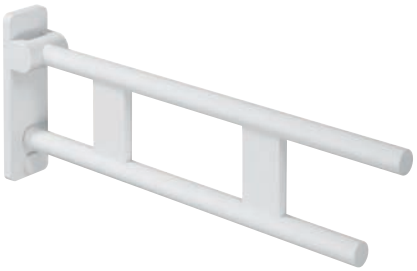

HEWI Mobile hinged support rail


- can be folded upwards and, with friction device, downwards
- for mobile use
- for easy and flexible retrofitting on pre-assembled 8 mm HEWI mounting plate 700.50.16160 (to be ordered separately)
- toolless and quick installation by simple attachment of the mobile hinged support rails
- secured by fixing screw to prevent unintentional removal
- 79 mm wide and 260 mm high, rails ø 33 mm
- made of high-quality polyamide with continuous corrosion resistant steel core
- drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
- tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
- upgrade kit toilet roll holder 700.50.00000 and floor supports 950.50.021XA and 950.50.023XA for retrofitting
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

	projection
700.50.15100	600 mm
700.50.15200	700 mm
700.50.15300	850 mm
700.50.15400	900 mm



Drill hole



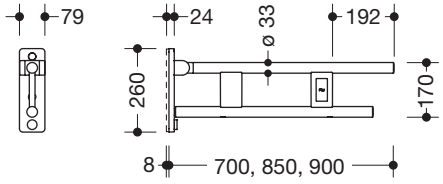

HEWI Mobile hinged support rail with WC flushing mechanism (radio)

- can be folded upwards and, with friction device, downwards
- for mobile use
- for easy and flexible retrofitting on pre-assembled 8 mm HEWI mounting plate 700.50.16160 (to be ordered separately)
- toolless and quick installation by simple attachment of the mobile hinged support rails
- secured by fixing screw to prevent unintentional removal
- blue button (wave symbol) is used to flush the WC
- transmission frequency 868.4 MHz and bluetooth (2,4 GHz)
- suitable for radio WC flushing systems by Geberit, Mepa, Viega, Sanit, Friatec, TECE and Grohe
- 79 mm wide and 260 mm high, rails ø 33 mm
- made of high-quality polyamide w. continuous corrosion resistant steel core
- drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
- tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
- upgrade kit toilet roll holder 700.50.00000 and floor supports 950.50.021XA and 950.50.023XA for retrofitting
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

projection	version left (from users point of view)	version right (from users point of view)
700 mm	**700.50.15500**	**700.50.15600**
850 mm	**700.50.15700**	**700.50.15800**
900 mm	**700.50.15900**	**700.50.16000**



8 HEWI colours

98 99 97 95 92 90 43* 77*

BM10.2 – BM18.2

HEWI Fixing material for hinged support rails
to be ordered separately, page 49


Upgrade kits for hinged support rails see pages 24-25

Item Number

Dimensions in mm / Specification

Drill hole



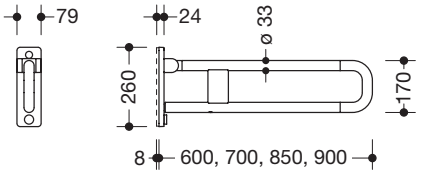



HEWI Mobile hinged support rail


- can be folded upwards and, with friction device, downwards
- for mobile use
- for easy and flexible retrofitting on pre-assembled 8 mm HEWI mounting plate 700.50.16160 (to be ordered separately)
- toolless and quick installation by simple attachment of the mobile hinged support rails
- secured by fixing screw to prevent unintentional removal
- 79 mm wide and 260 mm high, rails ø 33 mm
- made of high-quality polyamide w. continuous corrosion resistant steel core
- drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
- tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
- upgrade kit toilet roll holder 700.50.00000 and floor supports 950.50.021XA and 950.50.023XA for retrofitting
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500


	projection
700.50.05100	600 mm
700.50.05200	700 mm
700.50.05300	850 mm
700.50.05400	900 mm



Drill hole



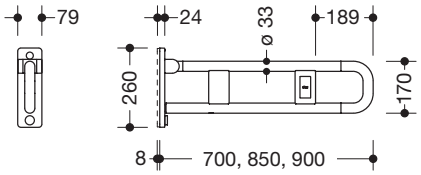

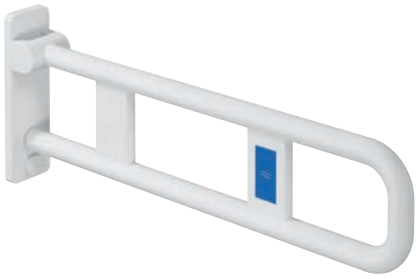


HEWI Mobile hinged support rail with WC flushing mechanism (radio)

- can be folded upwards and, with friction device, downwards
- for mobile use
- for easy and flexible retrofitting on pre-assembled 8 mm HEWI mounting plate 700.50.16160 (to be ordered separately)
- toolless and quick installation by simple attachment of the mobile hinged support rails
- secured by fixing screw to prevent unintentional removal
- blue button (wave symbol) is used to flush the WC
- transmission frequency 868.4 MHz and bluetooth (2,4 GHz)
- suitable for radio WC flushing systems by Geberit, Mepa, Viega, Sanit, Friatec, TECE and Grohe
- 79 mm wide and 260 mm high, rails ø 33 mm
- made of high-quality polyamide w. continuous corrosion resistant steel core
- drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
- tested up to 150 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg
- upgrade kit toilet roll holder 700.50.00000 and floor supports 950.50.021XA and 950.50.023XA for retrofitting
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

projection	version left (from users point of view)	version right (from users point of view)
700 mm	**700.50.05500**	**700.50.05600**
850 mm	**700.50.05700**	**700.50.05800**
900 mm	**700.50.05900**	**700.50.06000**



8 HEWI colours



98 99 97 95 92 90 43* 77*


Item Number

Dimensions in mm / Specification



Drill hole






700.50.16160

HEWI Mounting plate
· rectangular mounting plate
· to hold and fix the mobile hinged support rails S 700
· 76 mm wide, 257 mm high and 8 mm deep
· made of high-quality stainless steel, powder-coated
· for wall-mounting with non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
· drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
· sealing tape for sealing the fixing points included in delivery

---




700.50.16260

HEWI Cover for mounting plate
· rectangular cover
· HEWI Cover for mounting plate
· to cover the mounting plate by magnetic fastenings
· 82 mm wide, 265 mm high, 19 mm deep
· front panel made of high-quality stainless steel, powder-coated, frame made from high quality polyamide in selected HEWI colours (premium colours at an additional cost)

Drill hole







700.50.16360

HEWI Mounting plate with cover
· for hinged support rails S 700
· 82 mm wide, 265 mm high, 19 mm deep
· mounting plate and front panel of the cover made of stainless steel, powder-coated, with a cover frame made of high quality polyamide in selected HEWI colours (premium colours at an additional cost)
· for wall-mounting with non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately)
· drilling pattern is identical to that of the S 801 wall-mounted hinged support rails
· sealing tape for sealing the fixing points included in delivery

---

HEWI Powder-coated surfaces


- ☐ **... KM** signal white
- ☐ **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*


BM10.2 – BM18.2

HEWI Fixing material for hinged support rails
to be ordered separately, page 49
Upgrade kits for hinged support rails see pages 24-25

Item Number


Dimensions in mm / Specification

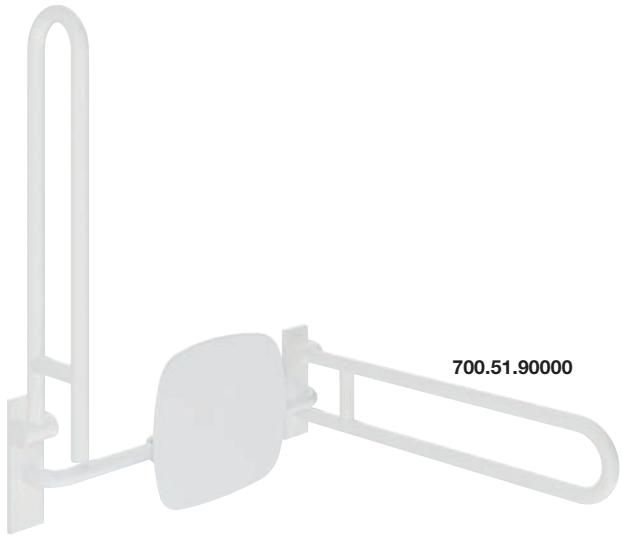

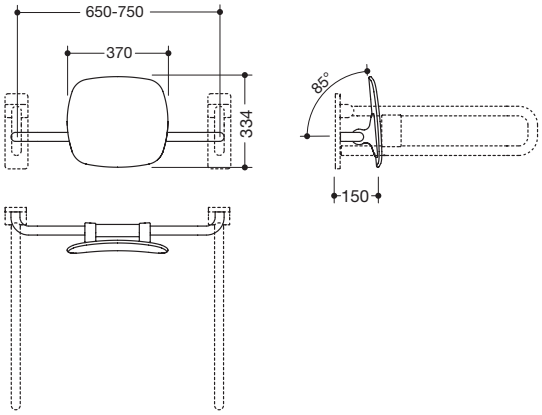

700.51.90000


HEWI Backrest rail
· backrest with right-angled fixing rails on each side
· mounting to hinged support rails S 700 and S 801
· adjustable on site
· 650 bis 750 mm wide, 150 mm deep
· backrest 334 mm high and 370 mm wide, rails ø 33 mm
· with continuous corrosion resistant steel core
· connection made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· backrest made of matt synthetic material in colour of the connection
· fulfils the requirements acc. to DIN 18040 and ÖNORM B1600/1601

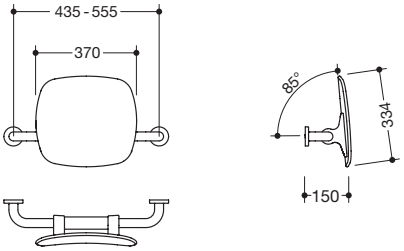

700.51.90400

HEWI Backrest rail
· backrest with right-angled fixing rails on each side and fixing roses
· mounting to the wall with roses
· adjustable on site
· 435 bis 550 mm wide, 150 mm deep
· backrest 334 mm high and 370 mm wide, rails ø 33 mm, roses ø 70 mm
· with continuous corrosion resistant steel core
· connection made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· backrest made of matt synthetic material in colour of the connection
· fulfils the requirements acc. to DIN 18040 and BS-Standard BS 8300:2009 (+A1:2010)/Doc M




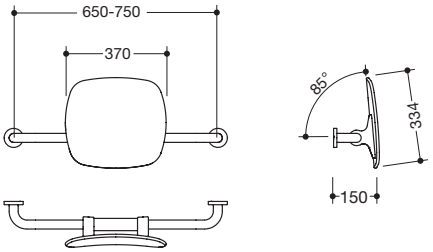

700.51.90100

HEWI Backrest rail
· do., 650 to 750 mm wide
· fulfils the requirements acc. to ÖNORM B1600/1601

Item Number	Dimensions in mm / Specification

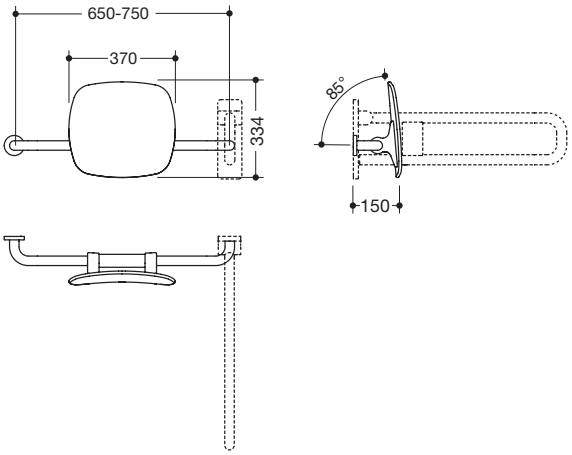

Ausführung links


HEWI Backrest rail
· backrest with right-angled fixing rails on each side and fixing rose
· one-sided wall mounting with roses
· one-sided mounting with hinged support rails S 700 and S 801
· adjustable on site
· 650 to 750 mm wide, 150 mm deep, backrest 334 mm high and 370 mm wide, rails ø 33 mm, rose ø 70 mm
· with continuous corrosion resistant steel core
· connection made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· backrest made of matt synthetic material in colour of the connection
· fulfils the requirements acc. to DIN 18040 and ÖNORM B1600/1601

700.51.90200 **Version left** (from users point of view)
· rail left, rose right

700.51.90300 **Version right**
· rail right, rose left

Attention: Fixing material for backrest rail BM1...2.2 on handle side order separately according to table below (and see page 50)

Supplied only with HEWI fixing material.





700.50.00000

HEWI Upgrade kit toilet roll holder
· right angle-shaped upgrade kit toilet roll holder
· for simple installation and for retrofitting to hinged support rails with ø 33 mm
· can be fitted without tools, can be fitted without tools
· 38 mm wide, 153 mm high, 143 mm deep
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)

Fixing material for backrest rail to hinged support rail see page 50


Hinged support rail	**Backrest rail** both sides	**Backrest rail** one-sided
BM10.2, BM17.2	**BM10.2.1**	**BM10.2.2**
BM11.2, BM18.2	**BM11.2.1**	**BM11.2.2**
BM12.2	**BM12.2.1**	**BM12.2.2**
BM13.2	**BM13.2.1**	**BM13.2.2**

8 HEWI colours

98 99 97 95 92 90 43* 77*

Item Number	Dimensions in mm / Specification




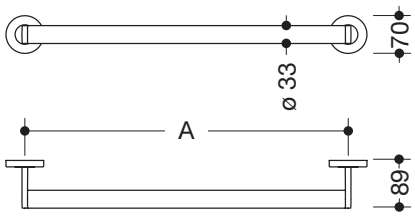

HEWI Support rail
· rail ø 33 mm, 89 mm deep, roses ø 70 mm
· clearance to the wall 56 mm
· with continuous corrosion resistant steel core
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· for HEWI removable hanging seats as per table

700.36.00000	A1 = 250 mm
700.36.00100	A1 = 300 mm
700.36.00200	A1 = 400 mm
700.36.00300	A1 = 500 mm
700.36.00400	A1 = 600 mm
700.36.00500	A1 = 800 mm
700.36.00600	A1 = 1000 mm, not suitable for removable hanging
700.36.0S000	A1 = 220 - 1100 mm, additional support from 850 mm

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

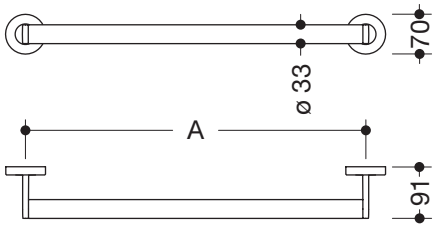


HEWI Mobile support rail
· do., 91 mm deep, clearance to the wall 58 mm
· easy installation due to individually mountable stainless steel fixing plates (included in delivery), for hanging the support rail
· is secured with fastening screw (theft protection)
· cannot be used with removable hanging seats

700.36.02000	A1 = 250 mm
700.36.02100	A1 = 300 mm
700.36.02200	A1 = 400 mm
700.36.02300	A1 = 500 mm
700.36.02400	A1 = 600 mm
700.36.02500	A1 = 800 mm
700.36.02600	A1 = 1000 mm, not suitable for removable hanging
700.36.0S100	A1 = 220 - 1100 mm, additional support from 850 mm

700.33.00000	**HEWI Mobile shower head holder** see page 11
700.50.00000	**HEWI Upgrade kit toilet roll holder** see page 25

	Item Number	Dimensions in mm / Specification






900.36.018XA

HEWI Mounting plate for mobile support rails
· to hold and fix mobile support rails 700.36...
· 40 mm wide, 47 mm high, 7 mm deep
· made of stainless steel
· for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)






700.36.01800

HEWI Cover for mounting plate of mobile support rails and backrests
· for cover of the mounting plate by simple replacement
· is secured with fastening screw (theft protection)
· ø 70 mm, 12 mm deep
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)





700.36.01900


HEWI Mounting plate with cover of mobile support rails
· rectangular mounting plate with matching, round cover
· to hold mobile support rails 700.36...
· cover ø 70 mm, 12 mm deep
· cover made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· mounting plate made of stainless steel
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· supplied per pair

---

8 HEWI colours

98 99 97 95 92 90 43* 77*

Item Number	Dimensions in mm / Specification

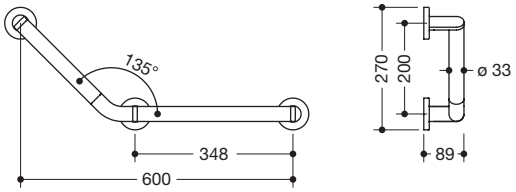




700.22.00000

HEWI L-shaped support rail
· with continuous corrosion resistant steel core
· c to c 600 mm and 200 mm, angle 135°
· rails ø 33 mm, 89 mm deep, roses ø 70 mm
· clearance to the wall 56 mm
· increased stability thanks to 3 supports
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· can be mounted in left hand or right hand position
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg
· upgrade kit toilet roll holder 700.50.00000 and upgrade kit WC-toilet flushing solution (radio) 801.50.060 for retrofitting



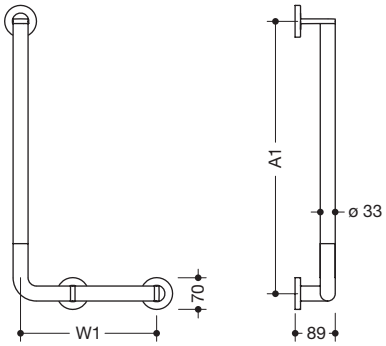



HEWI L-shaped support rail
· with continuous corrosion resistant steel core
· rails ø 33 mm, 89 mm deep, roses ø 70 mm
· clearance to the wall 56 mm
· can be mounted in left hand or right hand position
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg
· upgrade kit toilet roll holder 700.50.00000 and upgrade kit WC-toilet flushing solution (radio) 801.50.060 for retrofitting

700.22.00100	A1 = 600 mm, W1 = 300 mm
700.22.00200[1)]	A1 = 750 mm, W1 = 500 mm
700.22.00300[2)]	A1 = 1000 mm, W1 = 500 mm
700.22.00400	A1 = 350 mm, W1 = 350 mm
700.22.0S000	A1 / W1 = 600 - 1100 mm / 300 - 850 mm**




**Please advise A1 and W1 when ordering.

[1)] fulfils ÖNORM B 1600/1601
[2)] fulfils SIA 500

700.03.00100	**HEWI Shower basket** see page 11
700.33.00000	**HEWI Mobile shower head holder** see page 11
700.50.00000	**HEWI Upgrade kit toilet roll holder** see page 25

Item Number | Dimensions in mm / Specification






HEWI Rail with shower head holder
- automatic shower head: The shower head holder can be moved smoothly, automatic locking, simple and intuitive one-hand operation
- wear-free clamping mechanism
- conical holder on the shower holder can be adjusted to any angle
- rails ø 33 mm, 89 mm deep, roses ø 70 mm
- clearance to the wall 56 mm
- suitable for various manufacturers' shower heads
- with continuous corrosion resistant steel core
- made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
- including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes

700.33.02000	A = 600 mm
700.33.02100	A = 900 mm
700.33.02200	A = 1100 mm
700.33.0S100	A = 600 - 1250 mm**

**Please advise A when ordering.



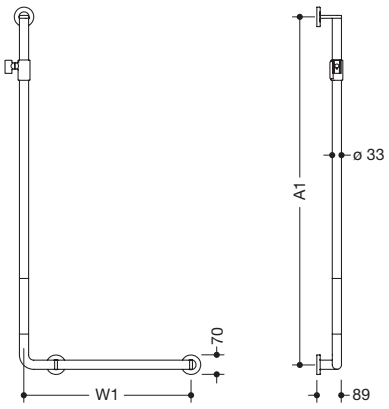

HEWI L-shaped support rail with shower head holder
- automatic shower head: The shower head holder can be moved smoothly, automatic locking, simple and intuitive one-hand operation
- wear-free clamping mechanism
- conical holder on the shower holder can be adjusted to any angle
- rails ø 33 mm, 89 mm deep, roses ø 70 mm, clearance to the wall 56 mm
- can be mounted in left hand or right hand position
- suitable for various manufacturers' shower heads
- with continuous corrosion resistant steel core
- made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
- including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
- tested up to 200 kg when used with HEWI fixing material
- recommended maximum weight of the user: 150 kg
- fulfils the requirements acc. to ÖNORM B1600/1601 and SIA 500

700.33.00100	A1 = 1250 mm, W1 = 400 mm
700.33.00200	A1 = 1250 mm, W1 = 600 mm
700.33.0S000	A1 / W1 = 600 - 1250 mm / 300 - 850 mm**


8 HEWI colours

98 99 97 95 92 90 43* 77*

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

**Please advise A1 and W1 when ordering.

	Item Number	Dimensions in mm / Specification

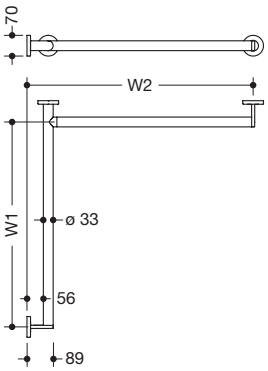




HEWI Shower grab rail
· rails ø 33 mm, 89 mm deep, roses ø 70 mm
· clearance to the wall 56 mm
· reduced number of fixing roses thanks to a mitre cut in the corner
· can be mounted in left hand or right hand position
· with continuous corrosion resistant steel core
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· wall mounting with wall-specific HEWI fixing material and roses
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg


**Please advise W1 and W2 when ordering.
If the horizontal length is 850 mm or greater, an additional wall support is required.

700.35.30000 W1 = 765 mm, W2 = 765 mm
700.35.3S000 W1/W2 = 475 - 1800 mm**

---

kiwa EPD







HEWI Shower grab rail
· rails ø 33 mm, 89 mm deep, roses ø 70 mm
· clearance to the wall 56 mm
· can be mounted in left hand or right hand position
· with continuous corrosion resistant steel core
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· wall mounting with wall-specific fixing HEWI material and roses
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg


**Please advise W1 and W2 when ordering.
For horizontal lengths of 1000 mm or more, an additional support is required, as the maximum support spacing is 850 mm.


700.35.00000 W1 = 762 mm, W2 = 762 mm
700.35.00100 W1 = 962 mm, W2 = 962 mm
700.35.0S000 W1/W2 = 475 - 1800 mm**

700.03.00100 **HEWI Shower basket** see page 11
700.33.00000 **HEWI Mobile shower head holder** see page 11

Item Number

Dimensions in mm / Specification

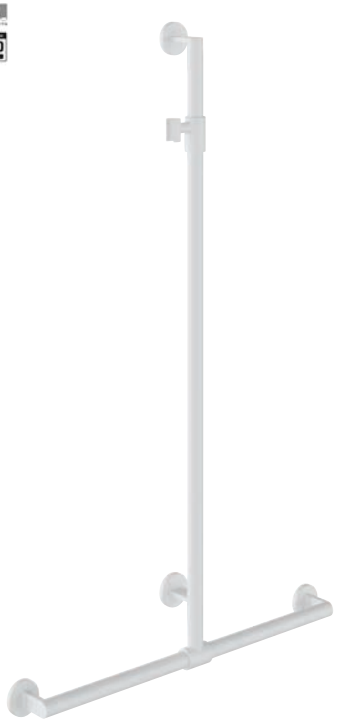

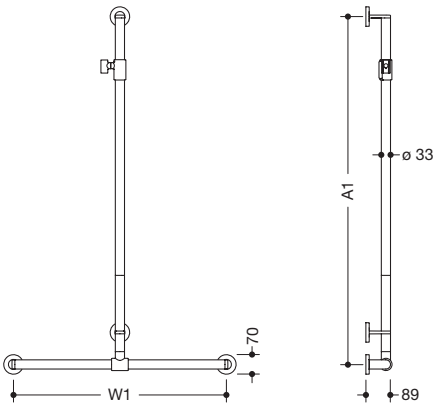



HEWI Rail with sideways adjustable vertical support bar and shower head holder

· automatic shower head: The shower head holder can be moved smoothly, automatic locking, simple and intuitive one-hand operation
· wear-free clamping mechanism
· conical holder on the shower holder can be adjusted to any angle
· with sideways adjustable vertical rail with shower head holder
· rails ø 33 mm, 89 mm deep, roses ø 70 mm, clearance to the wall 56 mm
· suitable for various manufacturers' shower heads
· with continuous corrosion resistant steel core
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg

**Please advise A1 and W1 when ordering.

700.35.00200	A1 = 1250 mm, W1 = 762 mm
700.35.00300	A1 = 1250 mm, W1 = 962 mm
700.35.0S100	A1 = 600 - 1250 mm, W1 = 300 - 1500 mm**

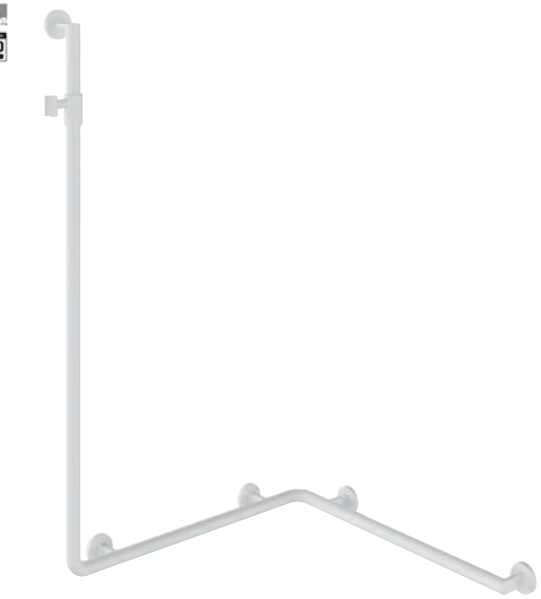

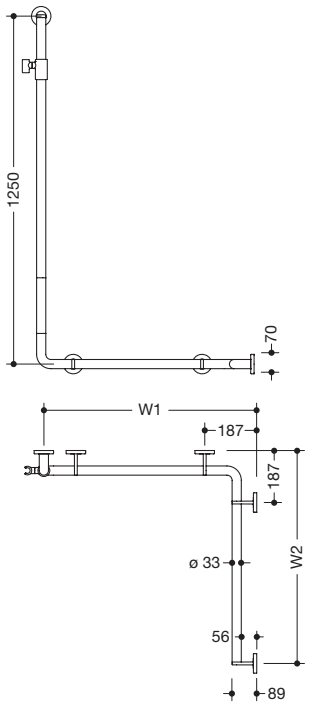

HEWI Rail with vertical support bar and shower head holder

· do., can be mounted in left hand or right hand position

**Please advise A1, W1 and W2 when ordering. For horizontal lengths of 1000 mm or more, an additional support is required, as the maximum support spacing is 850 mm.


700.35.00400	A1 = 1250 mm, W1/W2 = 762 mm
700.35.0S200	A1 = 600 - 1250 mm, W1/W2 = 475 - 1800 mm**


8 HEWI colours

98 99 97 95 92 90 43* 77*

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

Item Number	Dimensions in mm / Specification

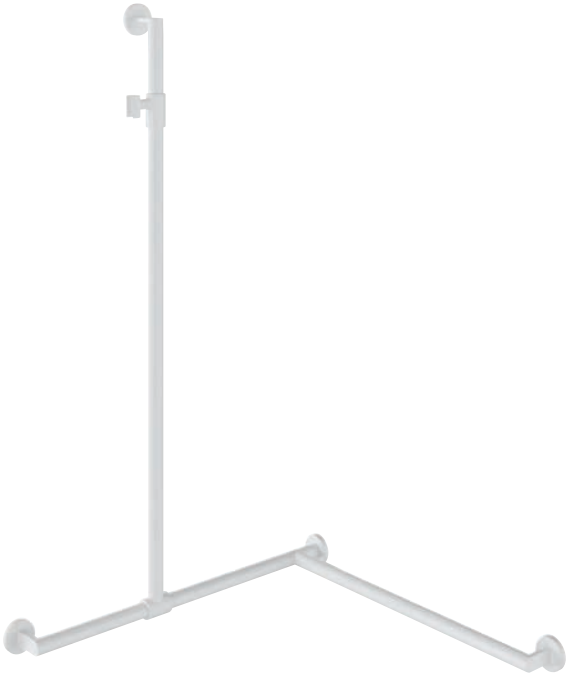

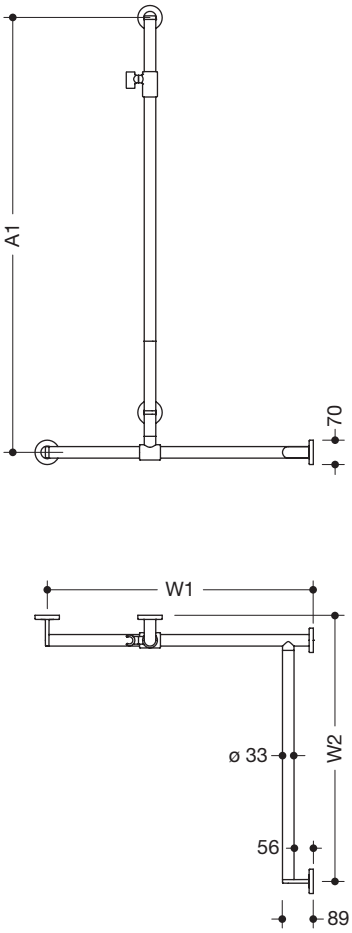

HEWI Rail with sideways adjustable vertical support bar and shower head holder


· reduced number of fixing roses thanks to a mitre cut in the corner
· automatic shower head: The shower head holder can be moved smoothly, automatic locking, simple and intuitive one-hand operation
· wear-free clamping mechanism
· conical holder on the shower holder can be adjusted to any angle
· with sideways adjustable vertical rail with shower head holder
· can be mounted in left hand or right hand position
· rails ø 33 mm, 89 mm deep, roses ø 70 mm
· clearance to the wall 56 mm
· with continuous corrosion resistant steel core
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg


⊘ □ ■ ■ ■ ■ ■ ■	**700.35.30500**	A1 = 1250 mm, W1/W2 = 765 mm
	700.35.3S300	A1 = 600 - 1250 mm, W1/W2 = 475 - 1800 mm**

**Please advise A1, W1 and W2 when ordering.
If the horizontal length is 850 mm or greater, an additional wall support is required.

700.03.00100	**HEWI Shower basket** see page 11
700.33.00000	**HEWI Mobile shower head holder** see page 11

Item Number	Dimensions in mm / Specification

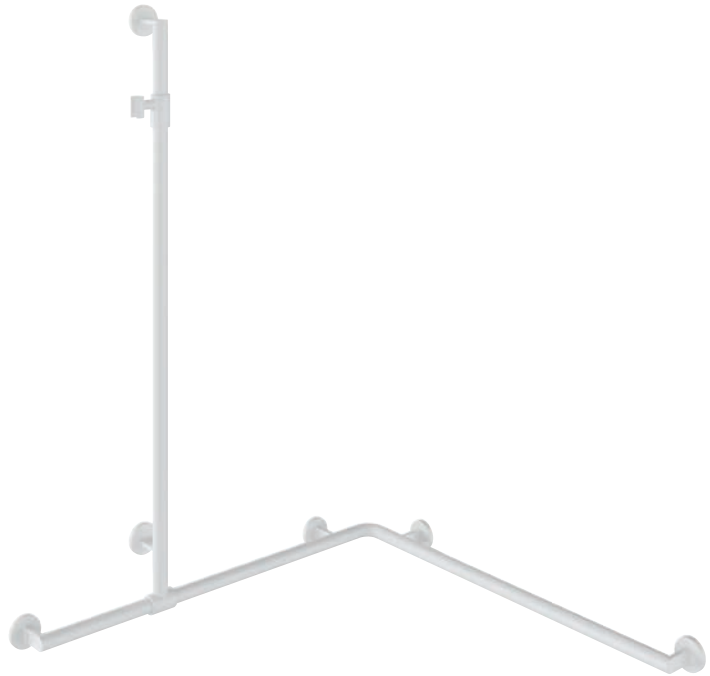

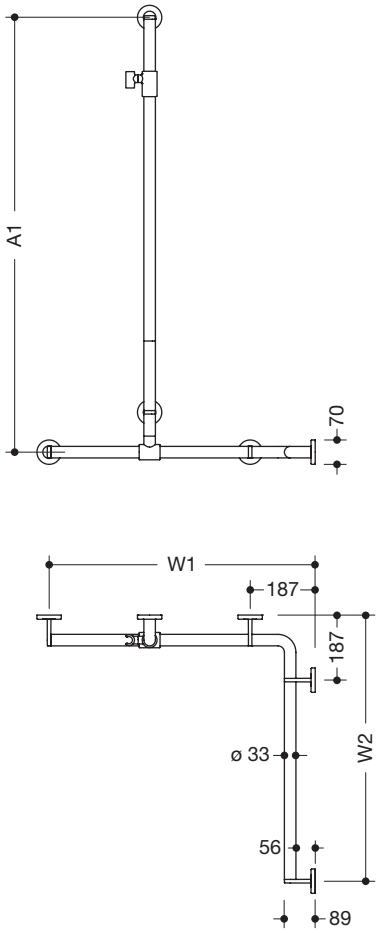

HEWI Rail with sideways adjustable vertical support bar and shower head holder

· reduced number of fixing roses thanks to a mitre cut in the corner
· automatic shower head: The shower head holder can be moved smoothly, automatic locking, simple and intuitive one-hand operation
· wear-free clamping mechanism
· conical holder on the shower holder can be adjusted to any angle
· with sideways adjustable vertical rail with shower head holder
· can be mounted in left hand or right hand position
· rails ø 33 mm, 89 mm deep, roses ø 70 mm
· clearance to the wall 56 mm
· with continuous corrosion resistant steel core
· made of high-quality polyamide in selected HEWI colours (premium colours at an additional cost)
· including non-corrosive and tested HEWI fixing material for wall mounting, as well as sealing tape to seal the drill holes
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg

700.35.00500	A1 = 1250 mm, W1/W2 = 762 mm
700.35.00600	A1 = 1250 mm, W1/W2 = 962 mm
700.35.00700	A1 = 1250 mm, W1 = 1185 mm, W2 = 762 mm
700.35.0S300	A1 = 600 - 1250 mm, W1/W2 = 475 - 1800 mm**

**Please advise A1, W1 and W2 when ordering.
For horizontal lengths of 1000 mm or more, an additional support is required, as the maximum support spacing is 850 mm.

8 HEWI colours


98 99 97 95 92 90 43* 77*

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

Item Number

Dimensions in mm / Specification



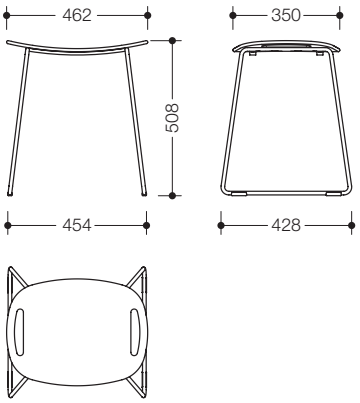


700.51.30060


HEWI Shower stool

· mobile, light, showerproof stool
· spacious, pleasantly warm seat made of high-quality synthetic material, slightly textured
· spacious, pleasantly warm seat made of high-quality synthetic material, slightly textured
· with integrated handle recesses for easy sitting down and standing up
· weight: 5,2 kg
· 508 mm high, 462 mm wide, seat 462 mm wide
· frame powder-coated in selected HEWI colours (premium colours at an additional cost)
· matt synthetic material seat in the same colour as the frame
· with anti-slip foot caps
· tested up to 200 kg
· recommended maximum weight of the user: 150 kg



Drill hole



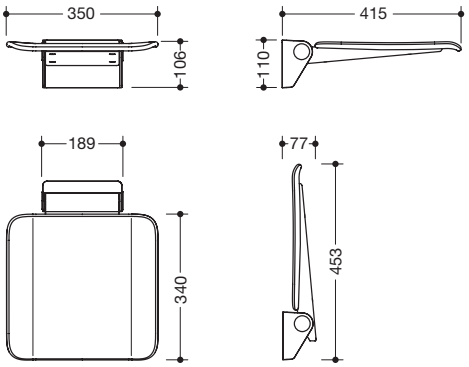



700.51.20060


HEWI Hinged seat


· consists of a wall bracket and a continuous seat
· wall bracket made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
· slip-resistant, structured seat made of matt synthetic material in colour of the wall bracket
· seat can be folded up to save space
· seat depth when folded up 77 mm
· 350 mm wide, 415 mm deep and 110 mm high
· seat 350 mm wide and 340 mm deep
· for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape and sealing rods for sealing the mounting points according to DIN 18534 are included in the delivery
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg



Item Number	Dimensions in mm / Specification

Drill hole



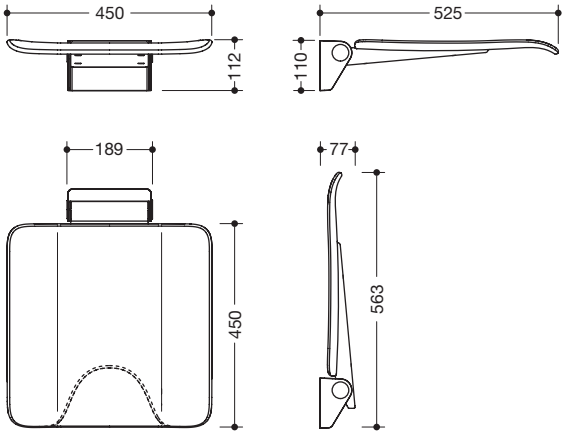



700.51.20260

HEWI Hinged seat
· consists of a wall bracket and a continuous seat
· wall bracket made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
· slip-resistant, structured seat made of matt synthetic material in colour of the wall bracket
· seat can be folded up to save space
· seat depth when folded up 77 mm
· 450 mm wide, 525 mm deep and 112 mm high
· seat 450 mm wide and 450 mm deep
· for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape and sealing rods for sealing the mounting points according to DIN 18534 are included in the delivery
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg
· fulfils the requirements acc. to DIN 18040, ÖNORM B1600/1601 and SIA 500



700.51.20460

with hygiene cutout

Fixing material to be ordered separately see page 49
for fixing on walls made of:


BM17.2	concrete > C20/C25, national technical approval number: ETA-11/0493
BM10.2	concrete > C20/C25
BM11.2	autoclaved aerated concrete (> P2)
BM12.2	lightweight walls with rear lining made of laminated timber boards ...
BM13.2	lightweight walls with integrated steel plates ...
BM18.2	hollow concrete block, vertically perforated bricks, solid bricks,..., national technical approval number: ETA-13/1036


HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

Item Number	Dimensions in mm / Specification

Drill hole



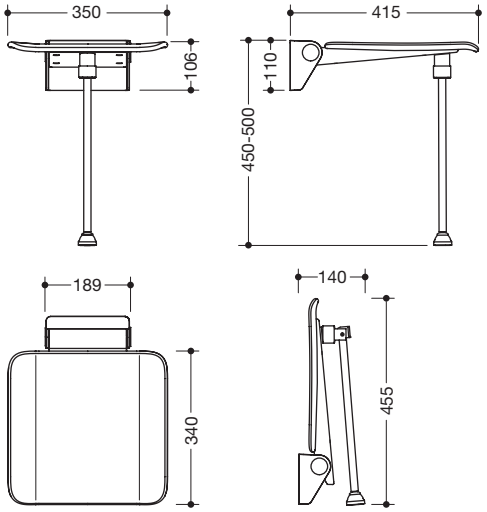



700.51.20160

HEWI Hinged seat with floor suppert
- consists of a wall bracket and a continuous seat
- wall bracket made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat made of matt synthetic material in colour of the wall bracket
- seat can be folded up to save space
- seat depth when folded up 77 mm
- with floor support for seat height 450-500 mm, powder-coated in colour of seat
- 350 mm wide, 415 mm deep and 110 mm high
- seat 350 mm wide and 340 mm deep
- for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
- sealing tape and sealing rods for sealing the mounting points according to DIN 18534 are included in the delivery
- tested up to 200 kg when used with HEWI fixing material
- recommended maximum weight of the user: 150 kg




Fixing material to be ordered separately see page 49
for fixing on walls made of:


BM17.2	concrete > C20/C25, national technical approval number: ETA-11/0493
BM10.2	concrete > C20/C25
BM11.2	autoclaved aerated concrete (> P2)
BM12.2	lightweight walls with rear lining made of laminated timber boards ...
BM13.2	lightweight walls with integrated steel plates ...
BM18.2	hollow concrete block, vertically perforated bricks, solid bricks,..., national technical approval number: ETA-13/1036

Item Number

Dimensions in mm / Specification

Drill hole



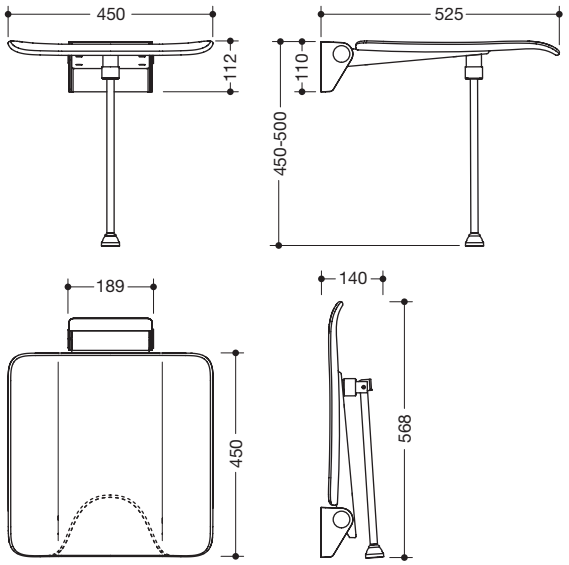



700.51.20560

HEWI Hinged seat with floor suppert

· consists of a wall bracket and a continuous seat
· wall bracket made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
· slip-resistant, structured seat made of matt synthetic material in colour of the wall bracket
· seat can be folded up to save space
· seat depth when folded up 77 mm
· with floor support for seat height 450-500 mm, powder-coated in colour of seat
· 450 mm wide, 525 mm deep and 112 mm high
· seat 450 mm wide and 450 mm deep
· for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape and sealing rods for sealing the mounting points according to DIN 18534 are included in the delivery
· tested up to 200 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg
· fulfils the requirements acc. to DIN 18040, ÖNORM B1600/1601 and SIA 500



700.51.21460

with hygiene cutout




HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

Item Number	Dimensions in mm / Specification



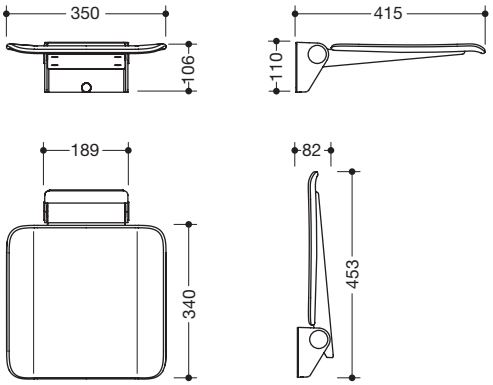

700.51.40060

HEWI Mobiler hinged seat
- consists of a wall bracket and a continuous seat
- wall bracket made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat made of matt synthetic material in colour of the wall bracket
- seat can be folded up to save space
- seat depth when folded up 77 mm
- for mobile use
- for easy and flexible retrofitting on pre-assembled HEWI mounting plate: 700.51.00160 (to be ordered separately)
- tool-free and quick installation by means of simple hanging of the seat
- secured by fixing screw
- 350 mm wide, 415 mm deep and 112 mm high
- seat 350 mm wide and 340 mm deep
- for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
- sealing tape and sealing rods for sealing the mounting points according to DIN 18534 are included in the delivery
- tested up to 200 kg when used with HEWI fixing material
- recommended maximum weight of the user: 150 kg




Fixing material to be ordered separately see page 49
for fixing on walls made of:

BM17.2	concrete > C20/C25, national technical approval number: ETA-11/0493
BM10.2	concrete > C20/C25
BM11.2	autoclaved aerated concrete (> P2)
BM12.2	lightweight walls with rear lining made of laminated timber boards ...
BM13.2	lightweight walls with integrated steel plates ...
BM18.2	hollow concrete block, vertically perforated bricks, solid bricks,..., national technical approval number: ETA-13/1036

Item Number	Dimensions in mm / Specification



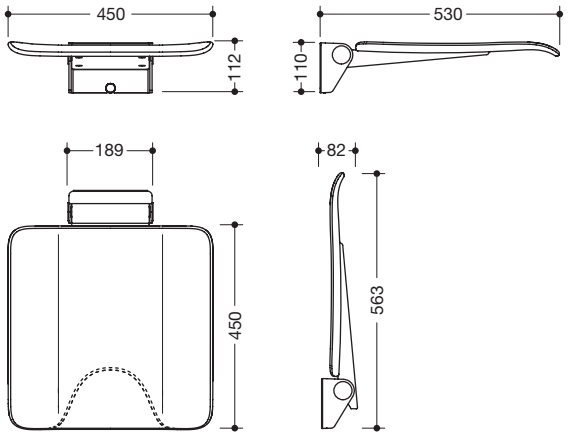

700.51.40160

HEWI Mobile hinged seat
- consists of a wall bracket and a continuous seat
- wall bracket made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat made of matt synthetic material in colour of the wall bracket
- seat can be folded up to save space
- seat depth when folded up 77 mm
- for mobile use
- for easy and flexible retrofitting on pre-assembled HEWI mounting plate: 700.51.00160 (to be ordered separately)
- tool-free and quick installation by means of simple hanging of the seat
- secured by fixing screw
- 450 mm wide, 530 mm deep and 112 mm high
- seat 450 mm wide and 450 mm deep
- for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
- sealing tape and sealing rods for sealing the mounting points according to DIN 18534 are included in the delivery
- tested up to 200 kg when used with HEWI fixing material
- recommended maximum weight of the user: 150 kg
- fulfils the requirements acc. to DIN 18040, ÖNORM B1600/1601 and SIA 500

700.51.40460

with hygiene cutout




HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

Item Number	Dimensions in mm / Specification



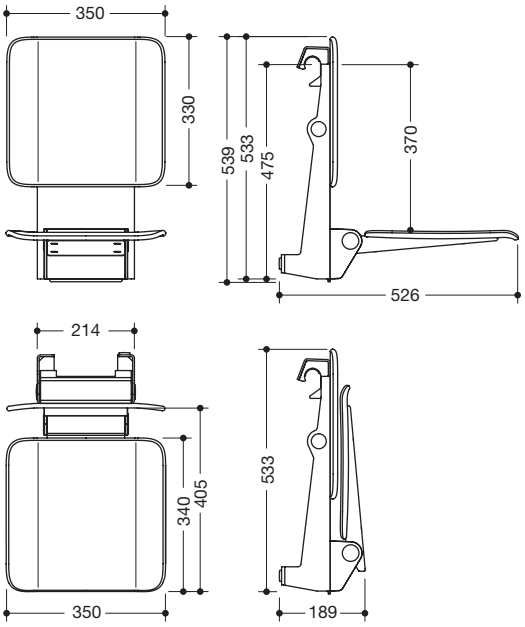


700.51.10060

HEWI Removable hanging seat
- assembly comprising seat, backrest and mounting bracket
- suspension device made of metal, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat and backrest made of matt synthetic material in the same colour as the mounting bracket
- seat can be folded up to save space
- for hanging in HEWI shower grab rails and support rails ø 30, 32 and 33 mm
- 350 mm wide, 526 mm deep and 533 mm high
- seat 350 mm wide and 340 mm deep
- product weight: 8,0 kg
- tested up to 200 kg
- recommended maximum weight of the user: 150 kg

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

Item Number | Dimensions in mm / Specification



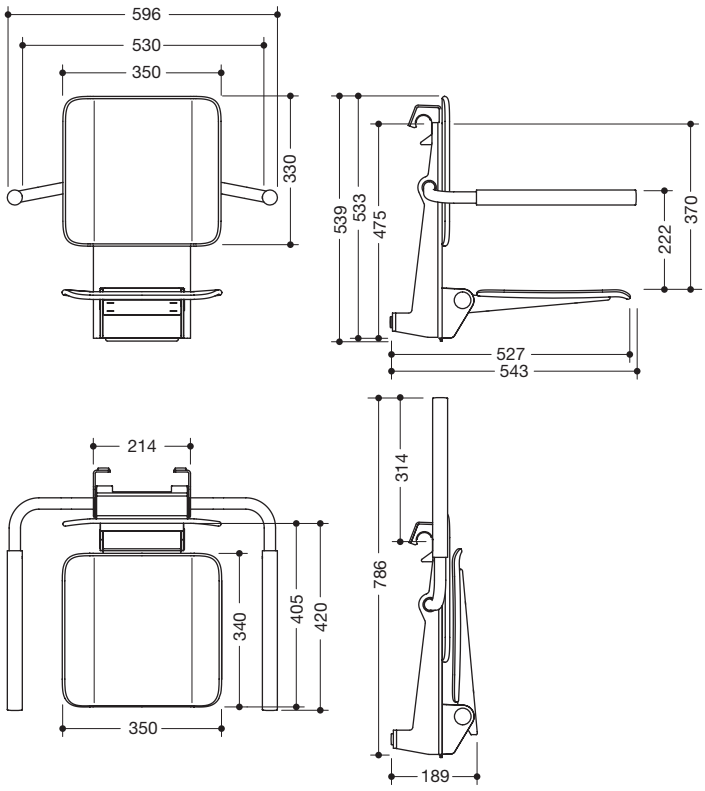

700.51.10160

HEWI Removable hanging seat with armrests

- assembly comprising seat, backrest, armrests and mounting bracket
- suspension device made of metal, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat and backrest made of matt synthetic material in the same colour as the mounting bracket
- seat can be folded up to save space
- armrests made of matt synthetic material in the same colour as the suspension device
- armrests can be folded up and down separately
- for hanging in HEWI shower grab rails and support rails ø 30, 32 and 33 mm
- 596 mm wide, 543 mm deep and 533 mm high
- seat 350 mm wide and 340 mm deep
- product weight: 11,9 kg
- tested up to 200 kg
- recommended maximum weight of the user: 150 kg


When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

	Item Number	Dimensions in mm / Specification



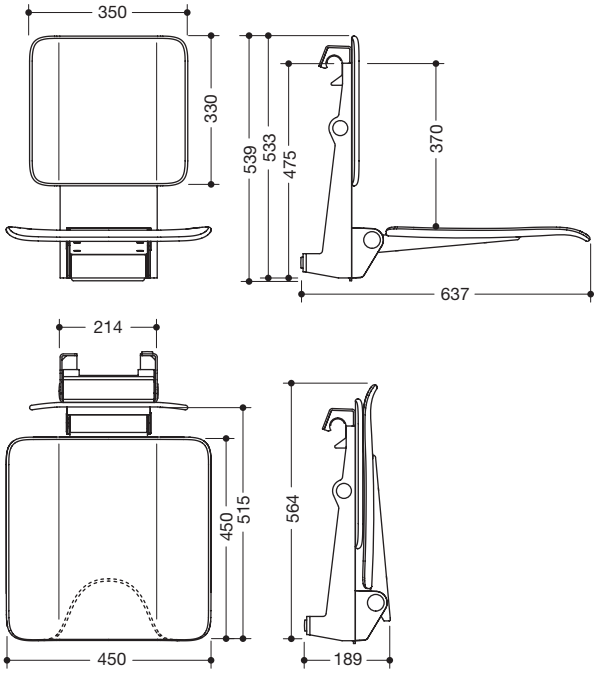



700.51.10260

HEWI Removable hanging seat
- assembly comprising seat, abackrest and mounting bracket
- suspension device made of metal, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat and backrest made of matt synthetic material in the same colour as the mounting bracket
- seat can be folded up to save space
- for hanging in HEWI shower grab rails and support rails ø 30, 32 and 33 mm
- 450 mm wide, 637 mm deep and 533 mm high
- seat 450 mm wide and 450 mm deep
- product weight: 8,8 kg
- fulfils the requirements acc. to DIN 18040 and ÖNORM B1600/1601
- tested up to 200 kg
- recommended maximum weight of the user: 150 kg


700.51.10460

with hygiene cutout

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

Item Number | Dimensions in mm / Specification



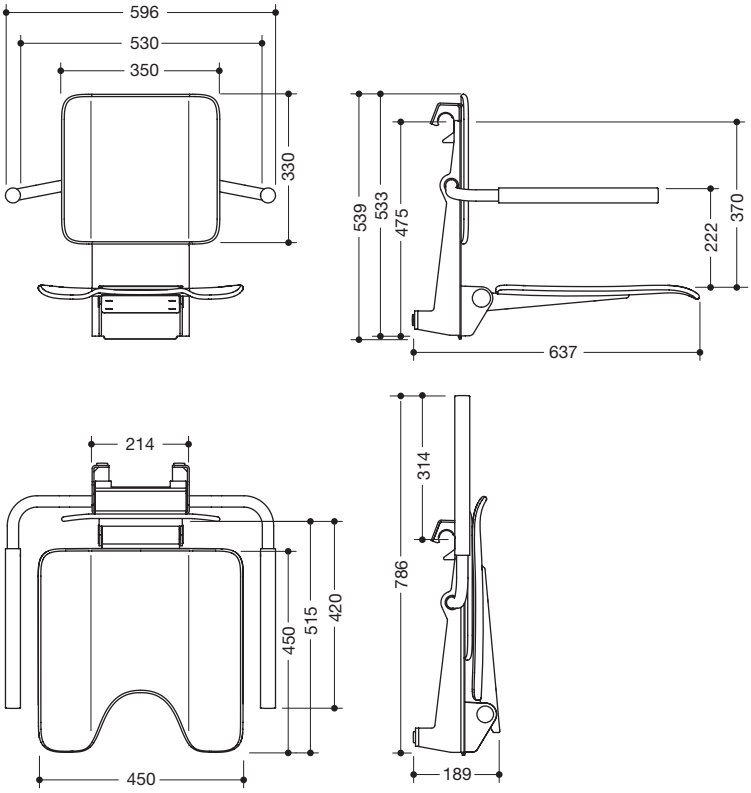



700.51.10360

HEWI Removable hanging seat
- assembly comprising seat, backrest, armrests and mounting bracket
- suspension device made of metal, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat and backrest made of matt synthetic material in the same colour as the mounting bracket
- seat can be folded up to save space
- armrests made of matt synthetic material in the same colour as the suspension device
- armrests can be folded up and down separately
- for hanging in HEWI shower grab rails and support rails ø 30, 32 and 33 mm
- 596 mm wide, 637 mm deep and 533 mm high
- seat 450 mm wide and 450 mm deep
- product weight: 12,7 kg
- fulfils the requirements acc. to DIN 18040 and ÖNORM B1600/1601
- tested up to 200 kg
- recommended maximum weight of the user: 150 kg

700.51.10560

with hygiene cutout


When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

Item Number | Dimensions in mm / Specification



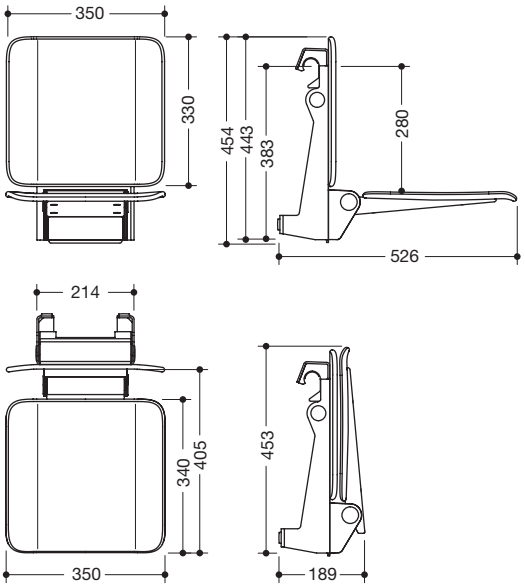

700.51.10660


HEWI Removable hanging seat
especially for France and Switzerland

- assembly comprising seat, backrest and mounting bracket
- suspension device made of metal, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat and backrest made of matt synthetic material in the same colour as the mounting bracket
- seat can be folded up to save space
- for hanging in HEWI shower grab rails and support rails ø 30, 32 and 33 mm
- 350 mm wide, 526 mm deep and 443 mm high
- seat 350 mm wide and 340 mm deep
- product weight: 7,7 kg
- tested up to 200 kg
- recommended maximum weight of the user: 150 kg

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

Item Number | Dimensions in mm / Specification



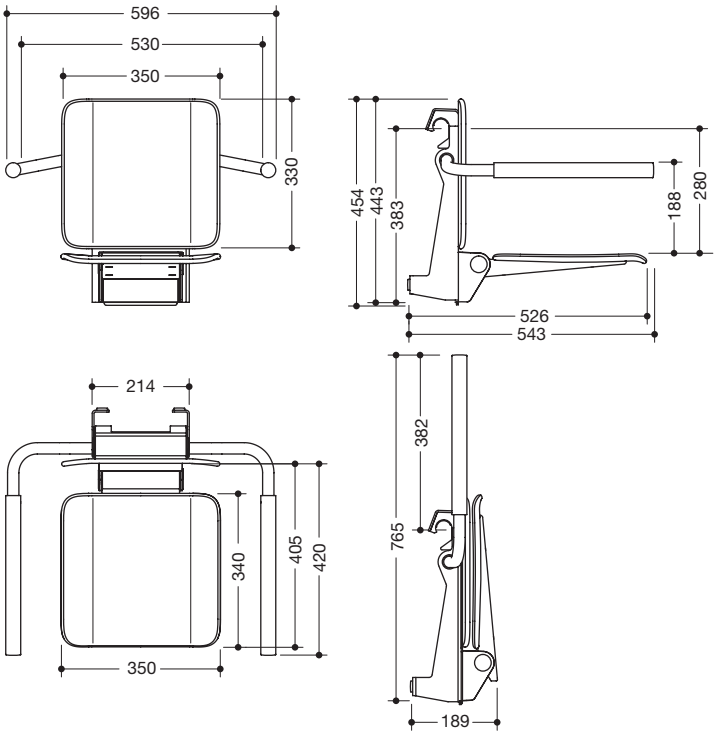

700.51.10760

HEWI Removable hanging seat
especially for France and Switzerland

- assembly comprising seat, backrest, armrests and mounting bracket
- suspension device made of metal, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat and backrest made of matt synthetic material in the same colour as the mounting bracket
- seat can be folded up to save space
- armrests made of matt synthetic material in the same colour as the suspension device
- armrests can be folded up and down separately
- for hanging in HEWI shower grab rails and support rails ø 30, 32 and 33 mm
- 596 mm wide, 543 mm deep and 443 mm high
- seat 350 mm wide and 340 mm deep
- product weight: 11,6 kg
- tested up to 200 kg
- recommended maximum weight of the user: 150 kg


When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

Item Number	Dimensions in mm / Specification



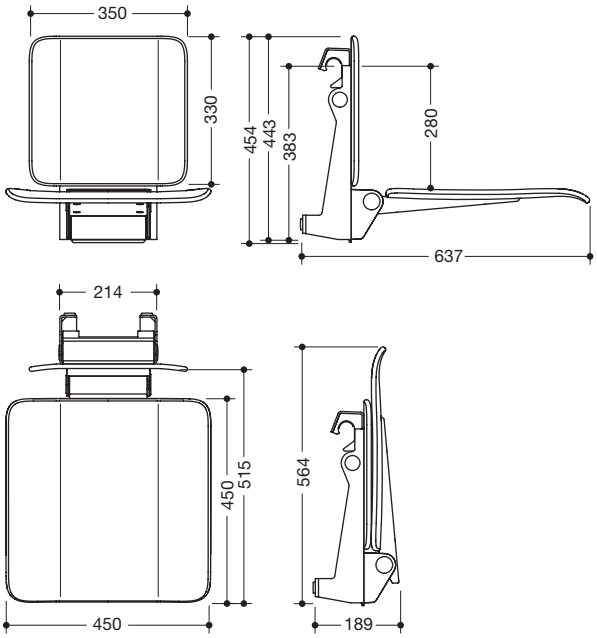



700.51.10860

HEWI Removable hanging seat
especially for France and Switzerland
- assembly comprising seat, backrest and mounting bracket
- suspension device made of metal, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat and backrest made of matt synthetic material in the same colour as the mounting bracket
- seat can be folded up to save space
- for hanging in HEWI shower grab rails and support rails ø 30, 32 and 33 mm
- 450 mm wide, 637 mm deep and 443 mm high
- seat 450 mm wide and 450 mm deep
- product weight: 8,5 kg
- fulfils the requirements acc. to SIA 500
- tested up to 200 kg
- recommended maximum weight of the user: 150 kg


700.51.11060

with hygiene cutout

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

Item Number | Dimensions in mm / Specification



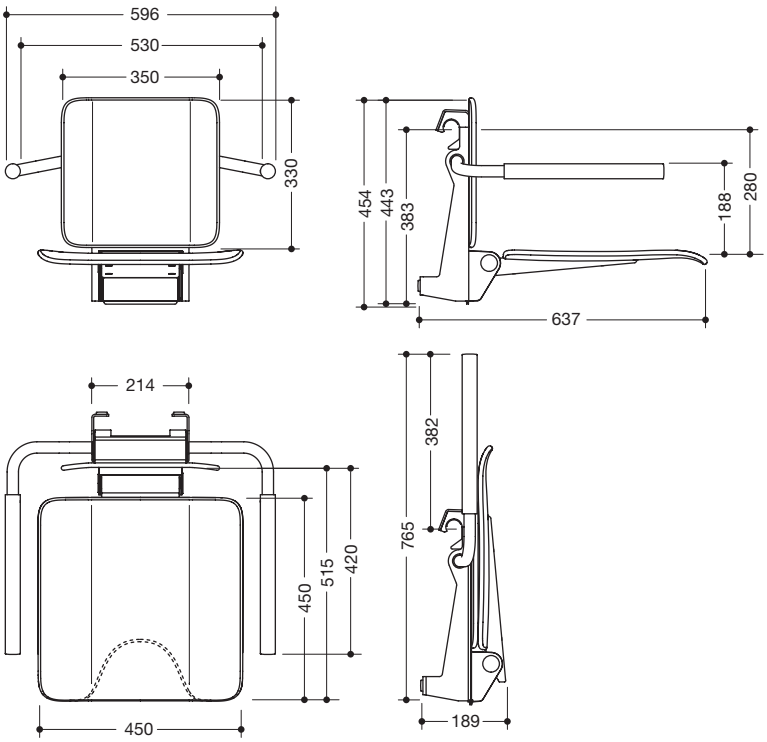



700.51.10960

HEWI Removable hanging seat
especially for France and Switzerland

- assembly comprising seat, backrest, armrests and mounting bracket
- suspension device made of metal, powder-coated in selected HEWI colours (premium colours at an additional cost)
- slip-resistant, structured seat and backrest made of matt synthetic material in the same colour as the mounting bracket
- seat can be folded up to save space
- armrests made of matt synthetic material in the same colour as the suspension device
- armrests can be folded up and down separately
- for hanging in HEWI shower grab rails and support rails ø 30, 32 and 33 mm
- 596 mm wide, 637 mm deep and 443 mm high
- seat 450 mm wide and 450 mm deep
- product weight: 12,4 kg
- fulfils the requirements acc. to SIA 500
- tested up to 200 kg
- recommended maximum weight of the user: 150 kg

700.51.11160

with hygiene cutout


When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

	Item Number	Dimensions in mm / Specification






700.51.00160

HEWI Mounting plate for mobile hinged seats
· rectangular mounting plate with knurled screw
· to hold and fix the mobile hinged seats 700.51.4...
· 163 mm wide, 109 mm high, 15,6 mm deep
· made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
· for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape and sealing rods for sealing the mounting points according to DIN 18534 are included in the delivery


---



700.51.00260

HEWI Cover for mounting plate for mobile hinged seats
· for cover of the mounting plate by simple replacement
· 163 mm wide, 109 mm high, 13 mm deep
· face plate made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
· frame cover made of polyamide in colour of front plate












700.51.00360







HEWI Mounting plate with cover for mobile hinged seats
· rectangular mounting plate with suitable, rectangular cover
· to hold and fix the mobile hinged seats 700.51.4...
· 163 mm wide, 109 mm high, 18 mm deep
· mounting plate made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
· front plate of cover made of high-quality stainless steel, powder-coated in selected HEWI colours (premium colours at an additional cost)
· frame of cover made of polyamide in colour of front plate
· for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
· sealing tape and sealing rods for sealing the mounting points according to DIN 18534 are included in the delivery

---

HEWI Powder-coated surfaces

- **... KM** signal white
- **... EL** pure white
- **... MH** light grey
- **... YM** stone grey
- **... DZ** anthracite grey
- **... PX** jet black
- **... PF** blackberry*
- **... UG** matcha green*

Fixing type for:	**Hinged support rails 700, 805 C** **Hinged seats 700**
For fixing on walls made of:	
 concrete > C20/C25 **National technical approval number: ETA-11/0493**	**BM17.2** **Supplied with** 2 stainless steel screws M 10 x 30 2 internal thread sleeves M 10 x 110 **additionally** injection mortar (HEWI item No.: 200311) **or to be provided on site** injection mortar HIT-HY200A (Hilti) extrusion tool HDM (Hilti)
 concrete > C20/C25	**BM10.2** **Supplied with** 2 stainless steel countersunk screws ø 10 x 95 2 plugs HILTI HUD 14 x 70
 autoclaved aerated concrete (> P2)	**BM11.2** **Supplied with** 2 stainless steel screws M10 x 30 2 mesh sleeves HIT-SC 22 x 85 2 internal thread sleeves HIT-IC **additionally** injection mortar (HEWI item No.: 200266) **or to be provided on site** injection mortar HIT-HY 270 extrusion tool HDM (Hilti) standard undercut drill 22/100
 lightweight walls with rear lining made of laminated timber boards (with waterproof bonding, at least 30 mm thick required, e.g. studs or pre wall installation)	**BM12.2** **Supplied with** 2 stainless steel countersunk screws ø 10 x 95
 lightweight walls with integrated steel plates (e.g. studs or pre wall installation)	**BM13.2** **Supplied with** 2 stainless steel screws M10 x 60
  **with mesh sleeve ø 18 mm** · hollow lightweight concrete block · vertically perforated bricks · hollow lightweight concrete block · lightweight aggregate concrete with open structure **National technical approval number: ETA-13/1036** **without mesh sleeve** · hollow concrete block · vertically perforated bricks	**BM18.2** **Supplied with** 2 stainless steel screws M10 x 30 2 mesh sleeves HIT-SC 18 x 85 2 internal thread sleeves HIT-IC **additionally** injection mortar (HEWI item No.: 200266) **or to be provided on site** injection mortar HIT-HY 270 extrusion tool HDM (Hilti)

Fixing type for: **For fixing on walls made of:**	**Backrest rails 801/805 Classic both sides**	**Backrest rails 801/805 Classic one-sided**
 concrete > C20/C25 **National technical approval number: ETA-11/0493**	**BM10.2.1** **For fixing on stationary and hinged support rails 801/805 Classic with fixing BM10.2, BM17.2** **Supplied with**** 2 stainless steel special screws ø 10 x 95 2 centring sleeves ø 20 / ø 11 x 11,5 2 plugs HILTI HUD 14 x 70	**BM10.2.2** **For fixing on stationary and hinged support rails 801/805 Classic with fixing BM10.2, BM17.2** **Supplied with**** 1 stainless steel special screws ø 10 x 95 1 centring sleeves ø 20 / ø 11 x 11,5 1 plugs HILTI HUD 14 x 70
 **with mesh sleeve ø 18 mm** · hollow lightweight concrete block · vertically perforated bricks · hollow lightweight concrete block · lightweight aggregate concrete with open structure **without mesh sleeve** · hollow concrete block · vertically perforated bricks  **with mesh sleeve ø 22 mm** · autoclaved aerated concrete (> P2) 	**BM11.2.1** **For fixing on stationary and hinged support rails 801/805 Classic with fixing BM11.2, BM18.2** **Supplied with**** 2 stainless steel special screws M10 x 30 2 centring sleeves ø 20 / ø 11 x 11,5	**BM11.2.2** **For fixing on stationary and hinged support rails 801/805 Classic with fixing BM11.2, BM18.2** **Supplied with**** 1 stainless steel special screws M10 x 30 1 centring sleeves ø 20 / ø 11 x 11,5
 lightweight walls with rear lining made of laminated timber boards (with waterproof bonding, at least 30 mm thick required, e.g. studs or pre wall installation)	**BM12.2.1** **For fixing on stationary and hinged support rails 801/805 Classic with fixing BM12.2** **Supplied with**** 2 stainless steel special screws ø 10 x 95 2 centring sleeves ø 20 / ø 11 x 11,5	**BM12.2.2** **For fixing on stationary and hinged support rails 801/805 Classic with fixing BM12.2** **Supplied with**** 1 stainless steel special screws ø 10 x 95 1 centring sleeves ø 20 / ø 11 x 11,5
 lightweight walls with integrated steel plates (e.g. studs or pre wall installation)	**BM13.2.1** **For fixing on stationary and hinged support rails 801/805 Classic with fixing BM13.2** **Supplied with**** 2 stainless steel special screws M10 x 60 2 centring sleeves ø 20 / ø 11 x 11,5	**BM13.2.2** **For fixing on stationary and hinged support rails 801/805 Classic with fixing BM13.2** **Supplied with**** 1 stainless steel special screws M10 x 60 1 centring sleeves ø 20 / ø 11 x 11,5


****Please note:**
Scope of delivery includes only fixing material for backrest rail.
Fixing material for hinged support rails to be ordered separately.

Dispenser products for flush-mounting | Wall nices



Item Number	Dimensions in mm / Specification



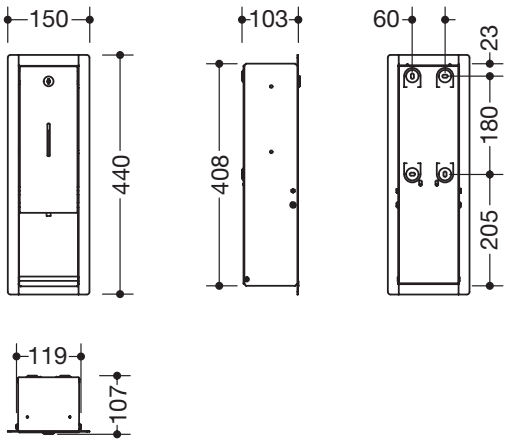

HEWI SENSORIC Soap dispenser
· for flush-mounting, Flat wall construction of the projecting frame
· front level indicator
· serves to hold commercially available liquid soap
· with inner container for free filling, Filling quantity 500 ml
· inner container can be removed for cleaning
· suitable for liquid soap with a viscosity of 1 to 3,000 mPa-s
· contactless output
· illumination of the output area when the sensor is activated (blue light)
· maintenance-free
· enclosed sticker for labelling the dispenser (if required to differentiate between soap, foam soap and disinfectant dispensers)
· with battery change indicator
· batteries (AA 1.5 V x 4) not included in the delivery
· with locking device as protection against misuse
· 150 mm wide, 440 mm high and 103 mm deep
· including non-corrosive HEWI fixing material

900.06.020XA · made of high-quality stainless steel, satin finished
900.06.02060 · made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)

HEWI SENSORIC Disinfectant dispenser
· do., to be filled with standard disinfectant
· disinfectant is dispensed as a spray


HEWI SENSORIC

900.06.021XA · made of high-quality stainless steel, satin finished
900.06.02160 · made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)

Item Number

Dimensions in mm / Specification



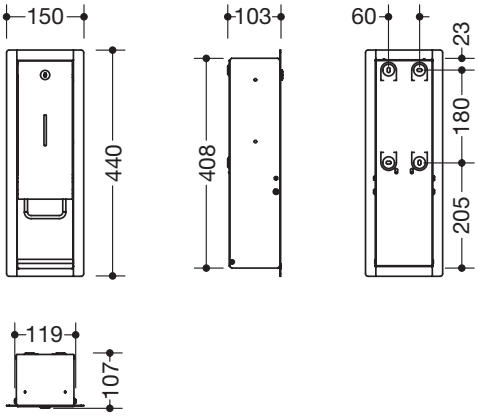


HEWI Soap dispenser
· for flush-mounting, flat wall construction of the projecting frame
· front level indicator
· serves to hold commercially available liquid soap
· with inner container for free filling, filling quantity 600 ml
· inner container can be removed for cleaning
· suitable for liquid soap with a viscosity of 1,500 to 4,000 mPa-s
· with locking device as protection against misuse
· 150 mm wide, 440 mm high and 103 mm deep
· including non-corrosive HEWI fixing material

900.06.019XA
· made of high-quality stainless steel, satin finished

900.06.01960
· made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)

◪ □ ■



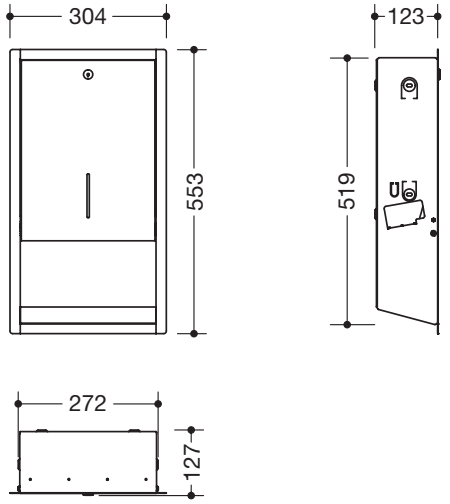

HEWI Paper towel dispenser
· for flush-mounting, flat structure of the protruding frame
· holds standard paper towels with various folds in widths of 235 - 250 mm and folded length / depth of 80 - 110 mm (HEWI recommends paper towels with Z-fold)
· capacity approx. 300 - 450 paper towels
· front level indicator
· with locking device as protection against misuse
· 304 mm wide, 553 mm high and 123 mm deep
· including non-corrosive HEWI fixing material

900.06.018XA
· made of high-quality stainless steel, satin finished

900.06.01860
· made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)

◪ □ ■


HEWI surfaces

◪ XA □ **...60 DX** matt white
■ **...60 DC** matt black

Item Number

Dimensions in mm / Specification



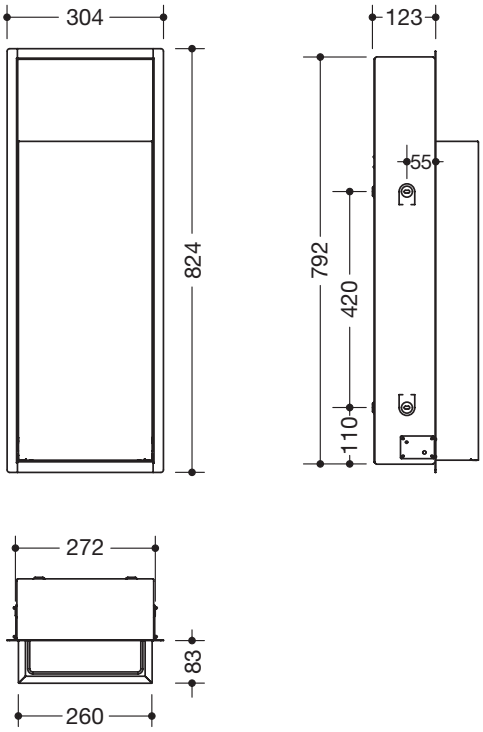

HEWI Wastepaper bin
· for flush-mounting
· flat wall construction of the projecting frame
· the wastebin protrudes slightly into the room
· capacity approx. 30 l
· integrated bag holder with pull-out function for easier bag insertion and removal
· container is removable, inhibited by magnets
· 304 mm wide, 824 mm high and 206 mm deep
· including non-corrosive HEWI fixing material

900.05.007XA
· made of high-quality stainless steel, satin finished

900.05.00760
· made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)

▨ □ ■


HEWI surfaces

▨ □ **...60 DX** matt white
XA ■ **...60 DC** matt black

Item Number

Dimensions in mm / Specification



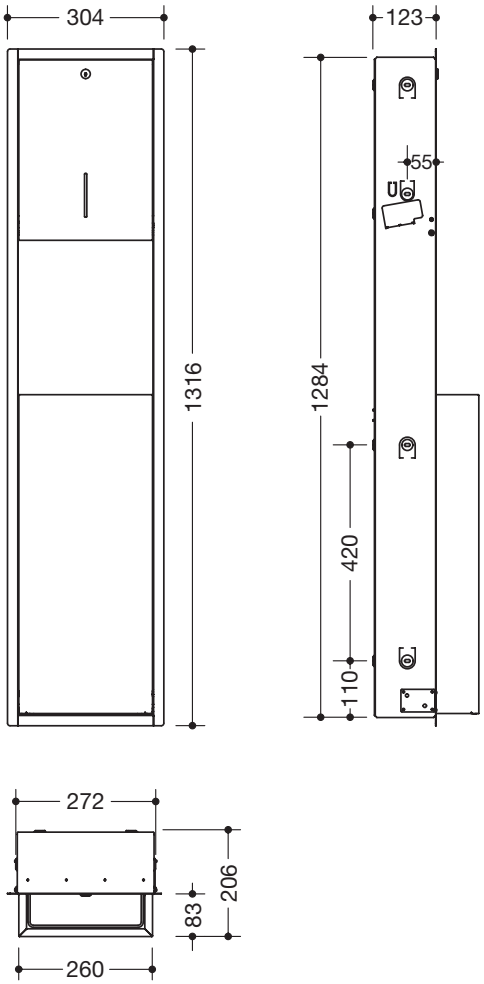

HEWI Paper towel dispenser/wastepaper bin combination

· combination of paper towel dispenser and wastebin for wall installation
· flat wall construction of the projecting frame
· the towel dispenser is integrated into the wall
· the wastebin protrudes slightly into the room
· capacity of the wastebin approx. 30 litres
· integrated bag holder with pull-out function for easier bag insertion and removal
· container is removable, Inhibited by magnets
· holds standard paper towels with various folds in widths of 235 - 250 mm and folded length / depth of 80 - 110 mm (HEWI recommends paper towels with Z-fold)
· capacity approx. 300 - 450 paper towels
· front level indicator
· 304 mm wide, 1316 mm high and 206 mm deep
· with locking device as protection against misuse
· including non-corrosive HEWI fixing material

900.05.008XA
· made of high-quality stainless steel, satin finished

900.05.00860
· made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)


▨ □ ■


HEWI surfaces

▨ XA □ **...60 DX** matt white
■ **...60 DC** matt black

Item Number

Dimensions in mm / Specification



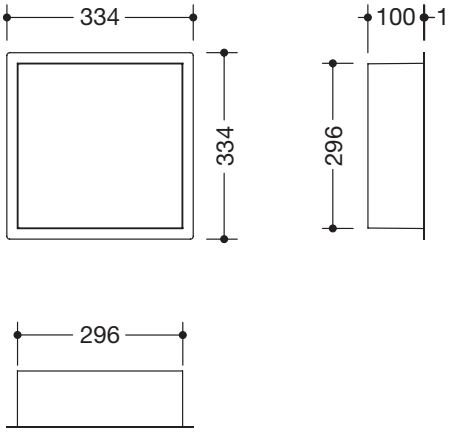


available from December 2026

900.03.00560

HEWI Wall nice 300 x 300 mm
· for flush-mounting
· flat wall construction of the projecting frame, which covers the edge of the wall opening
· space saving alternative to a shower basket
· 334 mm wide, 334 mm high and 101 mm deep
· area of application: New builds and refurbishments involving showers, washbasins and baths
· suitable for solid and drywall construction
· particularly suitable for use in wet areas
· made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white), DC (matt black)
· optional sealing kit to be ordered separately: 900.03.009
· on site sealing in accordance with DIN 18534 is required



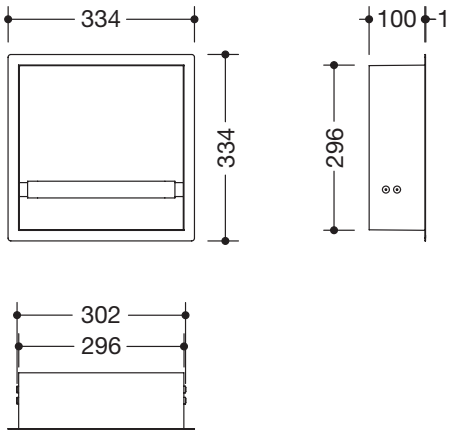

available from December 2026

900.03.00660


HEWI Wall nice 300 x 300 mm with support rail
· for flush-mounting
· flat wall construction of the projecting frame, which covers the edge of the wall opening
· space saving alternative to a shower basket
· 334 mm wide, 334 mm high and 101 mm deep
· area of application: New builds and refurbishments involving showers, washbasins and baths
· suitable for solid and drywall construction
· particularly suitable for use in wet areas
· made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white), DC (matt black)
· including non-corrosive HEWI fixing material and screw sealing
· optional sealing kit to be ordered separately: 900.03.009
· on site sealing in accordance with DIN 18534 is required

900.03.009
HEWI Sealing kit for wall nice 300 x 300 mm

900.03.010
HEWI Sealing kit for wall nice 450 x 300 mm

Item Number

Dimensions in mm / Specification

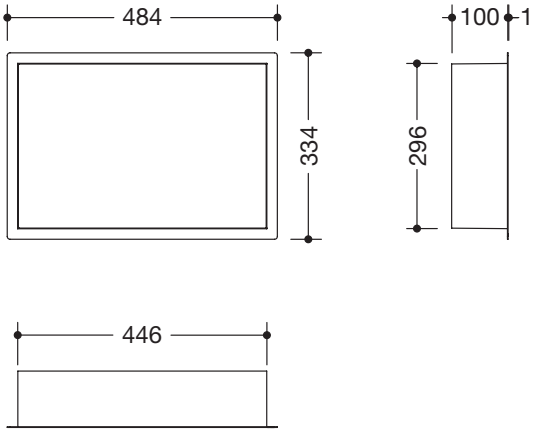


available from December 2026

900.03.00760

HEWI Wall nice 300 x 300 mm
- for flush-mounting
- flat wall construction of the projecting frame, which covers the edge of the wall opening
- space saving alternative to a shower basket
- 384 mm wide, 334 mm high and 101 mm deep
- area of application: New builds and refurbishments involving showers, washbasins and baths
- suitable for solid and drywall construction
- particularly suitable for use in wet areas
- made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white), DC (matt black)
- optional sealing kit to be ordered separately: 900.03.010
- on site sealing in accordance with DIN 18534 is required

□ ■



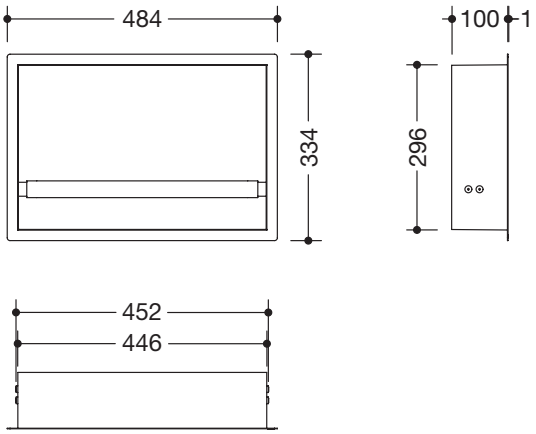

available from December 2026

900.03.00860

HEWI Wall nice 300 x 300 mm with support rail
- for flush-mounting
- flat wall construction of the projecting frame, which covers the edge of the wall opening
- space saving alternative to a shower basket
- 384 mm wide, 334 mm high and 101 mm deep
- area of application: New builds and refurbishments involving showers, washbasins and baths
- suitable for solid and drywall construction
- particularly suitable for use in wet areas
- made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white), DC (matt black)
- including non-corrosive HEWI fixing material and screw sealing
- optional sealing kit to be ordered separately: 900.03.010
- on site sealing in accordance with DIN 18534 is required

□ ■

HEWI surfaces

□ **...60 DX** matt white
■ **...60 DC** matt black


Range 805 | Range 805 Classic
Powder-coating



Item Number

Dimensions in mm / Specification



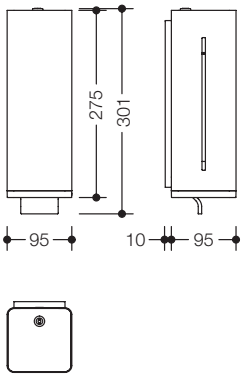


HEWI Soap dispenser, manual
· to be filled with standard liquid soap
· with inner container for free filling, capacity 600 ml
· inner container can be removed for cleaning, side level indicator
· for wall mounting, locking system as protection against misuse
· 95 mm wide, 275 mm high and 105 mm deep
· made of high-quality stainless steel
· not suitable for disinfectant
· including non-corrosive HEWI fixing material

available from February 2027

805.06.10060
· powder-coated in HEWI colour DX (matt white)
· lever and functional end made of mat poyamide in HEWI colour 98 (signal white)

805.06.10160
· powder-coated in HEWI colour DC (matt black)
· lever and functional end made of glossy poyamide in HEWI colour 90 (jet black)







HEWI Foam soap dispenser, manual
· to be filled with standard foam soap
· with inner container for free filling, capacity 1000 ml
· inner container can be removed for cleaning, side level indicator
· for wall mounting, locking system as protection against misuse
· 131 mm wide, 270 mm high, 124 mm deep
· mounting height 35 cm above washbasin
· made of high-quality stainless steel
· including non-corrosive HEWI fixing material


available from February 2027

805.06.15060
· powder-coated in HEWI colour DX (matt white)
· lever and functional end made of mat poyamide in HEWI colour 98 (signal white)

805.06.15160
· powder-coated in HEWI colour DC (matt black)
· lever and functional end made of glossy poyamide in HEWI colour 90 (jet black)

Item Number	Dimensions in mm / Specification



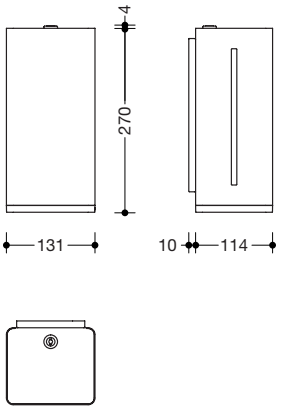

HEWI SENSORIC Soap dispenser
· to be filled with standard liquid soap
· with inner container for free filling, capacity 500 ml
· inner container can be removed for cleaning, side level indicator
· non-contact soap dispensing
· illumination of the output area when the sensor is activated (blue light)
· with battery change indicator
· locking system as protection against misuse, maintenance-free
· 131 mm wide, 270 mm high, 124 mm deep
· made of high-quality stainless steel
· for wall mounting
· including non-corrosive HEWI fixing material
· batteries (AA 1,5 V/4 pcs.) not included in delivery
· suitable for liquid soap with a viscosity of 1 to 3,000 mPa·s

HEWI SENSORIC

available from February 2027

805.06.11560
· powder-coated in HEWI colour DX (matt white)
· functional end made of mat poyamide in HEWI colour 98 (signal white)

805.06.11660
· powder-coated in HEWI colour DC (matt black)
· functional end made of glossy poyamide in HEWI colour 90 (jet black)

HEWI SENSORIC Foam soap dispenser

available from February 2027
· do., to be filled with standard foam soap
· suitable for foam soap with a viscosity of 1 to 5 mPa-s

805.06.15560
· powder-coated in HEWI colour DX (matt white)
· functional end made of mat poyamide in HEWI colour 98 (signal white)

805.06.15660
· powder-coated in HEWI colour DC (matt black)
· functional end made of glossy poyamide in HEWI colour 90 (jet black)

HEWI SENSORIC Disinfectant dispenser

available from February 2027
· do., to be filled with standard disinfectant

805.06.13560
· powder-coated in HEWI colour DX (matt white)
· functional end made of mat poyamide in HEWI colour 98 (signal white)

805.06.13660
· powder-coated in HEWI colour DC (matt black)
· functional end made of glossy poyamide in HEWI colour 90 (jet black)

□ ■

HEWI surfaces
□ **...60 DX** matt white
■ **...60 DC** matt black


900.06.E02 **HEWI Soap tank and soap pump for 805.06.11...**
900.06.E03 **HEWI Soap tank and soap pump for 805.06.13...**
900.06.E04 **HEWI Soap tank and soap pump for 805.06.15560/...15660**
805.06.E04 **HEWI Soap tank and soap pump for 805.06.15060/...15160**

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number

Dimensions in mm / Specification



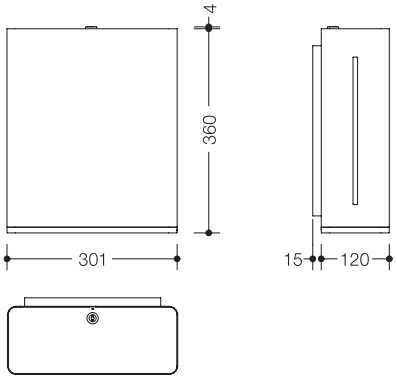


HEWI Paper towel dispenser
· used to hold standard paper towels with different types of folds, 240 - 250 mm
· capacity approx. 300 - 450 paper towels
· side level indicator
· locking system as protection against misuse, for wall mounting
· 301 mm wide, 360 mm high and 135 mm deep
· made of high-quality stainless steel
· including non-corrosive HEWI fixing material

available from February 2027

805.06.50060
· powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)

805.06.50160
· powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)



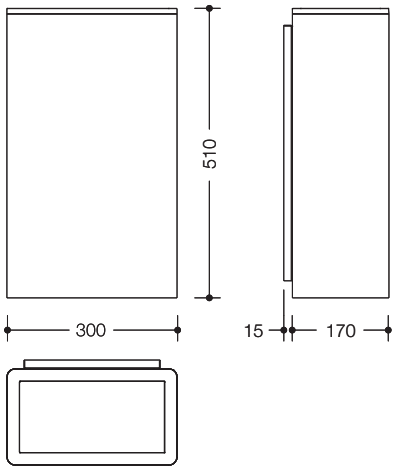

HEWI Waste paper bin
· capacity approx. 25 l
· invisible, integrated bag holder
· 300 mm wide, 510 mm high and 185 mm deep
· for wall mounting
· made of high-quality stainless steel with eingerücktem Wandsockel

available from February 2027

805.05.10060
· powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)



805.05.10160
· powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)


· do., with lid with lifting flap

805.05.11060
· powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)

805.05.11160
· powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)

Item Number	Dimensions in mm / Specification



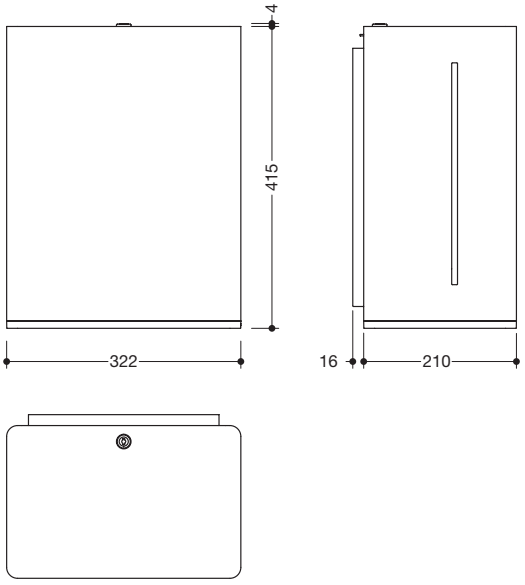

HEWI SENSORIC Paper roll dispenser
· used to hold standard toilet rolls with outer feed, max. roll width 210 mm, max. roll ø 200 mm, tube ø 38 mm
· side level indicator
· easy paper roll replacement
· with battery change indicator
· locking system as protection against misuse
· maintenance-free
· 322 mm wide, 415 mm high, 226 mm deep
· for wall mounting
· made of high-quality stainless steel with eingerücktem Wandsockel
· including non-corrosive HEWI fixing material
· batteries (D-Mono-LR20-1,5V/4 pcs.) not included in delivery
· can be converted to mains connection 950.06.E01

HEWI SENSORIC

available from February 2027

805.06.55560
· non-contact paper dispensing, integrated tear-off edge
· powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)


805.06.55760
· powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)
· automatic paper dispensing at the washbasin after tearing off the paper
· paper length 250 mm

805.06.55660
· powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)

805.06.55860
· powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)

□ ■

CE



950.06.E01


HEWI Power supply
for electronic paper towel dispenser
· 100–240 V, 50/60 Hz, 0,8 A
· 1x plug - type C (CEE 7/16 Euro plug) for Europe, except UK, Ireland
· protection class 2
· cable length 1700 mm


HEWI surfaces
□ **...60 DX** matt white
■ **...60 DC** matt black

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

	Item Number	Dimensions in mm / Specification



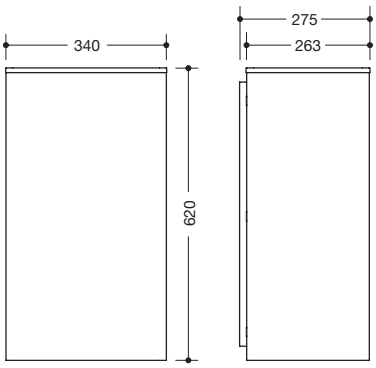




HEWI Waste paper bin
· capacity approx. 60 l, invisible, integrated bag holder
· 340 mm wide, 620 mm high and 275 mm deep, for wall mounting
· container made of high-quality stainless steel
· including non-corrosive HEWI fixing material

available from February 2027

805.05.40060
· powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)

805.05.40160
· powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)



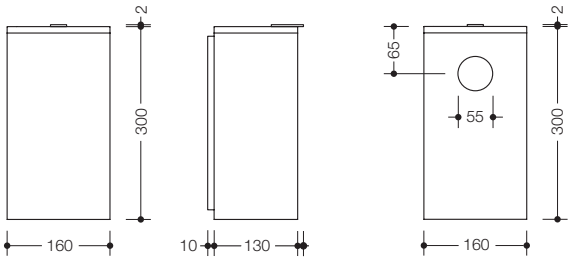



HEWI Hygiene waste bin
· capacity approx. 6 l
· lid with lifting flap, for wall mounting
· 160 mm wide, 300 mm high and 140 mm deep
· container and lid made of high-quality stainless steel
· including non-corrosive HEWI fi xing material

available from February 2027

805.05.20060
· container and lid powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)

805.05.20160
· container and lid powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)



HEWIHygiene combination
· do., with integrated opening for a pack of hygiene bags

available from February 2027


805.05.21060
· container and lid powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)

805.05.21160
· container and lid powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)

Item Number

Dimensions in mm / Specification






available from February 2027

805.21.50060

HEWI Toilet roll holder
· right-angled bend, U-shaped holder with recessed wall base panel
· fixed wall-mounting
· 120 mm wide and 90 mm deep
· made of high-quality satin finished stainless steel strip, 4 mm thick, powder-coated in HEWI colours DX (matt white) or DC (matt black)

□ ■






available from February 2027

805.21.55060

HEWI Toilet roll holder, double
· right-angled bend, U-shaped holder with recessed wall base panel
· fi xed wall-mounting
· 220 mm wide and 90 mm deep
· made of high-quality satin fi nished stainless steel strip, 4 mm thick, powder-coated in HEWI colours DX (matt white) or DC (matt black)

□ ■



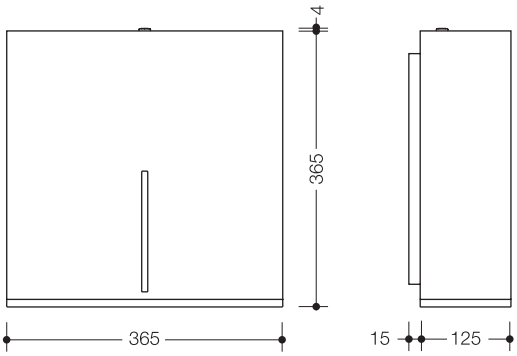

available from February 2027

805.21.60060

805.21.60160

HEWI Large toilet roll holder
· for holding a proprietary large toilet roll with ø 250 – 320 mm
· level indicator
· for wall mounting, locking system as protection against misuse
· 365 mm wide, 365 mm high and 140 mm deep
· made of high-quality stainless steel

· powder-coated in HEWI colour DX (matt white)
· opening made of mat poyamide in HEWI colour 98 (signal white)

· powder-coated in HEWI colour DC (matt black)
· opening made of glossy poyamide in HEWI colour 90 (jet black)

□ ■

HEWI surfaces


□ **...60 DX** matt white
■ **...60 DC** matt black

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number

Dimensions in mm / Specification



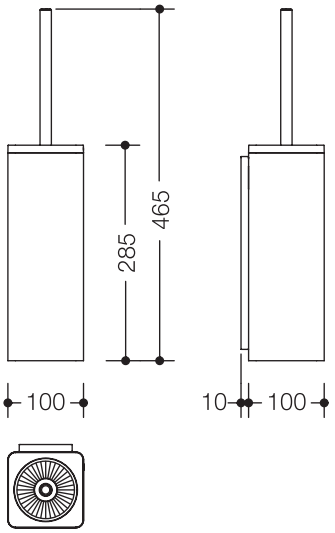



HEWI Toilet brush unit
· insert conical shaped and removable for cleaning
· with inner reservoir for disinfectant
· brush handle made of stainless steel, brush head easily replaceable by bayonet fixing
· 100 mm wide, container 285 mm high and 110 mm deep
· for wall mounting
· made of high-quality stainless s
· including non-corrosive HEWI fixing material

available from February 2027

805.20.20060
· powder-coated in HEWI colour DX (matt white)
· insert made of mat poyamide in HEWI colour 98 (signal white)

805.20.20160
· powder-coated in HEWI colour DC (matt black)
· insert made of glossy poyamide in HEWI colour 90 (jet black)





HEWI Hygiene bag dispenser
· used to hold and remove proprietary hygiene bags made of plastic, max. package size L 130 x B 90 x H 20 mm
· for wall mounting
· 150 mm wide, 92 mm high and 37 mm deep
· made of high-quality stainless steel
· powder-coated in HEWI colours DX (matt white) or DC (matt black)
· including non-corrosive HEWI fixing material


available from February 2027

805.06.70060

Item Number

Dimensions in mm / Specification






available from February 2027

805.90.10060

HEWI Hook
· right-angled bent hook with cubical radii and recessed wall base panel
· 20 mm wide, 36 mm high and 40 mm deep
· made of high-quality stainless steel strip, 3 mm thick, powder-coated in HEWI colours DX (matt white) or DC (matt black)
· including non-corrosive HEWI fixing material

□ ■






available from February 2027

805.90.11060

HEWI Hook
· right-angled bent hook with cubical radii and recessed wall base panel
· 30 mm wide, 60 mm high and 60 mm deep
· made of high-quality stainless steel strip, 3 mm thick, powder-coated in HEWI colours DX (matt white) or DC (matt black)
· including non-corrosive HEWI fixing material

□ ■





available from February 2027

805.90.12060

HEWI Double hook
· right-angled bent hook with cubical radii and recessed wall base panel
· 60 mm wide, 36 mm high and 40 mm deep
· made of high-quality stainless steel strip, 3 mm thick, powder-coated in HEWI colours DX (matt white) or DC (matt black)
· including non-corrosive HEWI fixing material

□ ■


HEWI surfaces

□ **...60 DX** matt white
■ **...60 DC** matt black

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts


Item Number

Dimensions in mm / Specification

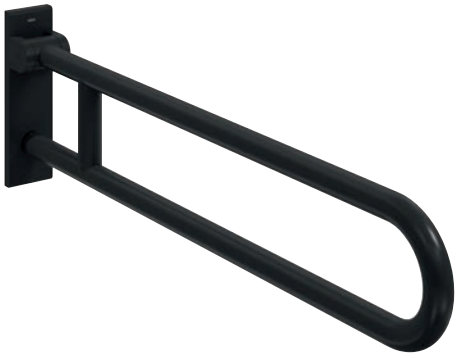

Drill hole



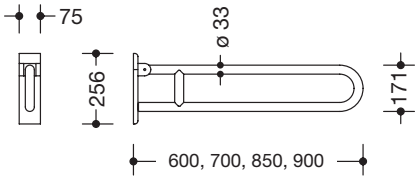


HEWI Hinged support rail

- two parallel bars running one above the other joined by a connecting bend, from a continuous tube formed
- can be folded upwards and, with friction device, downwards
- wall plate made of polyamide with integrated steel core and stainless steel cover
- covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately, see below)
- tested up to 150 kg when used with HEWI fixing material
- recommended maximum weight of the user: 150 kg
- sealing tape for sealing the fixing points included in delivery
- fulfils the requirements according to DIN 18040
- 256 mm high and 75 mm wide, rails ø 33 mm, tube thickness 2 mm
- made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)
- toilet roll holder 805.50B015 and WC-toilet flushing solution (radio) 805.50B060 for retrofitting
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500


available from November 2026


projection

805.50.20060 · 600 mm
805.50.21060 · 700 mm
805.50.22060 · 850 mm
805.50.23060 · 900 mm



Drill hole



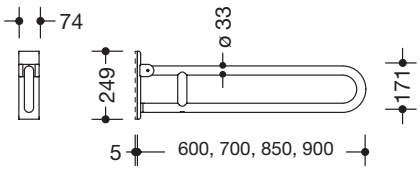

HEWI Mobile hinged support rail

- do., for mobile use, for easy and flexible retrofitting on pre-assembled HEWI mounting plate 950.50.016 (to be ordered separately
- toolless and quick installation by simple attachment of the mobile hinged support rails
- secured by fixing screw to prevent unintentional removal
- 249 mm high and 74 mm wide, rails ø 33 mm, tube thickness 2 mm
- made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)

available from November 2026

projection

805.50.20160 · 600 mm
805.50.21160 · 700 mm
805.50.22160 · 850 mm
805.50.23160 · 900 mm

Cannot be combined with backrest rails.


Fixing material to be ordered separately see page 49
for fixing on walls made of:

BM17.2 concrete > C20/C25, national technical approval number: ETA-11/0493
BM10.2 concrete > C20/C25
BM11.2 autoclaved aerated concrete (> P2)
BM12.2 lightweight walls with rear lining made of laminated timber boards ...
BM13.2 lightweight walls with integrated steel plates ...
BM18.2 hollow concrete block, vertically perforated bricks, solid bricks,..., national technical approval number: ETA-13/10366

HEWI Upgrade kits for hinged support rails to be ordered separately
pages 72-74


Item Number

Dimensions in mm / Specification

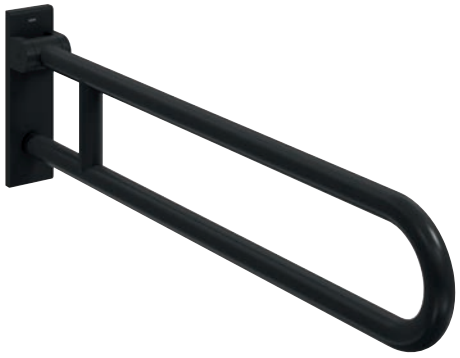

Drill hole



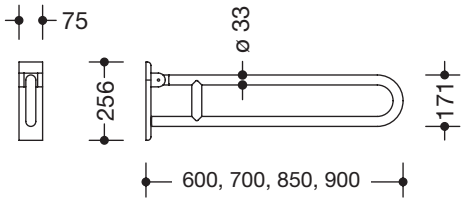

HEWI Hinged support rail, rotatable

- two parallel bars running one above the other joined by a connecting bend, from a continuous tube formed
- can be folded upwards and, with friction device, downwards, a turn to left or right locks support in vertical position
- wall plate made of polyamide with integrated steel core and stainless steel cover
- covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately, see below)
- tested up to 150 kg when used with HEWI fixing material
- recommended maximum weight of the user: 150 kg
- sealing tape for sealing the fixing points included in delivery
- fulfils the requirements according to DIN 18040
- 256 mm high and 75 mm wide, rails ø 33 mm, tube thickness 2 mm
- made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)
- toilet roll holder 805.50B015 and WC-toilet flushing solution (radio) 805.50B060 for retrofitting
- fulfils requirements acc. to DIN 18040, ÖNORM B1600/1601 a. SIA 500

available from November 2026


projection

805.50.10060
- 600 mm

805.50.11060
- 700 mm


805.50.12060
- 850 mm

805.50.13060
- 900 mm



Drill hole



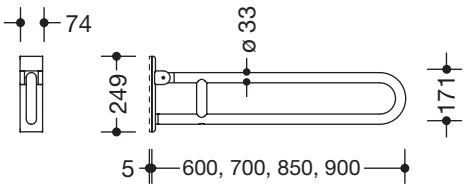

HEWI Mobile hinged support rail, rotatable

- do., for mobile use, for easy and flexible retrofitting on pre-assembled HEWI mounting plate 950.50.016 (to be ordered separately
- toolless and quick installation by simple attachment of the mobile hinged support rails
- secured by fixing screw to prevent unintentional removal
- 249 mm high and 74 mm wide, rails ø 33 mm, tube thickness 2 mm
- made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)

available from November 2026

projection

805.50.10160
- 600 mm

805.50.11160
- 700 mm

805.50.12160
- 850 mm

805.50.13160
- 900 mm

Cannot be combined with backrest rails.

□ ■

HEWI surfaces

□ **...60 DX** matt white
■ **...60 DC** matt black

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts


Item Number

Dimensions in mm / Specification




Drill hole



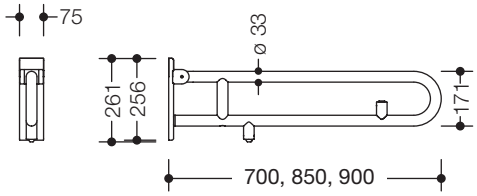

HEWI Hinged support rail, with flush release button, model E
· two parallel bars running one above the other joined by a connecting bend, from a continuous tube formed
· can be folded upwards and, with friction device, downwards
· wall plate made of glossy poyamide with with integrated steel core and stainless steel cover
· covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately, see below)
· tested up to 150 kg when used with HEWI fixing material
· recommended maximum weight of the user: 150 kg
· sealing tape for sealing the fixing points included in delivery
· 261 mm high and 75 mm wide, rails ø 33 mm, tube thickness 2 mm
· made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)
· button with blue ring to release flush
· spiral cable with free wire ends for wall connection
· including white cover for flush-mounted box
· control voltage max. 30V = SELV, PELV, switching current up to max. 2A
· suitable for all standard concealed cisterns with electrical control




available from November 2026

805.50.75060
805.50.76060
805.50.77060

projection
· 700 mm
· 850 mm
· 900 mm

Attention: cistern must be prepared for electric control.



available from November 2026

805.50.55060
805.50.56060
805.50.57060

HEWI Hinged support rail, rotatable, with flush release button, model E
· do., a turn to left or right locks support in vertical position

projection
· 700 mm
· 850 mm
· 900 mm

Attention: cistern must be prepared for electric control.

BM17.2
BM10.2
BM11.2
BM12.2
BM13.2
BM18.2

Fixing material to be ordered separately see page 49
for fixing on walls made of:

concrete > C20/C25, national technical approval number: ETA-11/0493
concrete > C20/C25
autoclaved aerated concrete (> P2)
lightweight walls with rear lining made of laminated timber boards ...
lightweight walls with integrated steel plates ...
hollow concrete block, vertically perforated bricks, solid bricks,...,
national technical approval number: ETA-13/10366

HEWI Upgrade kits for hinged support rails to be ordered separately
pages 72-74


Item Number

Dimensions in mm / Specification




Drill hole



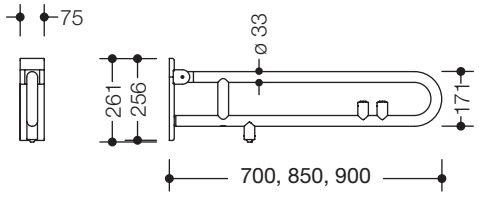

HEWI Hinged support rail, with flush release/function button, model E

· two parallel bars running one above the other joined by a connecting bend, from a continuous tube formed
· can be folded upwards and, with friction device, downwards
· wall plate made of glossy poyamide with with integrated steel core and stainless steel cover
· covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately, see below)
· sealing tape for sealing the fixing points included in delivery
· 261 mm high and 75 mm wide, rails ø 33 mm, tube thickness 2 mm
· made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)
· with integrated flush release/function button, model E
· button with blue ring to release flush, button with red ring for a specific function as required (the function button does not meet the requirements for an emergency call according to DIN VDE 0834-1)
· spiral cable with free wire ends for wall connection
· tested up to 150 kg when used with HEWI fixing material
· recommended maximum user weight: 150 kg
· including white cover for flush-mounted box
· control voltage max. 30V = SELV, PELV, switching current up to max. 2A
· suitable for all standard concealed cisterns with electrical control




available from November 2026

805.50.70560
805.50.71560
805.50.72560

projection
· 700 mm
· 850 mm
· 900 mm

Attention: cistern must be prepared for electric control.

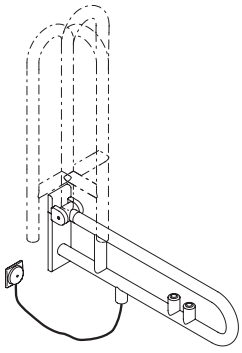

available from November 2026

805.50.50560
805.50.51560
805.50.52560

HEWI Hinged support rail, rotatable, with flush release/function button, model E

· do., a turn to left or right locks support in vertical position

projection
· 700 mm
· 850 mm
· 900 mm

Attention: cistern must be prepared for electric control.

□ ■

Fixing material to be ordered separately see page 49
for fixing on walls made of:

BM17.2	concrete > C20/C25, national technical approval number: ETA-11/0493
BM10.2	concrete > C20/C25
BM11.2	autoclaved aerated concrete (> P2)
BM12.2	lightweight walls with rear lining made of laminated timber boards ...
BM13.2	lightweight walls with integrated steel plates ...
BM18.2	hollow concrete block, vertically perforated bricks, solid bricks,..., national technical approval number: ETA-13/10366

HEWI surfaces


□ **...60 DX** matt white
■ **...60 DC** matt black

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number

Dimensions in mm / Specification



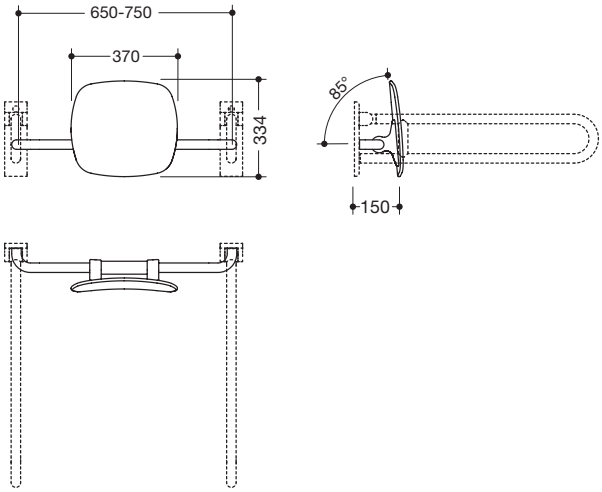

available from November 2026

805.51.90660


HEWI Backrest rail
- padded backrest with right-angled fixing rails on each side
- for fitting to hinged support rails with wall mounting plate of Range 805 Classic
- c to c from 650 to 750 mm adjustable on site
- 150 mm deep, rails ø 33 mm
- backrest 370 mm wide and 334 mm high
- backrest made of synthetic material in HEWI colours 98 (signal white) and 90 (jet black)
- connection made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)
- fulfils the requirements acc. to DIN 18040 and ÖNORM B 1600/1601

Attention: Fixing material for backrest rail BM1...2.1 according to the table on the right to be ordered separately

If the backrest rail is to be mounted individually, use 805.5191660 with roses. Supplied only with HEWI fixing material.

□ ■ Rails
▨ ■ Backrest



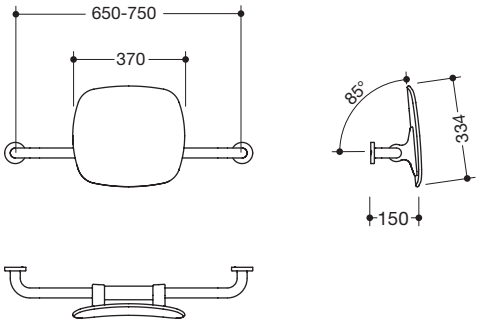

available from November 2026


805.51.91660


HEWI Backrest rail
- padded backrest with right-angled fixing rails on each side and rose fixings
- for wall mounting with roses
- c to c from 650 to 750 mm, adjustable on site
- 150 mm deep, rails ø 33 mm, roses ø 70 mm
- backrest 370 mm wide and 334 mm high
- backrest made of synthetic material in HEWI colours 98 (signal white) and 90 (jet black)
- connection made of high-quality stainless steel, powder-coated in HEWI colours DX (matt white) and DC (matt black)
- fulfils the requirements acc. to DIN 18040 and ÖNORM B 1600/1601
- isupplied with fixing material BM211, see online catalogue

□ ■ Rails
▨ ■ Backrest

Item Number

Dimensions in mm / Specification

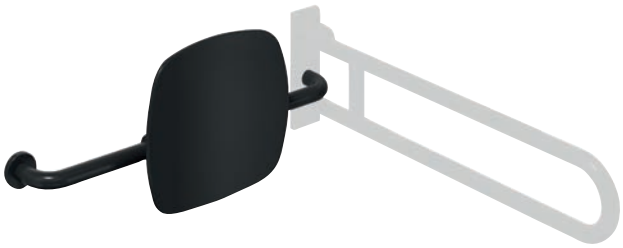

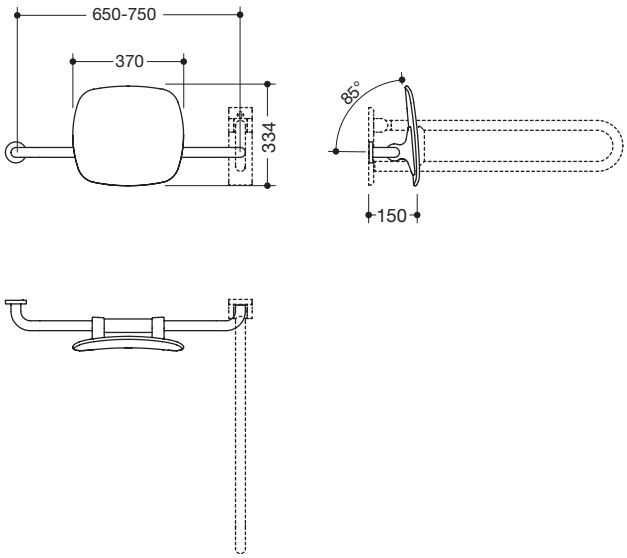

Version left

HEWI Backrest rail
- beidseitig angebrachte, rechtwinklig gebogene rails and einseitige Befestigungsrosette
- einseitig Montage an der Wand with rose
- einseitig Montage an powder-coateden Hinged support railen
- c to c von 650 - 750 mm adjustable on site
- 150 mm deep, rails ø 33 mm, rose ø 70 mm
- backrest 370 mm wide and 334 mm high
- backrest aus Kunststoff in HEWI colours 98 (signal white) and 90 (jet black)
- connection made of high-quality stainless steel, powder-coated in den HEWI colours DX (matt white) and DC (matt black)
- fulfils the requirements acc. to DIN 18040 and ÖNORM B 1600/1601

available from November 2026


805.51.92860 — **left handed version** (from users point of view)
- rail left, rose right

805.51.92960 — **right handed version** (from users point of view)
- rail right, rose left

Attention: Fixing material for backrest rail BM1...2.2 on handle side order separately according to table below

☐ ■ Rails
☒ ■ Backrest

Supplied only with HEWI fixing material.



Fixing material for backrest rail on hinged support rail see also page 50

Hinged support rail	**Backrest rail** beidseitig (für 805.51.90660, ...90760)	**Backrest rail** einseitig (für 805.51.92860, ...92960)
BM10.2, BM17.2	**BM10.2.1**	**BM10.2.2**
BM11.2, BM18.2	**BM11.2.1**	**BM11.2.2**
BM12.2	**BM12.2.1**	**BM12.2.2**
BM13.2	**BM13.2.1**	**BM13.2.2**


HEWI colours | surfaces

☒ ■ 98 90
☐ **...60 DX** matt white
■ **...60 DC** matt black

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

	Item Number	Dimensions in mm / Specification






available from February 2027

805.50B015

HEWI Upgrade kit toilet roll holder
· right angle-shaped toilet roll holder
· for simple installation and for retrofitting with hinged support rails of Range 805 Classic
· easy installation
· with integrated roll brake
· 35 mm wide, 131 mm high, 139 mm deep
· made of high-quality, matt polyamide in HEWI colours 90 (jet black) and 98 (signal white)

Please advise colour when ordering.





available from February 2027

805.50B060

HEWI Upgrade kit WC-toilet flushing solution (radio)
· WC-toilet flushing solution (radio) for simple installation and for retro-fitting with hinged support rails of Range 805 Classic
· 50 mm wide, 68 mm high, 105 mm long
· made of high-quality, matt polyamide in HEWI colours 90 (jet black) and 98 (signal white)
· transmission frequency 868,4 MHz
· suitable for radio-controlled WC flushing systems of Geberit, Mepa, Viega, Sanit, Friatec, TECE and Groh

Please advise colour when ordering.

Fixing material to be ordered separately see page 49
for fixing on walls made of:

BM17.2	Beton > C20/C25, allg. bauliche Zulassungsnummer: ETA-11/0493
BM10.2	Beton > C20/C25
BM11.2	Porenbeton (> P2)
BM12.2	Leichtbauwänden with Hinterfütterung aus Schichtholzplatten ...
BM13.2	Leichtbauwänden with integrierten Stahlplatten ...
BM18.2	Hohlblocksteinen, Hochlochziegel, Vollziegel,..., allgemeine bauliche Zulassungsnummer: ETA-13/1036

8 HEWI colours

98 90

Fittings




	Item Number	Dimensions in mm / Specification









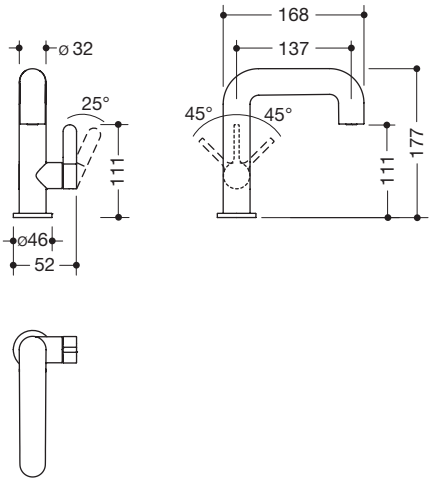

HEWI Single lever washbasin mixer tap AQ 111
· cubic, flow rate 5 l/min
· ceramic cartridge Kerox K-35OP, pressure resistant up to 35 bar
· laminar jet controller with dynamic flow control 5 l/min
· connection via flexible pressure hoses with woven-in hot-cold marking, 450 mm long, G 3/8”
· lateral operating lever with hot-cold marking
· 177 mm high, projection 137 mm
· rigid outlet
· without waste set
· suitable for thermal disinfection to DVGW W 551
· noise class 1

AQ1.12M11140	· chrome-plated
AQ1.12M11160	· powder-coated in HEWI colours DX (matt white) and DC (matt black)
AQ1.12M11170	· PVD coated in HEWI surface CK (brass glossy)

65087	**HEWI Mini thermostat**

Item Number


Dimensions in mm / Specification









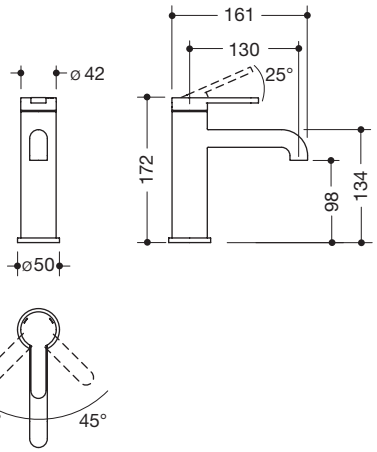

HEWI Single lever washbasin mixer tap AQ 477

· cubic, flow rate 5 l/min
· ceramic cartridge Kerox K-35OP, pressure resistant up to 35 bar
· laminar jet controller with dynamic flow control 5 l/min
· Anschluss über flexible Druckschläuche with Warm-Kalt-Markierung 450 mm long, G 3/8”
· operating lever with hot-cold marking
· 172 mm high, projection 130 mm
· rigid outlet
· without waste set
· suitable for thermal disinfection to DVGW W 551
· noise class 1

AQ1.12M11240
· chrome-plated


AQ1.12M11260
· powder-coated in HEWI colours DX (matt white) and DC (matt black)

AQ1.12M11270
· PVD coated in HEWI surface CK (brass glossy)

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number | Dimensions in mm / Specification



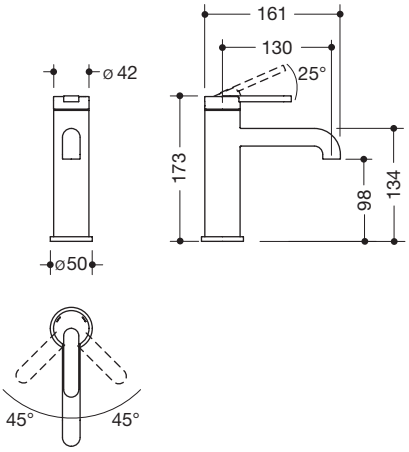



HEWI Single lever washbasin mixer tap AQ 477
- cubic, flow rate 5 l/min
- ceramic cartridge Kerox K-35OP, pressure resistant up to 35 bar
- laminar jet controller with dynamic flow control 5 l/min
- Anschluss über flexible Druckschläuche with Warm-Kalt-Markierung 450 mm long, G 3/8”
- operating lever with hot-cold marking
- 173 mm high, projection 130 mm
- rigid outlet
- without waste set
- suitable for thermal disinfection to DVGW W 551
- noise class 1

AQ1.12M11340
- chrome-plated with coloured grip element in 18 HEWI colours (premium colours at an additional cost)

AQ1.12M11360
- powder-coated in matt black with coloured grip element in 18 HEWI colours (premium colours at an additional cost)

AQ1.12M11460
- powder-coated in matt white with coloured grip element in 18 HEWI colours (premium colours at an additional cost)



18 HEWI colours

98 99 97 95 92 90 86 84


18 24 36 33 43* 77* 74 72 55 50

*10% surcharge for premium colours

65087
65754
950.33.E03...
950.33.E05...

HEWI Mini thermostat
HEWI Shower hose drain valve to be ordered separately
HEWI Hand shower to be ordered separately, see online catalogue
HEWI Shower hose to be ordered separately, see online catalogue

Item Number | Dimensions in mm / Specification

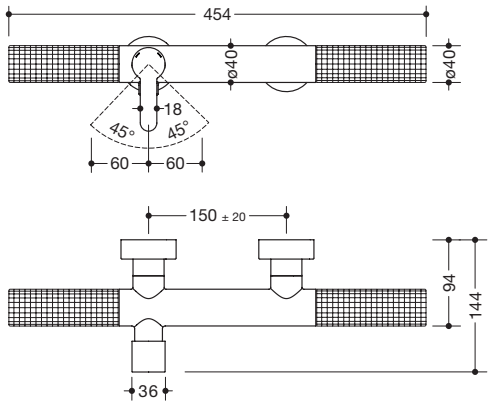





AQ1.32M10240
AQ1.32M10260



HEWI Single lever shower thermostat

· handle elements for fall prevention
· handle elements can be fitted – on one side or both sides – with the supplied cap
· round, flow rate 12 l/min
· fitting body, control and roses: brass
· metal control elements
· Kerox K-25 ceramic cartridge, pressure-resistant up to 35 bar
· non-return valve in the shower outlet with integrated, dynamic flow control, integrated dirt-trapping strainers
· standard shower outflow G 1/2” for standard shower hoses
· hot-cold marking
· connection type: S-connections with integrated silencers, push-on roses
· 103 mm high, 454 mm wide, projection 145 mm
· noise class 1
· suitable for thermal disinfection according to DVGW W 551

· chrome-plated
· powder-coated in HEWI colours DC (matt black) or DX (matt white)


Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Washbasins



Item Number	Dimensions in mm / Specification



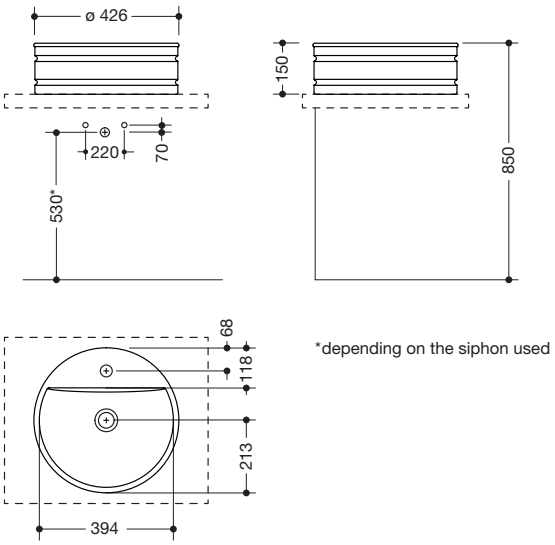

*depending on the siphon used



950.11.000

HEWI Countertop washbasin DUO
· for mounting on furniture/consoles
· made of high-quality sanitary ceramics
· single-colour washbasin
· glossy surface in colour white (TJ)
· easy to clean and hygienic surface
· prepared for single-hole fitting
· without overflow
· ø 426 mm, 150 mm high
· wash trough depth 120 mm
· incl. fixing material for mounting

950.11.001

· do., washbasin two-coloured
· inner basin: glossy white,
outer surface: glossy grey

950.11B001

· do., washbasin two-coloured
· inner basin: glossy white,
outer surface: matt black




Ceramics

Item Number

Dimensions in mm / Specification



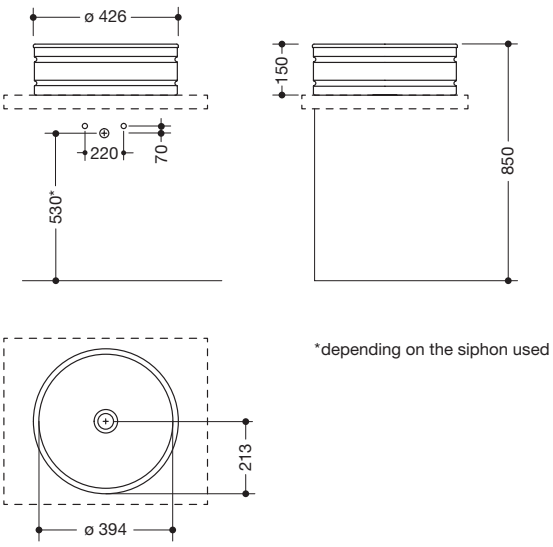

*depending on the siphon used



950.11.002

HEWI Countertop washbasin DUO
· for mounting on furniture/consoles
· made of high-quality sanitary ceramics
· single-colour washbasin
· glossy surface in colour white (TJ)
· easy to clean and hygienic surface
· for wall outlet fittings and fittings with a raised base
· without overflow
· ø 426 mm, 150 mm high
· wash trough depth 120 mm
· incl. fixing material for mounting

950.11.003

· do., washbasin two-coloured
· inner basin: glossy white,
outer surface: glossy grey

950.11B003

· do., washbasin two-coloured
· inner basin: glossy white,
outer surface: matt black




Ceramics

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

	Item Number	Dimensions in mm / Specification



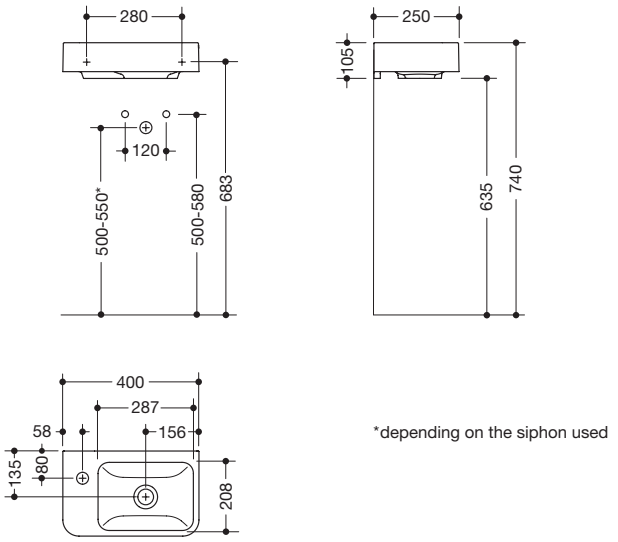


*depending on the siphon used

950.11.012

HEWI Hand washbasin
· made of mineral composite with non-porous surface, alpine white
· rectangular basin with generous radii
· without overflow
· prepared for single-hole fitting
· fitting and tap hole bench left
· resilient according to DIN EN 14688
· 400 mm wide and 250 mm deep
· wash trough depth 80 mm
· for hanger bolt fixing
· fulfils the requirements acc. to BS-Standard BS 8300:2009 (+A1:2010)/ Doc M

Mineral composite



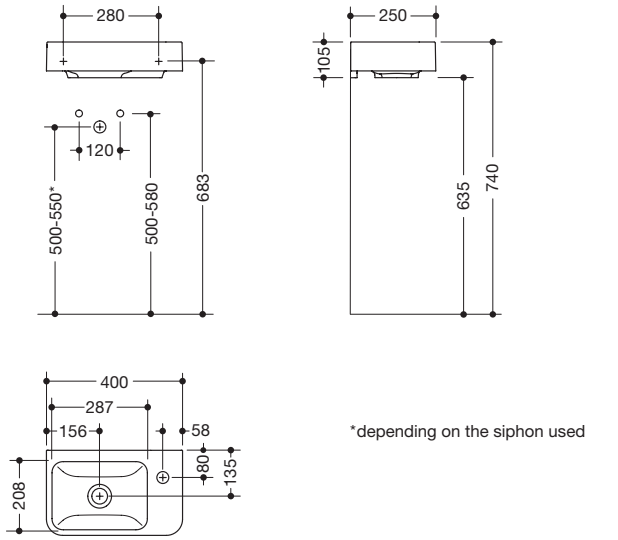

*depending on the siphon used

950.11.013


HEWI Hand washbasin
· do., fitting and tap hole bench right

Mineral composite

Item Number

Dimensions in mm / Specification



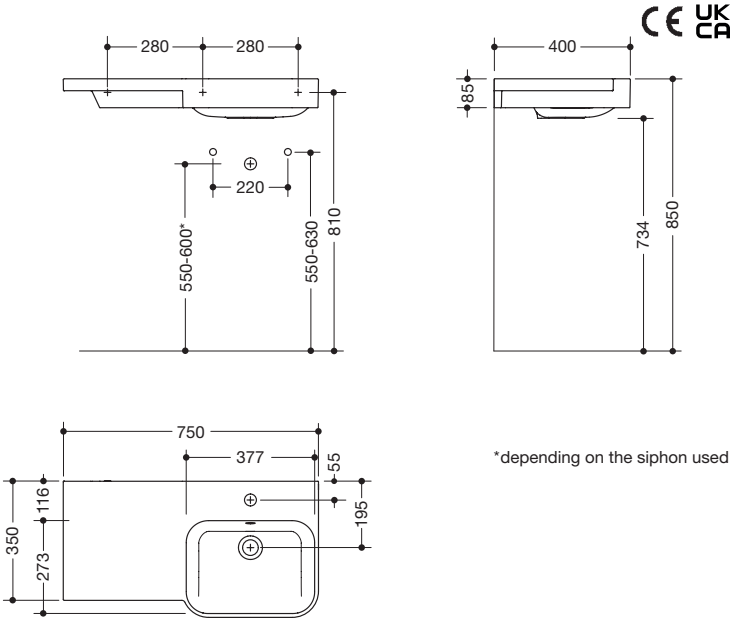

*depending on the siphon used


950.11.016

HEWI Hand washbasin with shelf

· made of mineral composite with non-porous surface, alpine white
· 750 mm wide and 400 mm deep
· rectangular basin with generous radii
· with large shelf on the left
· including overflow, with rose and cover
· overflow can be replaced and renewed if necessary
· overflow is mounted between drain and siphon under the washbasin, 25 mm high, ø 70 mm
· prepared for single-hole fitting
· resilient according to DIN EN 14688
· wash trough depth 100 mm
· for hanger bolt fixing
· fulfils the requirements of SIA 500

Mineral composite



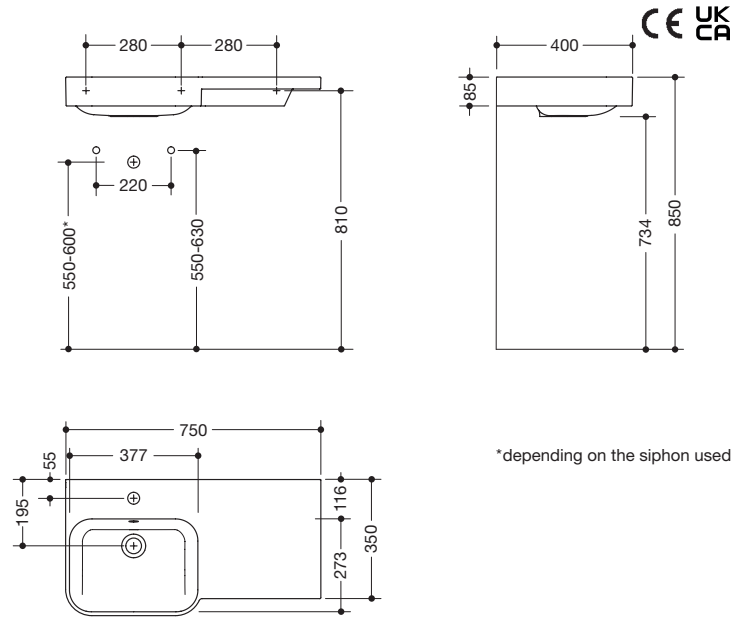

*depending on the siphon used

950.11.017

HEWI Hand washbasin with shelf


· do., with large shelf on the right

Mineral composite

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

	Item Number	Dimensions in mm / Specification



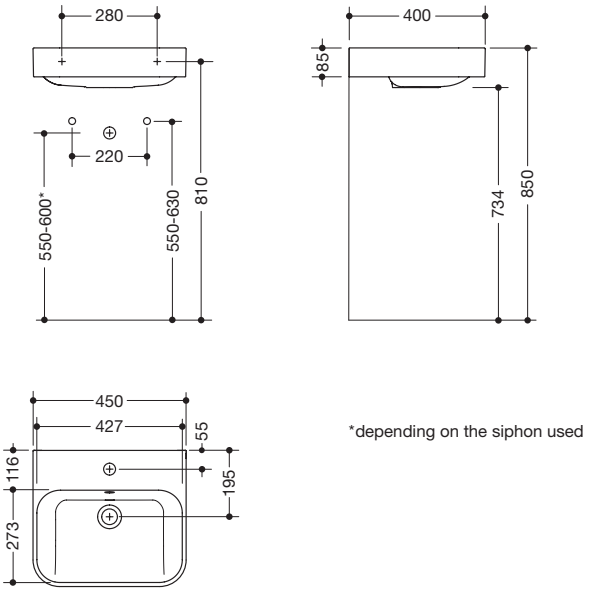


*depending on the siphon used

950.11.014

HEWI Washbasin
· made of mineral composite with non-porous surface, alpine white
· rectangular basin with generous radii
· incl. overflow, with rose and cover
· overflow can be replaced and renewed if necessary
· overflow is mounted between drain and siphon under washbasin, 25 mm high, ø 70 mm
· prepared for single-hole fitting
· resilient according to DIN EN 14688
· 450 mm wide and 400 mm deep
· wash trough depth 100 mm
· for hanger bolt fixing

Mineral composite



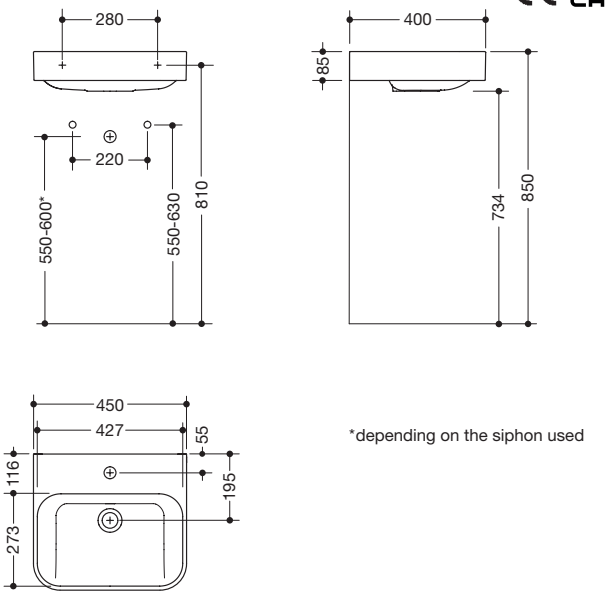

*depending on the siphon used

950.11.015

HEWI Washbasin
· do., without overflow


Mineral composite

Item Number

Dimensions in mm / Specification

CE UK CA



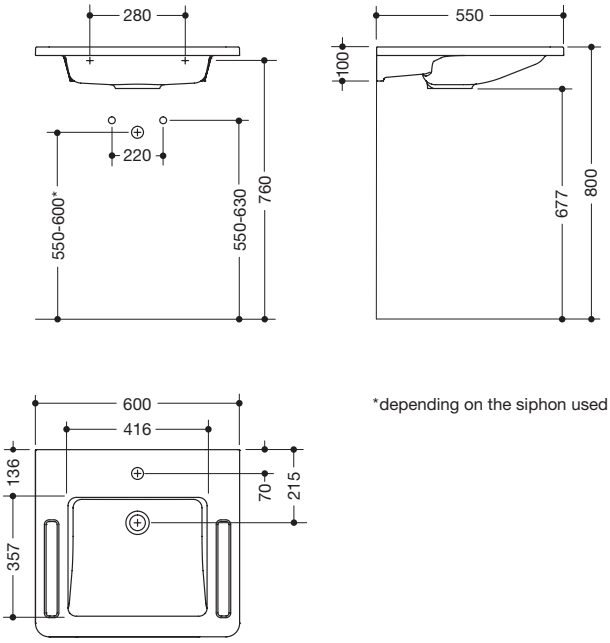

*depending on the siphon used

950.11.018

HEWI Washbasin Basic
· made of mineral composite with non-porous surface, signal white
· with shelf and rectangular basin with generous radii
· integrated holding option at the side, can be used as a towel holder
· without overflow
· prepared for single-hole fitting
· wheelchair accessible in accordance with DIN 18040 and ÖNORM B1600/1601
· resilient according to DIN EN 14688
· 600 mm wide and 550 mm deep
· 25 mm material thickness of the shelves
· wash trough size: 409 mm x 349 mm
· wash trough depth: shallow sloping up to max. 100 mm
· with concealed grip edge
· for hanger bolt fixing



950.11.019

· do., with overflow

Mineral composite

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

New individual products from various ranges/systems




	Item Number	Dimensions in mm / Specification









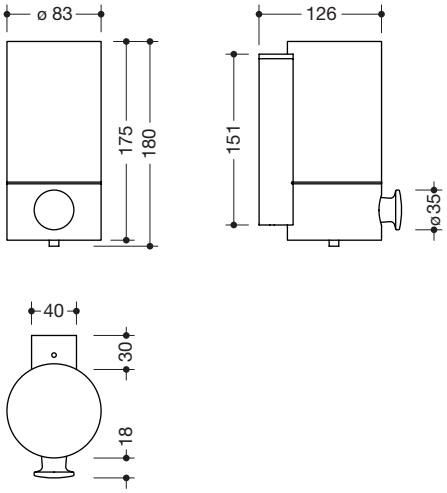

HEWI Soap- or disinfectant dispenser
· to be filled with standard liquid soap and disinfectant
· main body and holder made of high-quality stainless steel
· push button and spacer ring made of high-quality matt synthetic material in HEWI colours 98 (signal white) or 90 (jet black)
· 83 mm wide, 180 mm high, 126 mm deep, body ø 83 mm
· capacity approx. 350 ml
· labels (soap/hand sanitizer) included
· dosage controlled by a large pushbutton on the front panel
· allows one-hand operation
· container lid can be removed for filling and locked in place if necessary
· holder requires a locking system for removal (theft protection)
· for wall mounting, concealed fixing
· including non-corrosive HEWI fixing material

480.06.000XA	· satin finished with black or white push button*
480.06.000XC	· mirror polished (chrome-look), suitable for chrome-plated surfeces and WARM TOUCH with black or white push button*
480.06.00060	· powder-coated in HEWI colours DC (matt black) and SC (matt dark grey pearl mica) with black push button or powder-coated in HEWI colour DX (matt white) with white push button
480.06.00070	· PVD coated with white push button
480.06.00070	· PVD coated with black push button

* Please advise colour of push button when ordering.

HEWI surfaces


XA Chr
...60 DX matt white
...60 SC matt dark grey pearl mica
...60 DC matt black


HEWI PVD coating

...70 CK brass glossy
...70 LP brass brushed
...70 WR nickel brushed
...70 SV bronze brushed

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number	Dimensions in mm / Specification

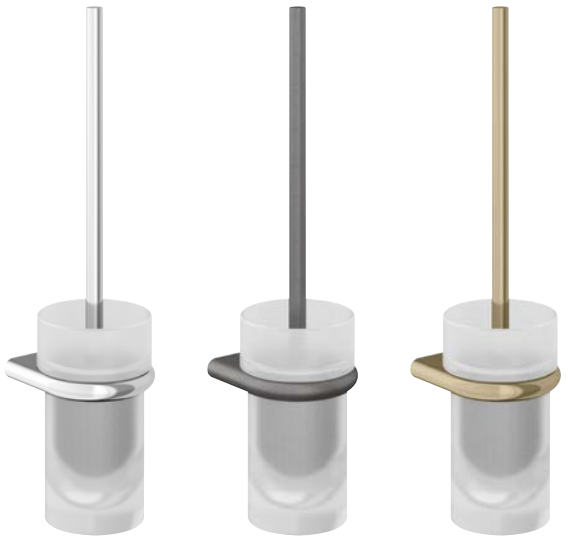

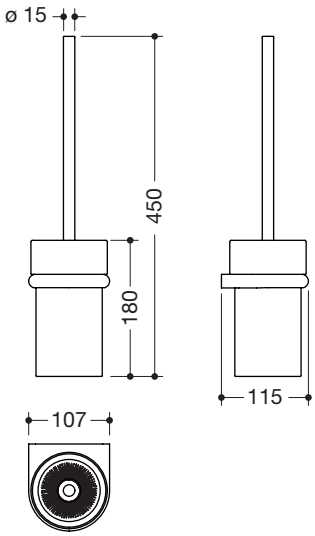

HEWI Toilet brush unit
- consisting of ring-shaped holder, cylindrical toilet brush container and toilet brush
- brush head can be replaced due to bayonet fixing
- brush container made of high-quality, satin crystal glass, can be removed for cleaning
- made of high-quality stainless steel
- 107 mm wide, 447 mm high, 115 mm deep
- for wall mounting, concealed fixing
- including non-corrosive HEWI fixing material

480.20.00140
480.20.00160
- chrome-plated
- powder-coated in HEWI colours DX (matt white), SC (matt dark grey pearl mica) and DC (matt black)

480.20.00170
- PVD coated

100.20.E01 **HEWI Glass insert for toilet brush unit**

HEWI PVD coating
- **...70 CK** brass glossy
- **...70 LP** brass brushed
- **...70 WR** nickel brushed
- **...70 SV** bronze brushed

Item Number


Dimensions in mm / Specification










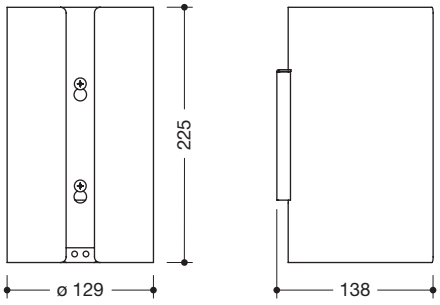



HEWI Enclosed spare roll holder
· cylindrical spare roll holder designed to hold two WC toilet rolls
- recess for easy removal of WC rolls
· made of high-quality stainless steel
· 225 mm high, 138 mm deep, ø 129 mm
· for wall mounting
· including non-corrosive HEWI fixing material

900.21.007XA · satin finished
900.21.007XC · mirror polished
900.21.00760 · powder-coated in HEWI colours DX (matt white), SC (matt dark grey pearl mica) and DC (matt black)


900.21.00770 · PVD coated


HEWI surfaces

XA Chr
...60 DX matt white
...60 SC matt dark grey pearl mica
...60 DC matt black

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number	Dimensions in mm / Specification

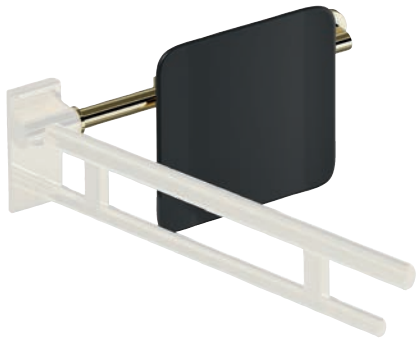

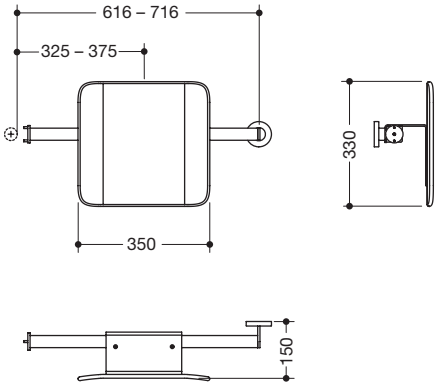

HEWI Mobile backrest rail
· backrest with fixing rails on each side
· one-sided wall mounting with roses
· one-sided mounting with hinged support rail from System 900 (design A)
· for mobile use
· 330 mm high and 150 mm deep, backrest 350 mm wide
· rails ø 32 mm, tube thickness 2 mm
· c to c adjustable on site (clear dimension between bar of hinged support rail and c to c distance of the wall fastening 616-716 mm)
· easy wall mounting due to individually mountable stainless steel fastening plate for hanging the rail
· is secured with fastening screw (theft protection)
· connection made of high-quality stainless steel, PVD coated
· including non-corrosive and tested HEWI fixing material
· fulfils the requirements acc. to DIN 18040 and ÖNORM B1600/1601

Version right (from users point of view)

900.51.91370
· rail right, rose left
· backrest made of synthetic material in HEWI colour 98 (signal white)

900.51.92570
· backrest made of synthetic material in HEWI colour 90 (jet black)

Version left (from users point of view)


900.51.91270
· rail left, rose right
· backrest made of synthetic material in HEWI colour 98 (signal white)

900.51.92470
· backrest made of synthetic material in HEWI colour 90 (jet black)

HEWI PVD coating
...70 CK brass glossy
...70 LP brass brushed
...70 WR nickel brushed
...70 SV bronze brushed

	Item Number	Dimensions in mm / Specification




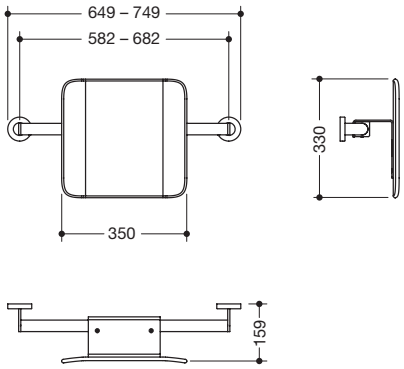

HEWI Mobile backrest rail
· backrest with right-angled fixing rails on each side and fixing roses
· for wall mounting
· for mobile use
· 330 mm high and 150 mm deep, backrest 350 mm wide
· rails ø 32 mm, tube thickness 2 mm
· c to c from 582 to 682 mm adjustable on site
· easy wall mounting due to individually mountable stainless steel fastening plate for hanging the rail
· is secured with fastening screw (theft protection)
· connection made of high-quality stainless steel, PVD coated
· including non-corrosive and tested HEWI fixing material
· fulfils the requirements acc. to DIN 18040 and ÖNORM B1600/1601

	900.51.91170	· backrest made of synthetic material in HEWI colour 98 (signal white)
	900.51.92370	· backrest made of synthetic material in HEWI colour 90 (jet black)



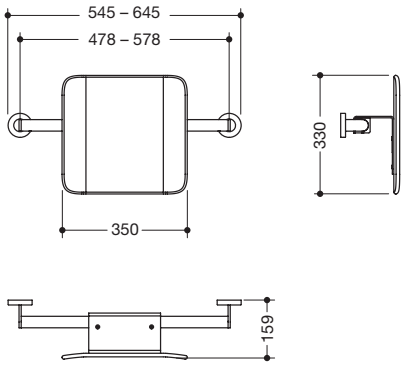


HEWI Mobile backrest rail
· backrest with right-angled fixing rails on each side and fixing roses
· for wall mounting
· for mobile use
· 330 mm high and 150 mm deep, backrest 350 mm wide
· rails ø 32 mm, tube thickness 2 mm
· c to c from 478 to 578 mm adjustable on site
· easy wall mounting due to individually mountable stainless steel fastening plate for hanging the rail
· is secured with fastening screw (theft protection)
· connection made of high-quality stainless steel, PVD coated
· including non-corrosive and tested HEWI fixing material
· fulfils the requirements acc. to BS-Standard BS 8300:2009 (+A1:2010)/ Doc M

	900.51.91470	· backrest made of synthetic material in HEWI colour 98 (signal white)
	900.51.92670	· backrest made of synthetic material in HEWI colour 90 (jet black)

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number	Dimensions in mm / Specification



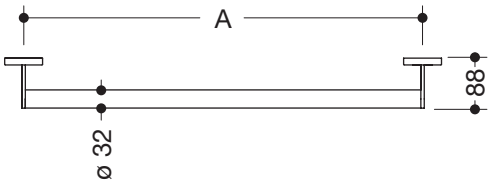

HEWI Mobile support rail ø 32 mm
· for mobile use
· rail ø 32 mm, 88 mm deep, tube thickness 2 mm, roses ø 70 mm
· made of high-quality stainless steel, PVD coated
· upgrade kit toilet roll holder for retrofitting
· tested up to 200 kg when used with HEWI fixing material, recommended maximum weight of the user: 150 kg (does not apply for A = 1000 mm and special lengths)
· easy installation due to individually mountable stainless steel fixing plates (included in delivery), for hanging the support rail
· is secured with fastening screw (theft protection)
· incl. non-corrosive and tested HEWI fixing material for wall mounting
· additional sealing of the drilling points possible with sealing tape (included in delivery)
· for HEWI removable hanging seats according to table


	c to c
900.36.00870	300 mm
900.36.00970	400 mm
900.36.01070	500 mm
900.36.01170	600 mm
900.36.01270	700 mm
900.36.01370	800 mm
900.36.01470	900 mm
900.36.01570	1000 mm

When using with removable hanging seats, please note!
Compatibility testing required. A detailed list of the possible combinations of support rails, L-shaped support rails and shower head rails with matching removable hanging seats can be found in our online catalogue in the download area of the respective product.

HEWI PVD coating
...70 CK brass glossy
...70 LP brass brushed
...70 WR nickel brushed
...70 SV bronze brushed

	Item Number	Dimensions in mm / Specification






900.36.018XA

HEWI Mounting plate for mobile support rails and backrest rails
· to hold and fix mobile support rails 900.36... and mobile backrest rails 900.51.91..
· 40 mm wide, 47 mm high, 7 mm deep
· made of stainless steel
· for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)






900.36.01670

HEWI Cover for mounting plate of mobile support rails and backrests
· for cover of the mounting plate by simple replacement
· is secured with fastening screw (theft protection)
· ø 70 mm, 12 mm deep
· made of high-quality stainless steel, PVD coated





900.36.01770

HEWI Mounting plate with cover of mobile support rails and backrests
· rectangular mounting plate with matching, round cover
· to hold mobile support rails 900.36... and mobile backrest rails 900.51.91..
· cover ø 70 mm, 12 mm deep
· cover made of high-quality stainless steel, PVD coated
· mounting plate made of stainless steel
· for mounting with corrosion-free and tested HEWI fixing material for different wall constructions (to be ordered separately)
· supplied per pair


Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

Item Number	Dimensions in mm / Specification

CE


Drill hole



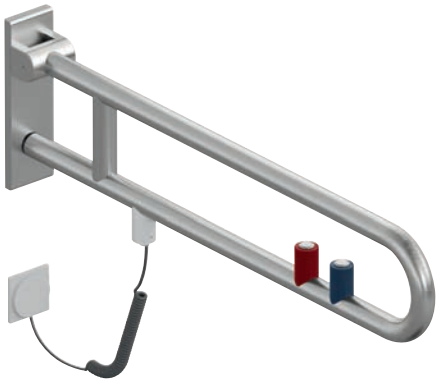


HEWI Hinged support rail, with flush release/function button, model E

· two parallel bars running one above the other joined by a connecting bend, from a continuous tube formed
· loading capacity according to DIN 18040 up to 100 kg
· can be folded upwards and, with friction device, downwards
· wall plate made of polyamide with integrated steel core and stainless steel cover
· covered, non-corrosive and tested HEWI fixing material for different wall constructions (to be ordered separately, see below)
· sealing tape for sealing the fixing points included in delivery
· 261 mm high and 75 mm wide, rails ø 33 mm, tube thickness 2 mm
· made of high-quality stainless steel, satin finished
· button with blue ring to release flush, button with red ring for a specific function as required (the function button does not meet the requirements for an emergency call according to DIN VDE 0834-1)
· spiral cable with free wire ends for wall connection
· tested up to 150 kg when used with HEWI fixing material
· recommended maximum user weight: 150 kg
· control voltage max. 30V = SELV, PELV, switching current up to max. 2A
· suitable for all standard concealed cisterns with electrical control· incl. white cover for the flush-mounted socket



805.50.705	700 mm projection
805.50.715	850 mm projection
805.50.725	900 mm projection

Attention: cistern must be prepared for electric control.



HEWI Hinged support rail, rotatable, with flush release/function button, model E

· do., a turn to left or right locks support in vertical position

805.50.505	700 mm projection
805.50.515	850 mm projection
805.50.525	900 mm projection

Attention: cistern must be prepared for electric control.

Fixing material to be ordered separately see page 49
for fixing on walls made of:

BM17.2	concrete > C20/C25, national technical approval number: ETA-11/0493
BM10.2	concrete > C20/C25
BM11.2	autoclaved aerated concrete (> P2)
BM12.2	lightweight walls with rear lining made of laminated timber boards ...
BM13.2	lightweight walls with integrated steel plates ...
BM18.2	hollow concrete block, vertically perforated bricks, solid bricks,..., national technical approval number: ETA-13/10366


HEWI Upgrade kits for hinged support rails to be ordered separately
see pages 403-409 of the current price list


Item Number | Dimensions in mm / Specification

CE



Drill hole



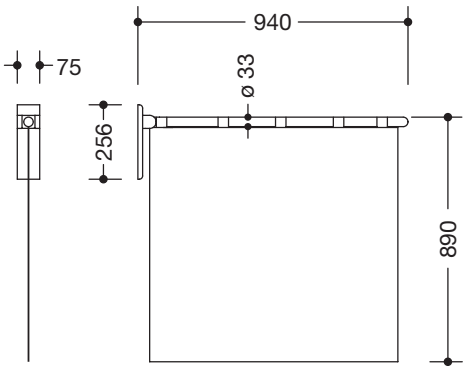

805.52.20030 **542,00** **80**

HEWI Shower spray guard
- can be folded upwards and, with friction device, downwards
- wall mounting plate made of high-quality polyamide with integrated steel insert and stainless steel cover
- covered, non-corrosive and tested HEWI fixing material for different wall constructions
- sealing tape for sealing the fixing points included in delivery
- shower spray guard curtain
  - with seamed side edges, bottom edge with stainless steel roll seam
  - held in place on rail with Velcro fasteners
  - washable at 40 °C and disinfectable at 60 °C
  - microbial and bacterial resistant
  - with antimicrobial finish based on silver
  - 850 mm high and 880 mm wide or to order
  - shower proof, antistatic, made of 100 % Trevira CS in white pattern
  - fire retardant to DIN 4102/B1
- rail 940 mm long, ø 33 mm, total height with curtain 967 mm
- wall plate 75 mm wide, 256 mm high
- made of high-quality stainless steel, satin finished

801.52.010...

HEWI Shower spray guard curtain see register Range 801 page 149 of the current pricelist or online

▨

Fixing material to be ordered separately see page 49
for fixing on walls made of:

BM17.2	concrete > C20/C25, national technical approval number: ETA-11/0493
BM10.2	concrete > C20/C25
BM11.2	autoclaved aerated concrete (> P2)
BM12.2	lightweight walls with rear lining made of laminated timber boards ...
BM13.2	lightweight walls with integrated steel plates ...
BM18.2	hollow concrete block, vertically perforated bricks, solid bricks,..., national technical approval number: ETA-13/10366

HEWI surfaces

▨
XA

Detailed information about the spare parts can be found here:
www.hewi.com/en/spare-parts

International terms and conditions of sale

§ 1 Applicability of these International Terms and Conditions of Sale

(1) The terms and conditions set out in these International Terms and Conditions of Sale, which form an integral part of the Contract of Sale, apply to all Contracts of Sale concluded as of 2 January 2020 if the buyer's relevant place of business is outside of Germany. These International Terms and Conditions of Sale apply exclusively. The buyer's terms and conditions which conflict or differ from these International Terms and Conditions of Sale and/or from the legal provisions do not apply, even if we do not object to them or render performance or accept the buyer's performance.

(2) These Terms and Conditions of Sale do not apply if the goods are bought for personal, family or household use and we knew or ought to have known at any time before or at conclusion of the Contract of Sale that the goods were bought for any such use. The buyer declares that the goods are not bought for personal, family or household use.

§ 2 Formation of the Contract of Sale

(1) A Contract of Sale always requires a written order of the buyer.

(2) We may accept the buyer's written order with our order acknowledgement (hereinafter the "Order Acknowledgement") within 10 (ten) calendar days after receipt of the buyer's order.

§ 3 Applicable Law

(1) The Contract of Sale is governed by the United Nations Conventions of 11 April 1980 on Contracts for the International Sale of Goods (UN Sales Convention/ CISG) in the English version and all legal questions beyond the scope of the CISG are governed by the Swiss law of obligations (Obligationenrecht). The CISG also applies to all agreements as to the jurisdiction of courts and arbitral tribunals.

(2) Should commercial terms be used the Incoterms® 2020 of the International Chamber of Commerce apply taking into account the provisions stipulated in these International Terms and Conditions of Sale.

§ 4 Specifications of the goods; Third party rights

(1) The goods to be delivered have to conform to the specifications and quality requirements set out in the Order Acknowledgement. To the extent no specifications or quality requirements are stated in the Order Acknowledgement, the goods conform with the contract if they are fit for the purpose which is usual in Germany and fit for the purpose for which goods of the same description are usually used for in Germany. Unless otherwise explicitly agreed to, the goods do not have to conform to any laws or regulations existing outside of Germany. Should the conformity of the goods depend on the field of application of the goods, the buyer shall also be responsible for ensuring that the goods are suitable for the purpose intended by him.

(2) Should the buyer intend to use the goods in circumstances which are unusual or which could entail a particular risk to the safety and health of any person or to the environment, the buyer has to inform us in writing about these intentions before concluding the Contract of Sale.

(3) Rights and claims of third parties (in particular rights and claims based on title or industrial property rights) only constitute a defect in title if these rights and/or claims are in force and registered in Germany and impede the use of the goods in Germany.

§ 5 Obligation to deliver; Passing of risk

(1) We have to deliver the goods referred to in the Order Acknowledgement including a packaging that is suitable for the means of transportation.

(2) Delivery has to be made FCA Incoterms 2020 at our premises in 34454 Bad Arolsen/Germany. We are not obliged to contract for carriage and we are not obliged to inform the buyer that the goods have been delivered or that the carrier or another person nominated by the buyer has failed to take the goods within the time agreed. We are how-ever entitled to contract for carriage in our own name at the buyer's risk and expense; the costs resulting therefrom will be charged to the buyer with the invoice. We are also entitled to contract for carriage on behalf of the buyer at the buyer's risk and expense. In all such instances where we contract for carriage at buyer's risk and expense, the place of performance for delivery will be 34454 Bad Arolsen/ Germany.

(3) Adherence to the delivery date respectively the delivery period stated in the Order Acknowledgement is not of the essence and non-adherence to the delivery date or the delivery period respectively does not constitute a fundamental breach of contract. If delivery periods are agreed to, we reserve the right to determine the exact delivery time within the delivery period.

(4) All delivery dates and delivery periods are dependent upon the buyer performing all of his obligations in due time. In particular, the buyer has to procure or confirm any necessary permits, drawings etc. and make agreed payments in due time.

(5) We are entitled to make partial deliveries and to invoice these separately.

(6) The passing of risk takes place with delivery in accordance with § 5 sec. 2. Should the buyer fail to take delivery, the risk passes at the time the buyer fails to take delivery.

(7) In addition to our statutory rights we are entitled to suspend the performance of our obligations if there are reasonable indications that the buyer will not perform his obligations under the Contract of Sale, in particular not be able to pay the agreed price in due time.

§ 6 Delivery Note, Invoice and other documents

(1) We will provide the buyer with a delivery note issued according to our standard.

(2) Irrespective of the Incoterms-clause used, we are not obliged to clear the goods for export. We will however at the buyer's risk and expense apply for any necessary export licences and formalities as regards customs provided that the buyer has provided us with all necessary information.

(3) We will provide the buyer only with such documents explicitly stated on the Order Acknowledgement.

§ 7 Force Majeure

Any inability to supply as a result of force majeure or other unforeseen incidents outside our responsibility including, without limitation, strike, lock out, acts of public authorities, subsequent cease of export or import opportunities shall, for their duration and in accordance with their impact, relieve us from the obligation to comply with any agreed delivery period and delivery time as well as any other obligation.

§ 8 Obligation to pay the purchase price

(1) The buyer is obliged to pay the agreed purchase price to the bank account nominated by us. Insofar as pursuant to the Order Acknowledgement the packaging costs are not included in the purchase price, these costs are to be paid in addition to the purchase price. The place of payment is 34454 Bad Arolsen/Germany. Banking fees accrued outside of Germany will be borne by the buyer. The payment shall be made without any deductions and is due for payment on the date or within the time limit as stated on the Order Acknowledgement. A time limit for payment stated on the Order Acknowledgement shall be calculated from the date of invoice. In the absence of any payment dates or time limits stated on the Order Acknowledgement, payment shall be made within 30 (thirty) calendar days after date of invoice. The buyer's acceptance of the goods is no precondition for the payment to become due.

(2) The agreed prices shall exclude any statutory VAT applicable at the date of delivery.

(3) The buyer is only entitled to exercise a lien or to suspend his performance if this is based on the same transaction as well as based on a due and undisputed or finally adjudicated counterclaim of the buyer.

(4) The buyer may only offset any claims insofar as the buyer's counter-claim is acknowledged, undisputed or assessed in a legally binding judgement.

(5) If and till such time the buyer is in arrears with payment of the purchase price, the buyer is obliged to pay interest at the rate of nine (9) percentage points above the base rate of the German Central bank per annum.

§ 9 Non-Conforming goods; Goods with a defect in title

(1) The goods do not conform to the contract if at the time the risk passes they significantly deviate from the requirements set out in § 4 sec. 1 and sec. 2.

(2) The goods are not free from rights or claims of third parties if at the time the risk passes they significantly deviate from the requirements set out in § 4 sec. 3.

§ 10 Duty of examination and notification

(1) Without prejudice to the legal provisions, the buyer is obliged to examine the goods comprehensively in respect of deviations as regards type, quantity, quality and packaging. If necessary, the buyer is obliged to conduct the examination with the help of external third parties.

(2) Notice of non-conformity has to be made in within ten (10) calendar days. For very obvious non-conformities, the period for such notification starts with the delivery of the goods, in all other cases after the buyer has discovered the non-conformity or ought to have discovered it. Notice of non-conformity has to be given in writing. The notice of non-conformity has to clearly indicate and describe the non-conformity in such a way that we can take remedial actions.

(3) Apart from the aforesaid as well as with respect to defects in title, the statutory provisions apply.

§ 11 Limitation Period

Without prejudice to claims resulting from a malicious, grossly negligent or intentional conduct as well as claims due to injury of life, body or health, the buyer's claims in respect of the delivery of non-conforming goods and goods with a defect in title become time-barred one (1) year after delivery of the goods.

§ 12 Remedies in case of non-conforming goods and goods with a defect in title; Limitation of Liability

(1) In case of delivery of non-conforming goods, the buyer can claim delivery of substitute goods, rectification of a non-conformity by repair, reduce the purchase price or declare avoidance of the Contract of Sale only in accordance with the legal provisions. Delivery of substitute goods and rectification of a non-conformity by repair does not include the removal of the non-conforming goods nor the assembly of the repaired or of the substitute goods.

(2) To the extent any costs associated with performing remedies are increased by the fact that the buyer has removed the goods to a place not stated in the Order Acknowledgement or, in the absence of such an indication, to a place other than the buyer's place of business, these costs will be borne by the buyer.

(3) Delivery of substitute goods or repair does not lead to a restart or extension of the limitation period.

(4) If we deliver non-conforming goods or goods with a defect in title or breach any other obligation resulting from the Contract of Sale or the business relationship with the buyer, the buyer is entitled to demand damages only in accordance with the following provisions and any recourse to concurrent bases of claim (in particular of a non-contractual nature) is excluded:

a. We are not liable for the conduct of our suppliers or subcontractors. Neither are we liable for damages to which the buyer has contributed.

b. The buyer has to prove that either our directors or employees or other members of staff have deliberately or negligently breached contractual obligations owed to the buyer.

c. In case of liability, the amount of damages for late delivery is limited to 0,5 per cent for each full week of delay, up to a maximum of 5 per cent of the purchase price of the goods delivered late or not at all, and in case of remedies because of delivery of non-conforming goods and/or goods with a defect in title and in case of all other breaches of obligations is limited to the purchase price of the goods affected.

d. Irrespective of § 12 sec. 5 c), we are not liable for loss of profit.

e. The aforesaid limitations in § 12 sec. 5 do not apply

i. to injury of life, body or health,

ii. if we have acted maliciously, grossly negligent or intentionally,

iii. if we are liable according to mandatory product liability laws, and

iv. to liabilities which may not be excluded or limited according to the applicable laws.

(5) Apart from the aforesaid, the statutory provisions apply.

§ 13 Right to use Software; Rights in documents etc.

(1) In case the goods include software, with the delivery of the goods the buyer is hereby granted a non-exclusive, royalty-free license to use the software, but strictly and only in connection with the goods purchased under this Contract of Sale. With the exception of the right to make one backup copy, the buyer is not entitled to copy the software.

(2) We reserve all intellectual property rights in any documents, pictures, drawings etc. (collectively "Documents") arising in connection with the performance of the obligations arising under the Contract of Sale and such Documents shall belong exclusively to us.

§ 14 Other Provisions

(1) Title of the goods that have been delivered remains with us until all of our claims against the buyer have been settled.

(2) We are not obliged to perform any obligations not stated in the written Order Acknowledgement or in these International Terms and Conditions of Sale.

(3) There are no side agreements to the Contract of Sale.

(4) Any amendments to a concluded Contract of Sale require our written confirmation, duly approved by signature.

(5) The buyer is not entitled to assign his rights and obligations against us to a third party.

(6) The place of performance for delivery is governed in § 5 sec. 2, the place of per-formance for the payment in § 8 sec.1. For all remaining obligations and irrespective of the agreement of a differing Incoterms-clause, the place of performance is agreed to be 34454 Bad Arolsen/Germany, including for a replacement delivery, for the rectification of non-conformities and for the restitution of the contractual obligations in case of avoidance of the Contract.

(7) All communications, declarations, notices etc. (hereinafter collectively "Notices") are to be drawn up exclusively in German or English. Notices by means of fax or email fulfil the requirement of being in writing. A signature is not required, unless these International Terms and Conditions of Sale explicitly require a signature.

§ 15 Agreement on arbitration and jurisdiction

(1) If the Buyer's place of business is located within the European Economic Area and/or within Switzerland, for all disputes, including disputes under insolvency law, arising out of or in connection with a Contract of Sale and/or these International Terms and Conditions of Sale, including its validity, invalidity, violation or cancellation as well as other disputes arising out of the business relationship between the Buyer and us, the state court which has jurisdiction for 34454 Bad Arolsen/Germany shall have exclusive jurisdiction. Instead of bringing an action before the state court which has jurisdiction for 34454 Bad Arolsen/Germany, we are also entitled to bring an action before the state court of the Buyer's place of business.

(2) If the Buyer's place of business is located outside of both the European Economic Area and Switzerland, all contractual and extra-contractual disputes, including disputes under insolvency law, arising out of or in connection with a Contract of Sale and/or these International Terms and Conditions of Sale, including its validity, invalidity, violation or cancellation as well as other disputes arising out of the business relationship between the Buyer and us shall be finally settled in accordance with the Swiss Rules of International Arbitration of the Swiss Chambers' Arbitration Institution in force on the date on which the Notice of Arbitration is submitted in accordance with these Rules. The place of the arbitration shall be Zurich/Switzerland, the longuage used in the arbitral proceedings shall be English.

§ 16 Severability

If provisions of these International Terms and Conditions of Sale should be or become partly or wholly ineffective, the remaining provisions will continue to apply. We and the buyer are bound to replace the ineffective provision with a legally valid provision as close as possible to the commercial meaning and purpose of the ineffective provision.

HEWI

GERMANY
HEWI Heinrich Wilke GmbH
Postfach 1260
34442 Bad Arolsen
Phone: +49 5691 82-0
Fax: +49 5691 82-319
international@hewi.com

HEWI NORDIC APS
Industriholmen 21
2650 Hvidovre
Danmark
info@hewi.dk

UNITED KINGDOM
HEWI (UK) Limited
Holm Oak Barn, Beluncle Halt
Stoke Road, Hoo
Rochester, Kent ME3 9NT
Phone: +44 1634 258200
Fax: +44 1634 250099
info@hewi.co.uk
www.hewi.co.uk

USA
HEWI Inc.
350 Fifth Avenue
Suite 5220
New York, NY 10118
(917) 734-4112
www.hewi.us

www.hewi.com

Technical information subject to alteration. 10/26 PUSANNEWINT26