

EMERGENCY DRENCH SHOWER

PRODUCT CODE S1100

Date: March 2014

Vertically Mounted Emergency Shower, Plastic Shower Head

Model S1100 is a vertically mounted emergency shower with a plastic shower head and a 1" stay-open ball valve with a pull rod.

Standard Equipment:

Shower Head: Yellow, ABS plastic 190 mm diameter shower head with a 75 litres/minute flow regulator.

Valve: 1" rough chrome plated brass stay-open ball valve. Unit is provided with a stainless steel actuator arm and a 730 mm stainless steel pull rod.

Water Supply: 1" BSP female threaded brass inlet.


Universal Sign: ANSI compliant, vertical identification sign.

Weekly Test Tag: A water proof test card to record the date and inspector's name for weekly functional testing of the unit.

Compliances:

Test rating conditions are compliant to ANSI Z358.1-2009



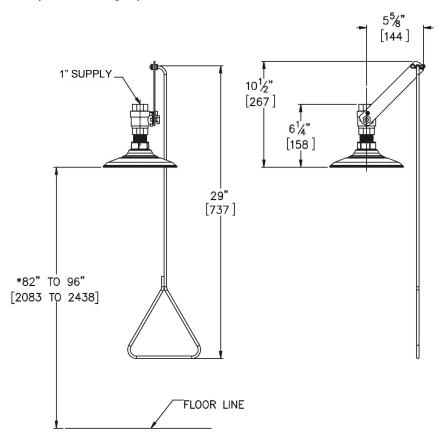

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. ANSI Z358.1 REQUIRES THE SHOWER HEAD TO BE MOUNTED BETWEEN 82"[2083] AND 96"[2438] ABOVE THE FLOOR.



5 Brearley Court Baird Road Waterwells Business Park Quedgeley Gloucester GL2 2AF
Tel: 01452 721211 Fax: 01452 721231

www.acornpowell.co.uk