

jupiter blue



ACCESS
PANELS



LOFT ACCESS
HATCHES



LOFT
LADDERS



ROOF
HATCHES

INNOVATION IN ACCESS

Our Mission:

We are a privately owned company producing and supplying Access Panels, Loft Hatches and associated products to the Private and Public Sectors of the Building Industry, through Distributors and Builders' Merchants.

Our Vision:

To be recognised as the leading first choice supplier of high quality Access Panels and Loft Access Hatches in the UK.

Our Values:

In our specialist area of work we place high value on:

- Fully meeting customers' needs
- Product quality and reliability
- Being cost effective
- Reducing lead times
- Innovation and product development
- Having clear lines of communication
- Behaving in an ethically responsible manner
- Reducing our carbon footprint and caring for the environment

In our chosen markets we excel at:

- Being competitive in the market place
- Packaging and distribution of products
- Delivering on time, correct and complete orders



INDEX

ACCESS PANELS	
Plastic Handi Access HA / HA-L	4
Shallow Metal PFS-SH / BFS-SH	5
Premium Metal PFS / BFS	6
Plasterboard Door BFS-Plast	7
Touch Latch Metal PFS-TL / BFS-TL	8
Fire Rated Metal PFFD / BFFD	9
Fire Rated Air Test Compliant PFFD-AT / BFFD-AT	10
Fire Rated Acoustic & Air Test Compliant PFFD-INS-40dB / BFFD-INS-40dB	11
Fire Rated Air Tested Compliant & Insulated Metal PFFD-INS-AT	12
Fire Rated Plasterboard Door BFFD-Plast	13
Concealed Tiled TILE-AP	14
Tile Kit TL-KT	15
Plastic Circular – Waterproof PCAP	16
Metal Circular – Ceiling SCAP / SCAPB	17
Exterior Air Test Compliant & Insulated Metal EAP-INS-AT	18
Exterior Economy Metal EAP - EPFS	19
LOFT HATCHES	
Air Test Compliant Part "L" AT35 / AT25 / AT15	20
Contemporary Part "L" Hinge Down PD35 / PD25 / PD15	21
Traditional Part "L" Hinge Down LT2 / LT235	22
Fire Rated Hinge Down SD	23
Fire Rated Push Up SP1 / SP2	24
LOFT LADDERS	
Domestic AL2 / AL3 / AL3C	25
Commercial AL4C	26
Commercial Hook On AL5C	27
Commercial Heavy Duty Concertina Zedfold	28
ROOF HATCHES	
Premium Aluminium SRHA	29
Galvanised Steel SRHS	30
Glazed GLRF	31
Economy ERHA	32
Smoke Vent AOV	33

Plastic Handi Access

HA + HA-L

KEY LOCK AVAILABLE



MADE IN
THE UK




KEY LOCKABLE
AVAILABLE



20dB

- Economical solution for walls or ceilings
- White injection moulded plastic access panel
- Guaranteed not to sag
- 20dB tested on largest 560x560
- UV stable high impact textured plastic, suitable for painting
- Standard HA snap friction or HA-L key lock option
- Hinged and removable door
- Anti-static treated

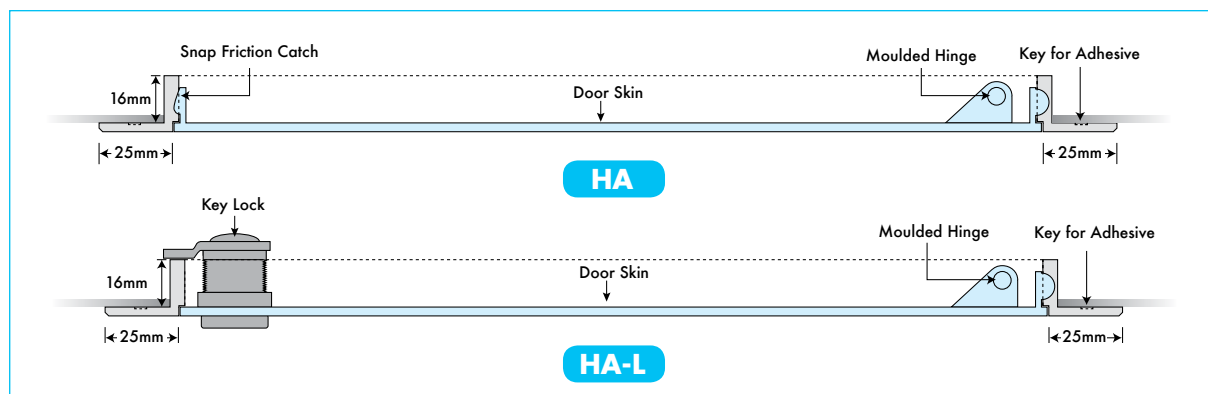

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
HA100-150*	100 x 150mm	105 x 155mm	91 x 140mm	16mm	0.11kg
HA150-150	150 x 150mm	155 x 155mm	120 x 140mm	16mm	0.18kg
HA150-230*	150 x 230mm	155 x 235mm	142 x 216mm	16mm	0.23kg
HA200-200	200 x 200mm	205 x 205mm	191 x 194mm	16mm	0.26kg
HA300-300	300 x 300mm	305 x 305mm	293 x 294mm	16mm	0.47kg
HA350-350	350 x 350mm	355 x 355mm	343 x 344mm	16mm	0.75kg
HA450-450	450 x 450mm	455 x 455mm	420 x 440mm	16mm	1.13kg
HA560-560	560 x 560mm	565 x 565mm	547 x 550mm	16mm	1.60kg

* Hinged long side


Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Shallow Metal

PFS-SH Picture Frame / BFS-SH Beaded Frame




MADE IN
THE UK



KEY LOCKABLE
AVAILABLE

- Economical 29mm deep white satin steel access panel (Ral 9010)
- Budget lock, with tamper-proof option "TP" or Keylock "L" options
- Bespoke sizes available
- Suitable for walls and ceilings
- Picture frame (PFS-SH) or beaded frame (BFS-SH) options
- 8 standard stock sizes

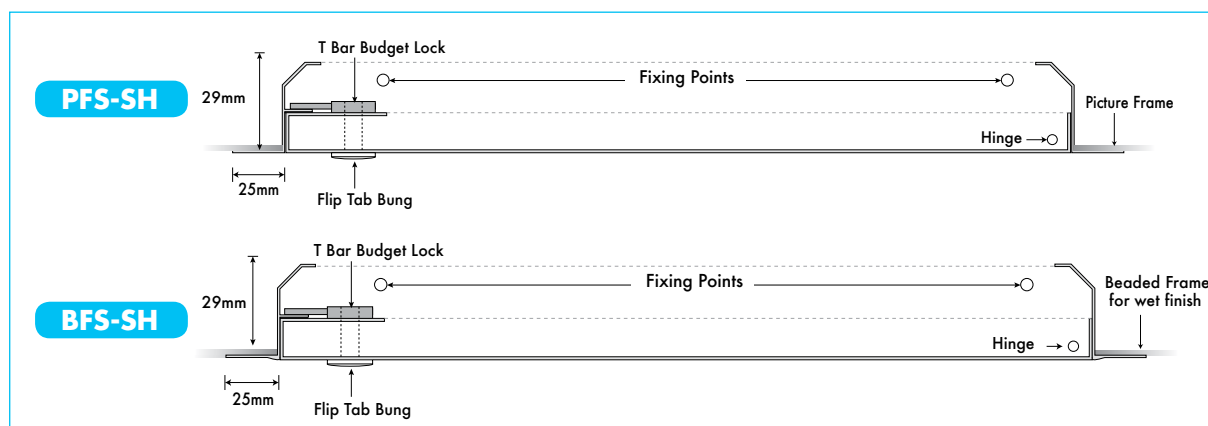

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFS-SH150 or BFS-SH150	150 x 150mm	155 x 155mm	98 x 147mm	29mm	0.7kg
PFS-SH200 or BFS-SH200	200 x 200mm	205 x 205mm	149 x 197mm	29mm	1.0kg
PFS-SH300 or BFS-SH300	300 x 300mm	305 x 305mm	250 x 298mm	29mm	1.5kg
PFS-SH350 or BFS-SH350	350 x 350mm	355 x 355mm	298 x 344mm	29mm	2.0kg
PFS-SH450 or BFS-SH450	450 x 450mm	455 x 455mm	398 x 444mm	29mm	2.8kg
PFS-SH550 or BFS-SH550	550 x 550mm	555 x 555mm	498 x 547mm	29mm	3.9kg
PFS-SH600x300 or BFS-SH600x300*	600 x 300mm	605 x 305mm	598 x 255mm	29mm	2.76kg
PFS-SH600 or BFS-SH600	600 x 600mm	605 x 605mm	547 x 598mm	29mm	4.5kg

* Hinged long side


Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk


www.jupiterblue.co.uk

Premium Metal

PFS Picture Frame / BFS Beaded Frame

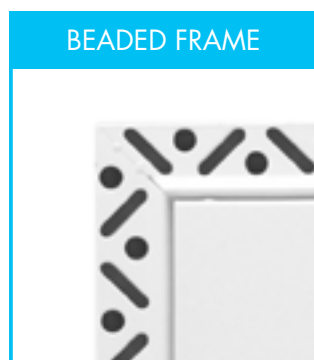

- Premier Lightweight, Panel in RAL 9010
- Tamper-proof lock option (postfix TP)
- Bespoke sizes available
- Suitable for Walls and Ceilings
- Picture Frame (PFS) or Beaded Frame (BFS) options
- 9 standard stock sizes available

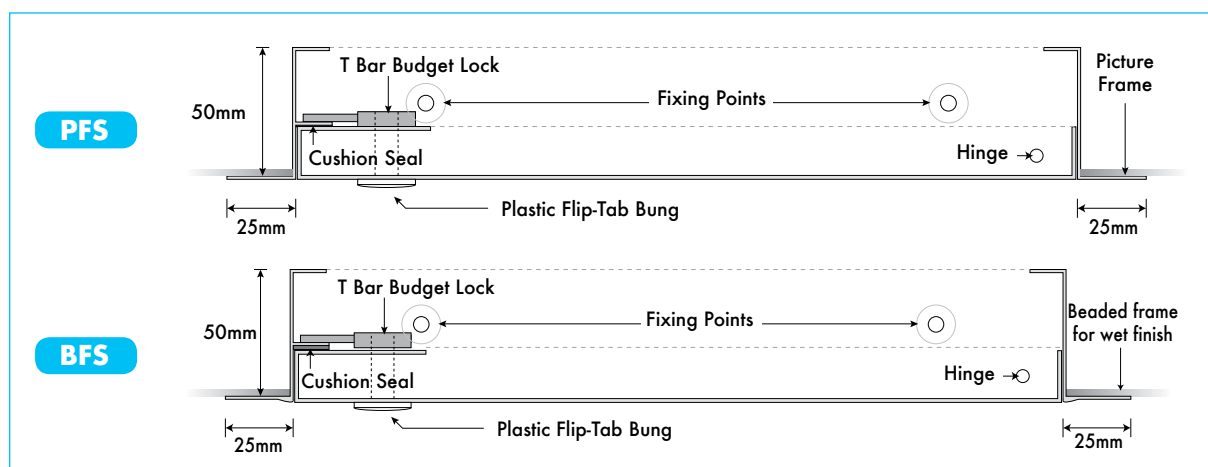

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFS150 or BFS150	150 x 150mm	155 x 155mm	110 x 120mm	50mm	1.0kg
PFS200 or BFS200	200 x 200mm	205 x 205mm	160 x 170mm	50mm	1.3kg
PFS300 or BFS300	300 x 300mm	305 x 305mm	260 x 270mm	50mm	2.2kg
PFS350 or BFS350	350 x 350mm	355 x 355mm	310 x 320mm	50mm	2.5kg
PFS450 or BFS450	450 x 450mm	455 x 455mm	410 x 420mm	50mm	3.5kg
PFS550 or BFS550	550 x 550mm	555 x 555mm	510 x 520mm	50mm	4.7kg
PFS600 or BFS600	600 x 600mm	605 x 605mm	535 x 560mm	50mm	5.4kg
PFS900-600 or BFS900-600*	900 x 600mm	905 x 605mm	856 x 520mm	50mm	7.9kg
PFS1200-600 or BFS1200-600*	1200 x 600mm	1205 x 605mm	1156 x 520mm	50mm	9.6kg

* Hinged long side

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Plasterboard Door

BFS-Plast Beaded Frame




MADE IN
THE UK



21dB

- Plasterboard door with beaded frame
- Gives a flush finish after tape and jointing both the door edge and outer frame
- Dual purpose for walls and ceilings
- Sliding pin hinges to easily remove door
- Threaded Steel Bung
- 21db reduction on acoustic test
- 7 Standard stock sizes with bespoke options

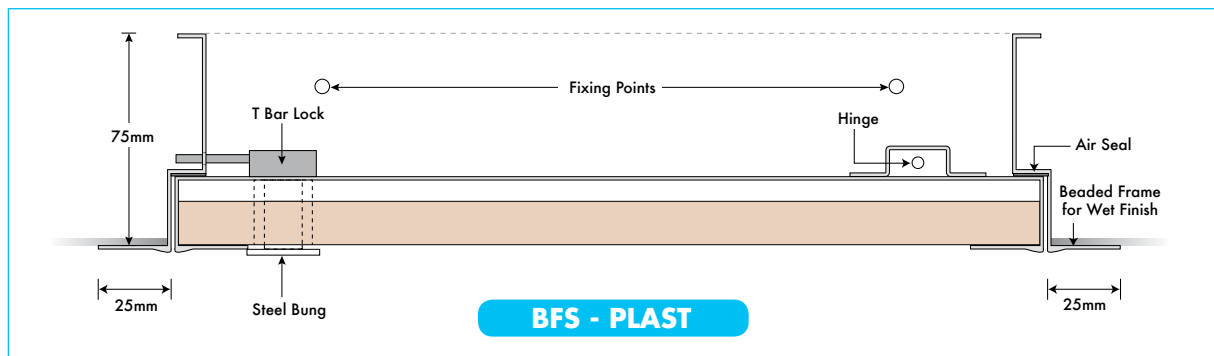

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
BFS-PLAST200	200 x 200mm	205 x 205mm	140 x 173mm	75mm	2.8kg
BFS-PLAST300	300 x 300mm	305 x 305mm	240 x 275mm	75mm	4.8kg
BFS-PLAST350	350 x 350mm	355 x 355mm	290 x 322mm	75mm	5.8kg
BFS-PLAST450	450 x 450mm	455 x 455mm	385 x 424mm	75mm	7.8kg
BFS-PLAST550	550 x 550mm	555 x 555mm	490 x 520mm	75mm	10.4kg
BFS-PLAST600	600 x 600mm	605 x 605mm	540 x 572mm	75mm	12.2kg
BFS-PLAST900-600*	900 x 600mm	905 x 605mm	842 x 540mm	75mm	19.9kg

* Hinged long side


Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk


www.jupiterblue.co.uk

Touch Latch Metal

PFS-TL Picture Frame or BFS-TL Beaded Frame




- Sleek, low profile access panel with no visible lock
- Fitted with 2 spring loaded roller catches
- Finished in white satin Ral 9010
- 7 Standard stock sizes
- Bespoke sizes available

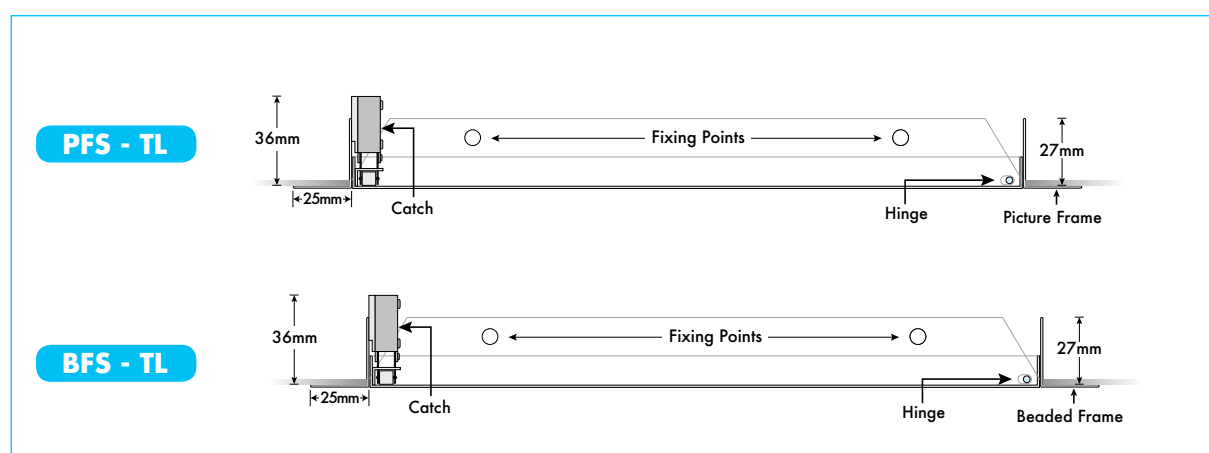

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFS-TL150 or BFS-TL150	150 x 150mm	155 x 155mm	100 x 148mm	27mm	0.5kg
PFS-TL200 or BFS-TL200	200 x 200mm	205 x 205mm	150 x 198mm	27mm	0.7kg
PFS-TL300 or BFS-TL300	300 x 300mm	305 x 305mm	250 x 298mm	27mm	1.3kg
PFS-TL350 or BFS-TL350	350 x 350mm	355 x 355mm	300 x 348mm	27mm	1.7kg
PFS-TL450 or BFS-TL450	450 x 450mm	455 x 455mm	400 x 448mm	27mm	2.6kg
PFS-TL550 or BFS-TL550	550 x 550mm	555 x 555mm	500 x 548mm	27mm	3.4kg
PFS-TL600 or BFS-TL600	600 x 600mm	605 x 605mm	550 x 598mm	27mm	3.8kg


Metal Door – 1 Hour Fire Rated

PFFD Picture Frame or BFFD Beaded Frame

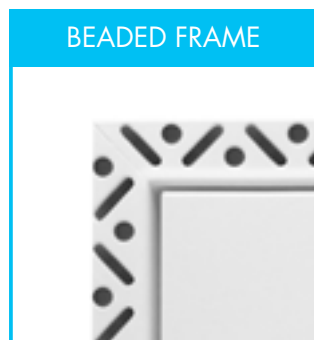MADE IN
THE UKFIRE
RATEDSMOKE
TESTED

34dB

- 1 Hour Fire Rated robust steel panel certified to BS EN 1634-1:2008 and BS EN 1364-2: 1999
- Smoke tested to BS EN 1634-3:2004
- UKAS Acoustic test to 34dB reduction
- Suitable for Walls and Ceilings
- Picture Frame (PFFD) or Beaded Frame (BFFD) options
- 9 Standard stock sizes available
- Powder coated white satin Ral 9010
- Tamper-proof lock (postfix TP) option

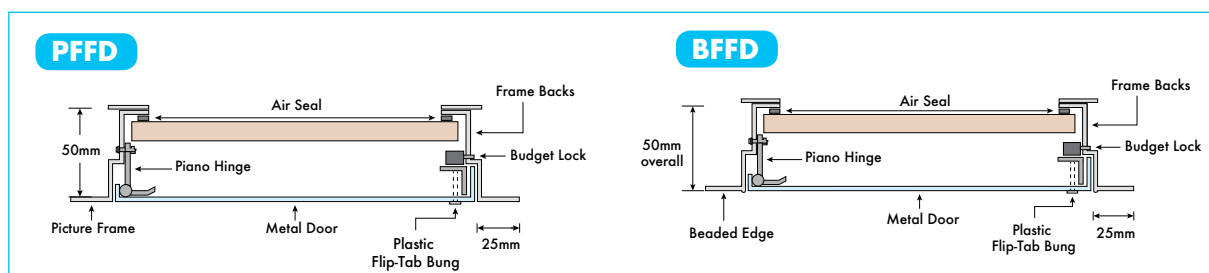

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD150 or BFFD150	150 x 150mm	155 x 155mm	75 x 80mm	50mm	2.6kg
PFFD200 or BFFD200	200 x 200mm	205 x 205mm	120 x 140mm	50mm	4.3kg
PFFD300 or BFFD300	300 x 300mm	305 x 305mm	220 x 264mm	50mm	5.6kg
PFFD350 or BFFD350	350 x 350mm	355 x 355mm	270 x 314mm	50mm	7.7kg
PFFD450 or BFFD450	450 x 450mm	455 x 455mm	370 x 412mm	50mm	10.6kg
PFFD550 or BFFD550	550 x 550mm	555 x 555mm	470 x 514mm	50mm	12.0kg
PFFD600-300 or BFFD600-300*	600 x 300mm	605 x 305mm	565 x 235mm	50mm	6.7kg
PFFD600 or BFFD600	600 x 600mm	605 x 605mm	520 x 564mm	50mm	16.9kg
PFFD900-600 or BFFD900-600*	900 x 600mm	905 x 605mm	865 x 520mm	50mm	17.8kg

*Hinged on long side


Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Air Test Compliant Door – 1 Hour Fire Rated

PFFD-AT Picture Frame or BFFD-AT Beaded Frame



MADE IN
THE UK



FIRE
RATED



SMOKE
TESTED



AIR
TESTED




36dB


- 1 Hour Fire Rated robust steel panel certified to BS EN 1634-1:2008 and BS EN 1364-2:1999
- Smoke tested to 1634-3:2004
- UKAS tested to 36dB acoustic reduction
- Tamper-proof lock (postfix TP) option

- Suitable for Walls and Ceilings
- Picture Frame (PFFD-AT) or Beaded Frame (BFFD-AT) options
- 9 Standard stock sizes available
- Powder coated white satin Ral 9010

PFFD-AT

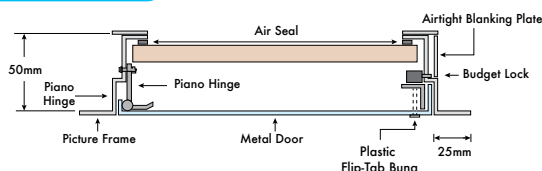

BFFD-AT

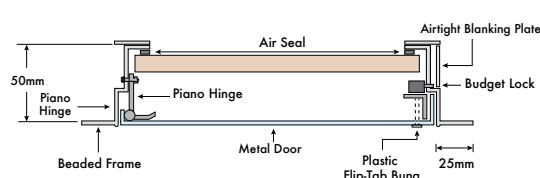


CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD-AT150 or BFFD-AT150	150 x 150mm	155 x 155mm	75 x 80mm	50mm	2.6kg
PFFD-AT200 or BFFD-AT200	200 x 200mm	205 x 205mm	120 x 140mm	50mm	4.3kg
PFFD-AT300 or BFFD-AT300	300 x 300mm	305 x 305mm	220 x 264mm	50mm	5.6kg
PFFD-AT350 or BFFD-AT350	350 x 350mm	355 x 355mm	270 x 314mm	50mm	7.7kg
PFFD-AT450 or BFFD-AT450	450 x 450mm	455 x 455mm	370 x 412mm	50mm	10.6kg
PFFD-AT550 or BFFD-AT550	550 x 550mm	555 x 555mm	470 x 514mm	50mm	12.0kg
PFFD-AT600-300 or BFFD-AT600-300*	600 x 300mm	605 x 305mm	565 x 235mm	50mm	7.4kg
PFFD-AT600 or BFFD-AT600	600 x 600mm	605 x 605mm	520 x 564mm	50mm	16.9kg
PFFD-AT900-600 or BFFD-AT900-600*	900 x 600mm	905 x 605mm	865 x 520mm	50mm	17.8kg

*Hinged on long side

Acoustic Door – 1 Hour Fire Rated & Air Test Compliant

PFFD-INS-40dB Picture Frame or BFFD-INS-40dB Beaded Frame

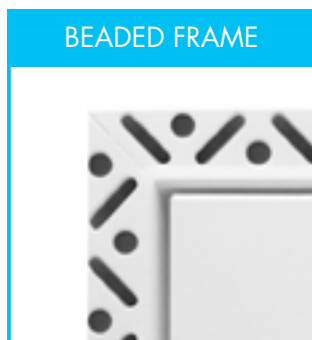

MADE IN THE UK



FIRE RATED



SMOKE TESTED



AIR TESTED




40dB


- 1 Hour Fire Rated robust steel panel certified to BS EN 1634-1:2008 and BS EN 1364-2: 1999
- Smoke tested to 1634-3:2004
- UKAS tested to 40dB acoustic reduction
- Air Test Compliant
- Suitable for Walls and Ceilings

- Picture Frame PFFD-INS-40dB or Beaded Frame BFFD-INS-40dB options
- 9 Standard stock sizes available
- Powder coated white satin Ral 9010
- 0.45 "U" value
- Tamper-proof lock (postfix TP) option

PFFD-INS-40db

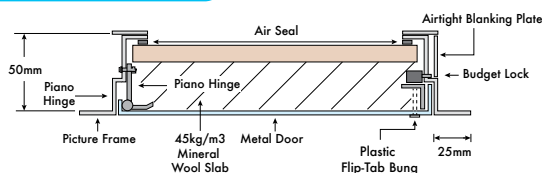

BFFD-INS-40db

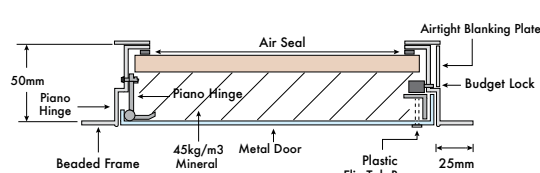

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD-INS-40dB150 or BFFD-INS-40dB150	150 x 150mm	155 x 155mm	75 x 80mm	50mm	2.6kg
PFFD-INS-40dB200 or BFFD-INS-40dB200	200 x 200mm	205 x 205mm	120 x 140mm	50mm	3.3kg
PFFD-INS-40dB300 or BFFD-INS-40dB300	300 x 300mm	305 x 305mm	220 x 264mm	50mm	4.8kg
PFFD-INS-40dB350 or BFFD-INS-40dB350	350 x 350mm	355 x 355mm	270 x 314mm	50mm	5.9kg
PFFD-INS-40dB450 or BFFD-INS-40dB450	450 x 450mm	455 x 455mm	370 x 412mm	50mm	8.6kg
PFFD-INS-40dB550 or BFFD-INS-40dB550	550 x 550mm	555 x 555mm	470 x 514mm	50mm	11.2kg
PFFD-INS-40dB600-300 or BFFD-INS-40dB600-300*	600 x 300mm	605 x 305mm	565 x 235mm	50mm	8.1kg
PFFD-INS-40dB600 or BFFD-INS-40dB600	600 x 600mm	605 x 605mm	520 x 564mm	50mm	13.4kg
PFFD-INS-40dB900-600 or BFFD-INS-40dB900-600*	600 x 900mm	905 x 605mm	865 x 520mm	50mm	17.8kg

*Hinged on long side

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Metal Door – 1 Hour Fire Rated

PFFD-INS-AT (Insulated & Air Test Compliant)



MADE IN THE UK



FIRE RATED



KEY LOCKABLE AVAILABLE



SMOKE TESTED




AIR TESTED



36dB

- Picture Frame 1 Hour Fire Rated, Tested to BS EN 1634-1:2008 and BS EN 1364-2: 1999 in white satin Ral 9010
- Air test compliant in a UKAS accredited test house
- Smoke tested to 1634-3:2004

- Insulated to (Part "L") with exposed fire proof mineral wool
- Fitted with an airtight tri-drive lock as standard or a secure key lock (postfix L)
- UKAS Acoustic Test to 36dB reduction
- 7 Standard Stock Sizes with bespoke sizes to order

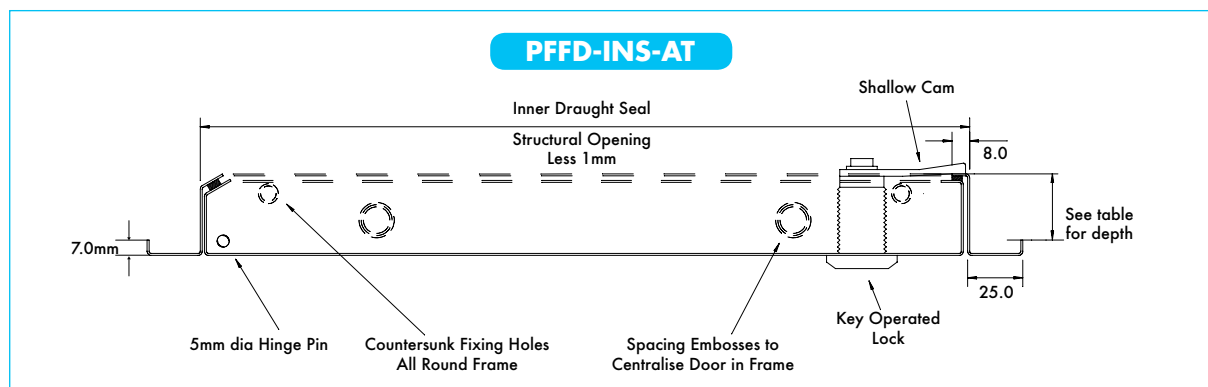

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PFFD-INS-AT150	150 x 150mm	155 x 155mm	130 x 105mm	33mm	1.9kg
PFFD-INS-AT200	200 x 200mm	205 x 205mm	180 x 155mm	33mm	2.2kg
PFFD-INS-AT300	300 x 300mm	305 x 305mm	280 x 255mm	33mm	2.9kg
PFFD-INS-AT350	350 x 350mm	355 x 355mm	330 x 305mm	33mm	3.2kg
PFFD-INS-AT450	450 x 450mm	455 x 455mm	430 x 375mm	63mm	4.3kg
PFFD-INS-AT550	550 x 550mm	555 x 555mm	530 x 475mm	63mm	5.5kg
PFFD-INS-AT600	600 x 600mm	605 x 605mm	580 x 525mm	63mm	5.9kg

*Postfix L for key lockable version e.g. PFFD-INS-AT150L

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Plasterboard Door – 1 Hour Fire Rated

BFFD-Plast Beaded Frame



MADE IN THE UK




FIRE RATED



21 dB

- Plasterboard door and beaded frame for uncompromisingly discreet aesthetics
- Flush finish when taped and jointed
- 1Hr fire rated to BS EN 1364-2 and 1634-1
- 7 Standard stock sizes with bespoke sizes to order
- Sliding pin hinges, removable door, threaded metal bung to conceal budget lock
- 21 dB reduction on acoustic test

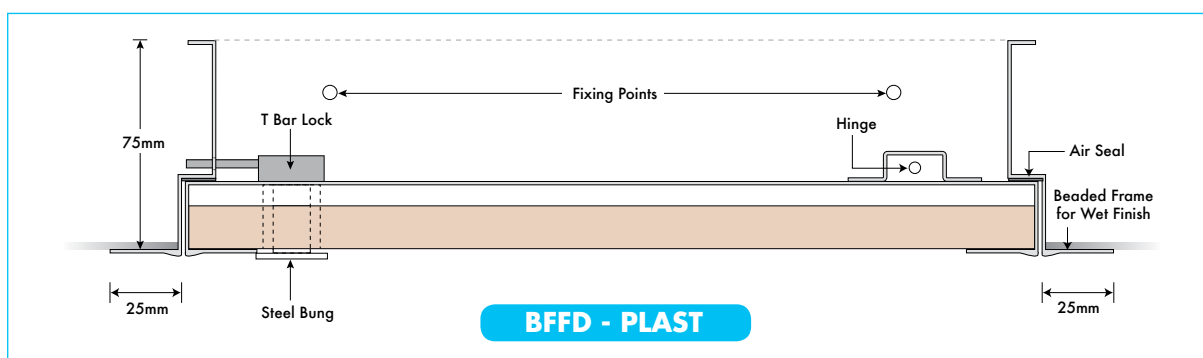

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
BFFD-PLAST200	200 x 200mm	205 x 205mm	140 x 173mm	75mm	2.8kg
BFFD-PLAST300	300 x 300mm	305 x 305mm	240 x 275mm	75mm	4.8kg
BFFD-PLAST350	350 x 350mm	355 x 355mm	290 x 322mm	75mm	5.8kg
BFFD-PLAST450	450 x 450mm	455 x 455mm	385 x 424mm	75mm	7.8kg
BFFD-PLAST550	550 x 550mm	555 x 555mm	490 x 520mm	75mm	10.4kg
BFFD-PLAST600	600 x 600mm	605 x 605mm	540 x 572mm	75mm	12.2kg
BFFD-PLAST900-600*	900 x 600mm	905 x 605mm	842 x 540mm	75mm	19.9kg

*Hinged on long side

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Concealed Tiled Access Panel

TILE-AP



Open



Closed



MADE IN
THE UK



KEY LOCKABLE
AVAILABLE

- Tile door access panels are designed to give access to building services behind tiled walls
- Made to measure to suit tiles up to 10mm thick.
- A bespoke item, custom made to suit the tile module up to a maximum of 600x600mm
- Please note the hinge has pivot on the bottom edge (see the image below)
- Lift out with concealed twin touch catches to open/close
- Includes an internally top mounted quick release safety cord
- Made from Zintec steel and moisture resistant back board
- A concealed frame installed before tiling. Totally invisible when fitted
- Fire rated or non-fire rated available
- The Tile-AP door is also available with additional **visible** locking options – Budget Lock (Tile-AP-BL), Tamper-Proof (Tile-AP-TP) or Key lock (Tile-AP-KL)

What information we need to produce your panel

Tile size, layout and grout width

IMPORTANT INFORMATION




Hinged
Short side



Hinged
Long side

All lift off tile panels pivot at the base

WHAT WE NEED TO KNOW

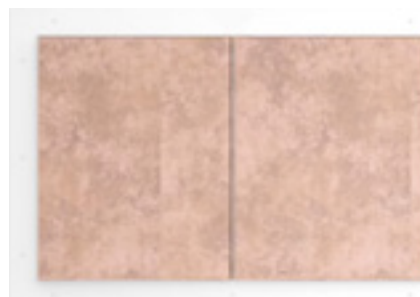


Simply provide

1. Tile Size (600x600 max) 2. Layout 3. Grout Width

Tile Kit

TL-KT

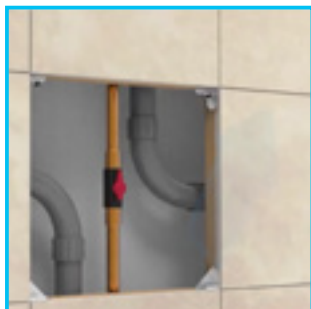


The revolutionary new kit for a single tile, solves the problem of access through grouted tiles, without detracting from the finish of the tiled area.

Blending seamlessly into the tile surfaces, providing an opening to concealed building & plumbing services.

The popularity for expansive tiled areas in modern bathrooms, kitchens and utility rooms has grown and we offer the perfect kit solution for single tiles.

The TL-KT Access Panel Kit is easy to fit by following the instructions or video (see website). The door operates on slotted hinges and twin touch latches. The door is fully removable for a larger clear access to services.

- Matching finish, concealed panel
- Uses tile to create the hidden door
- Twin magnetic sprung touch release
- Suit for all size doors from 130mm up to 600mm
- Maximum tile weight of 4.5kg
- Cost effective solution for access
- GB1712149.2 patent number
- Bottom hinge side only

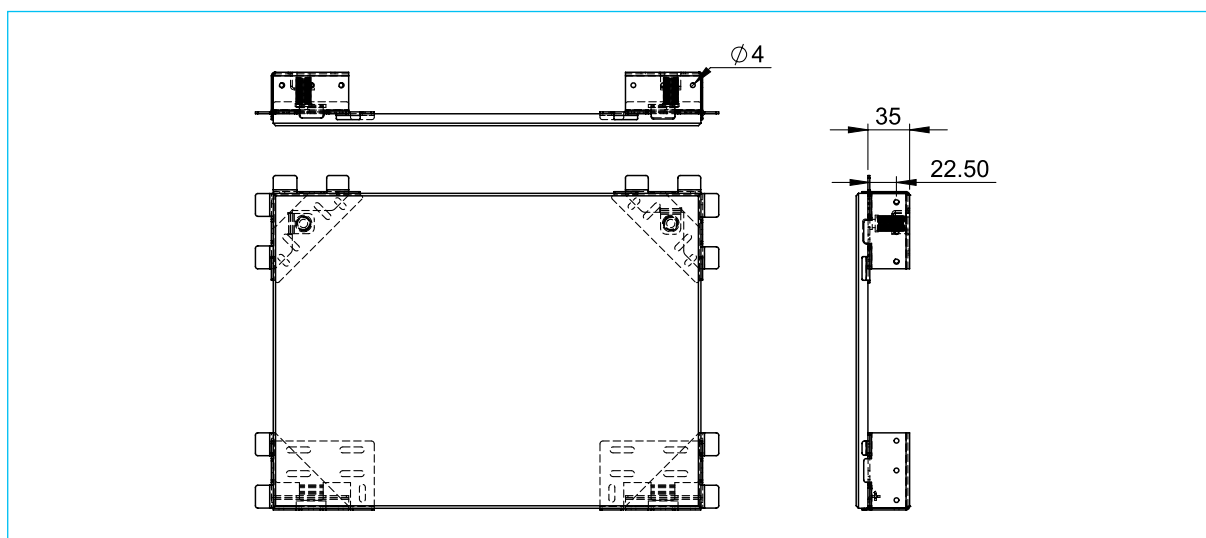

Waterproof Plastic Circular

PCAP




WATER
PROOF



AIR
TIGHT

- Waterproof "O" ring design
- White polypropylene semi-gloss finish
- 6 concealed fixings*
- Twist action open/close
- Fine thread for a high compression
- Easy to install

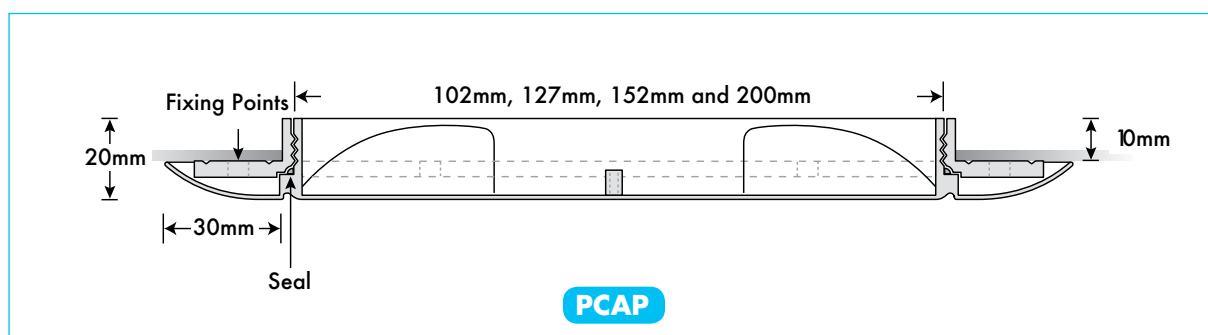

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
PCAP102	Ø102mm	Ø115mm	Ø102mm	10mm	0.1kg
PCAP127	Ø127mm	Ø140mm	Ø127mm	10mm	0.2 kg
PCAP152	Ø152mm	Ø166mm	Ø152mm	10mm	0.2kg
PCAP200	Ø200mm	Ø213mm	Ø200mm	10mm	0.4kg

* PCAP 200 has visible fixings Ø = Diameter

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Metal Circular – Ceiling Use Only


SCAP Picture Frame or SCAPB Beaded Frame



BEADED VERSION



- Contemporary aesthetics with concealed fixings
- Supplied with “hook-on” safety cable
- Simply rotate to open/close on slots and bayonet pins
- Prefinished in satin RAL 9010 with 20% gloss

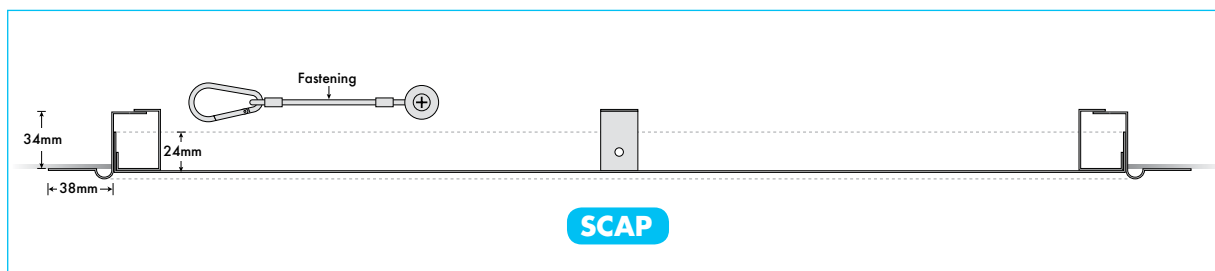

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
SCAP150 or SCAPB150	Ø150mm	155mm	120mm	35mm	0.2kg
SCAP200 or SCAPB200	Ø200mm	205mm	170mm	35mm	0.4kg
SCAP300 or SCAPB300	Ø300mm	305mm	270mm	35mm	0.7kg
SCAP450 or SCAPB450	Ø450mm	455mm	415mm	35mm	2.2kg
SCAP600 or SCAPB600	Ø600mm	605mm	555mm	35mm	3.4kg

Exterior Door – Insulated & Air Test Compliant

EAP-INS-AT (External Access Panel)



MADE IN
THE UK



SMOKE TESTED




KEY LOCKABLE



36dB

- Picture Frame in white satin Ral 9010
- Air tested in a UKAS accredited test house
- Smoke tested to BS EN 1634-3:2004
- Suitable for walls or ceilings
- Insulated to Part "L"
- Fitted with an airtight secure key
- 36dB reduction sound tested
- 3 Standard Stock Sizes with bespoke sizes to order

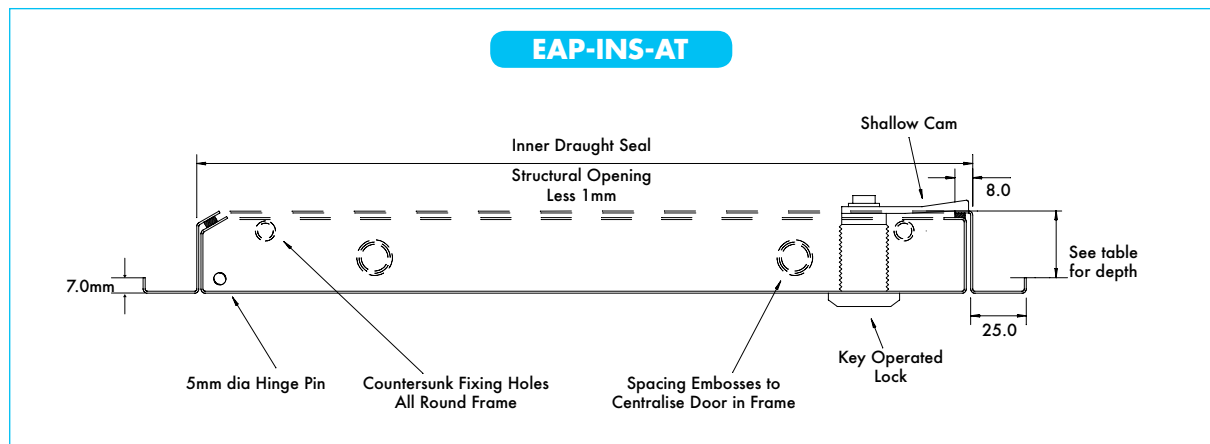

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
EAP-INS-AT300	300 x 300mm	305 x 305mm	280 x 255mm	33mm	2.9kg
EAP-INS-AT450	450 x 450mm	455 x 455mm	430 x 375mm	63mm	4.3kg
EAP-INS-AT600	600 x 600mm	605 x 605mm	580 x 525mm	63mm	5.9kg

Exterior Economy Metal

EAP - EPFS Picture Frame




MADE IN
THE UK



KEY LOCKABLE
AVAILABLE

- Neat, shallow profile Access Panel for an attractive finish
- Marine Powder coated in white satin RAL 9010
- Removable door
- Available in 3 standard sizes
- Made to measure option
- Keylock only

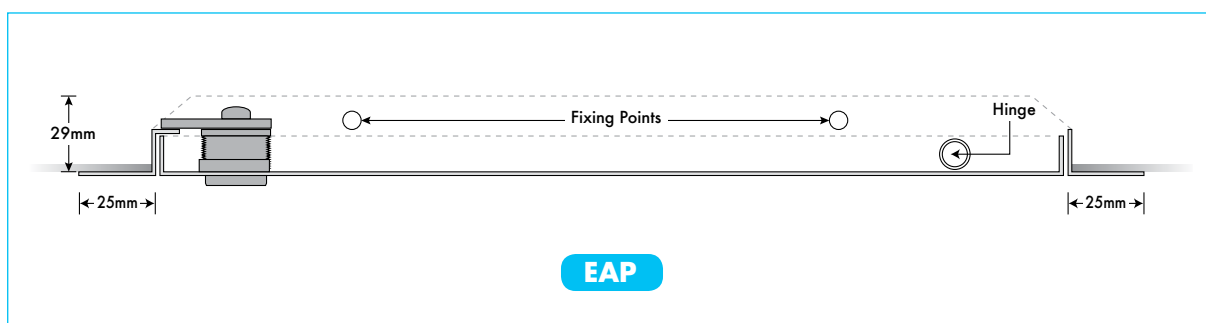

CODE	PANEL SIZE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	DEPTH	WEIGHT
EAP – EPFS300	300 x 300mm	305 x 305mm	250 x 298mm	29mm	1.3kg
EAP – EPFS450	450 x 450mm	455 x 455mm	400 x 448mm	29mm	2.6kg
EAP – EPFS600	600 x 600mm	605 x 605mm	550 x 598mm	29mm	3.8kg

Air Test Compliant Part "L" Hinge down

AT35/AT25/AT15



MADE IN THE UK



KEY LOCKABLE AVAILABLE




AIR TESTED

KEY LOCK AVAILABLE



Patent Application
No.1407745.7

- Airtest compliant at 50Pa of positive or negative air pressure
- GWP and ODP rating of zero
- Exceeds NHBC requirements
- Spring loaded "easy to open" high compression catch
- Inner & outer neoprene memory draught seals
- Invisible pre-fitted hinges for a quick easy installation
- Robust long lasting zintec steel design
- Smooth white satin powder coated in RAL 9010
- Slim frame for contemporary unobtrusive aesthetics
- Projects into the ceiling space a mere 2mm
- Air seals without the use of sealant or caulking
- Three models exceeding Part "L"

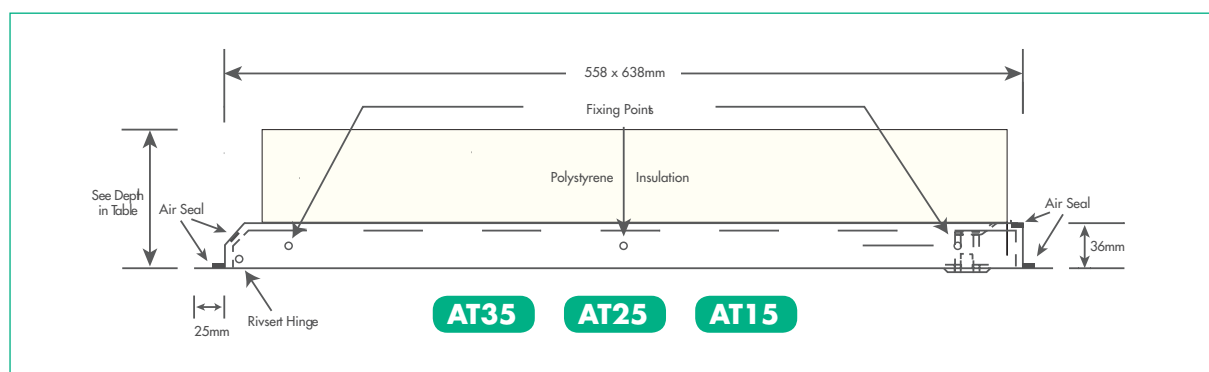

CODE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	"U" VALUE	DEPTH	WEIGHT
AT35	560 x 640mm	520 x 560mm	0.35	60mm	4.5kg
AT25	560 x 640mm	520 x 538mm	0.25	100mm	4.8kg
AT15	560 x 640mm	520 x 538mm	0.15	100mm	5.4kg

*Postfix L for key lockable version e.g. AT35L

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Contemporary Part "L" Hinge down

PD35 / PD25 / PD15



MADE IN THE UK



KEY LOCKABLE AVAILABLE




AIR TESTED

KEY LOCK AVAILABLE



- Three models meeting or exceeding Part "L"
- The flushest fitting plastic loft hatch on the market
- A GWP and ODP rating of zero
- Exceeds NHBC requirements
- Air tested in UKAS accredited test house
- Features a concealed inner and outer frame seal
- High impact white styrenic plastic
- UV stable smooth satin finish

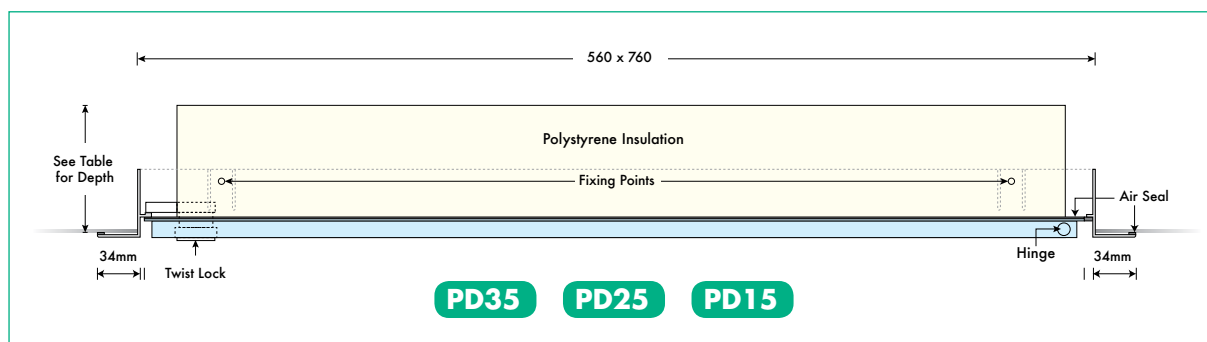

CODE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	"U" VALUE	DEPTH	WEIGHT
PD35	562 x 762mm	533 x 670mm	0.35	55mm	2.8kg
PD25	562 x 762mm	533 x 630mm	0.25	100mm	3.2kg
PD15	562 x 762mm	533 x 580mm	0.15	150mm	3.1kg

*Postfix L for key lockable version e.g. PD25L

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Traditional Part "L" Hinge down


LT2 Hinge down



MADE IN
THE UK



- A GWP and ODP rating of zero
- Exceeds NHBC requirements
- High impact white styrenic plastic
- UV stable smooth satin finish
- Decorative Frame
- Traditional design

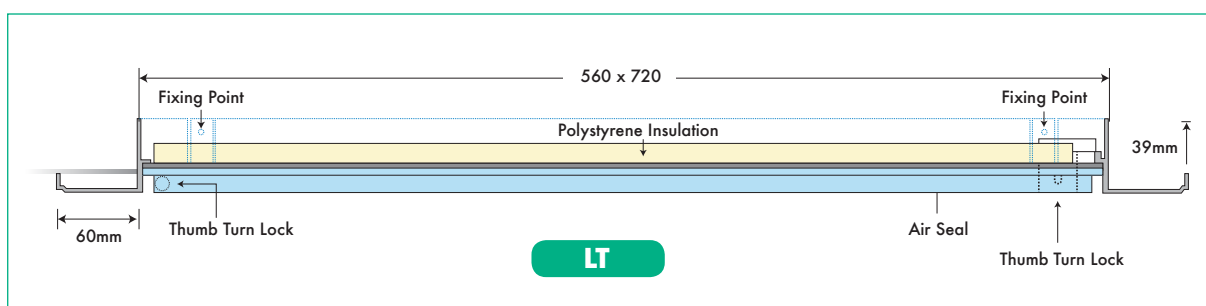

CODE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	"U" VALUE	DEPTH	WEIGHT
LT2	562 x 722mm	533 x 655mm	0.78	35mm	2.9kg
LT235*	562 x 722mm	533 x 590mm	0.35	55mm	3.1kg

* Meets Part L

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF
T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Fire Rated Hinge Down

SD 1 Hour Fire Rated



MADE IN
THE UK



FIRE
RATED



AIR
TESTED



SMOKE TESTED




36dB



KEY LOCKABLE
AVAILABLE

- 1 HR Fire rated, tested to BS EN 1364-2:1999
- Exceeds Part "L" and NHBC requirements
- Smoke tested to BS EN 1634-3:2004
- Air tested in UKAS accredited test house
- Powder Coated in white satin (Ral 9010)
- UKAS Acoustic Test to 36dB reduction
- Picture frame only
- Keylock version available Postfix "L" e.g. SDL
- Bespoke SDS options to order

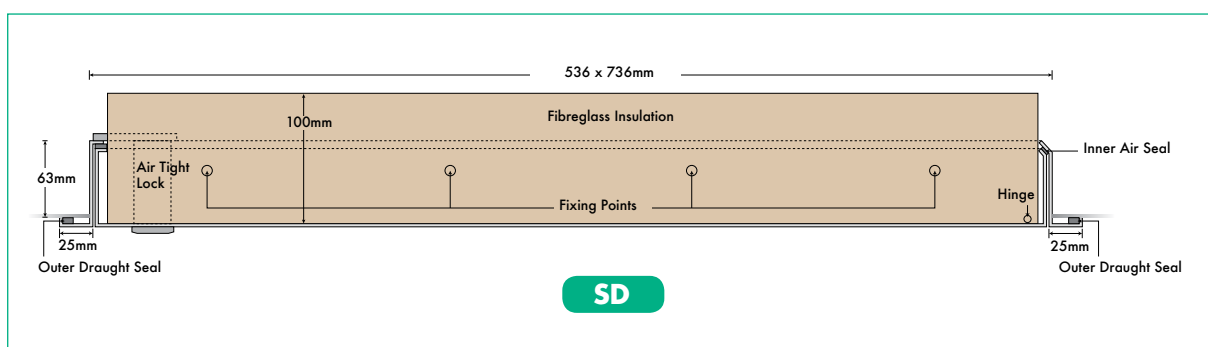

CODE	STRUCTURAL OPENING	CLEAR OPENING ONCE INSTALLED	"U" VALUE	DEPTH	WEIGHT
SD	555 x 755mm	520 x 630mm	0.35	75mm	8.5kg
SD550	555 x 555mm	475 x 530mm	0.35	63mm	6.4kg
SD600	605 x 605mm	525 x 580mm	0.35	63mm	7.1 kg
SDX	605 x 905mm	525 x 820mm	0.35	63mm	9.7kg

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Fire Rated Push up

SP1/ SP2 1 Hour Fire Rated



MADE IN
THE UK




FIRE
RATED



AIR
TESTED

- 1 HR Fire rated to BS EN 1364-2:1999
- Exceeds Part "L" and NHBC requirements
- Economical solution to fire rated loft hatch scenarios
- Simple push up non-hinge hatch
- Air tested in UKAS accredited test house
- GWP and ODP rating of zero
- Powder coated in white satin Ral 9010
- Bespoke sizes available (SP3)

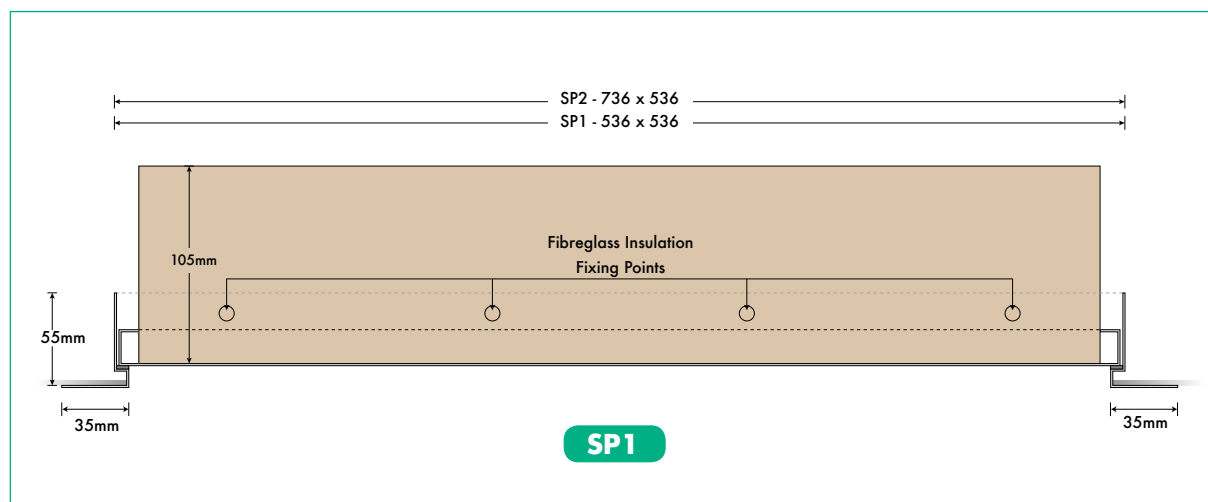

CODE	CEILING CUT OUT	CLEAR OPENING	"U" VALUE	DEPTH	WEIGHT
SP1	555 x 555mm	520 x 520mm	0.32	100mm	4.5kg
SP2	755 x 555mm	712 x 520mm	0.32	100mm	6.1kg

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Domestic Loft Ladder

AL2 / AL3 / AL3C



AL2

- EN 14975 Aluminium 2 Section Loft Ladder



- Suitable for heights up to 2.69m
- Wide non-slip 'D' shape rungs for comfort and safety
- Smooth and easy opening
- Suitable for DIY installation
- Includes easy to follow instructions
- Suitable for domestic use only

AL3

- EN 14975 Aluminium 3 Section Loft Ladder



- Suitable for heights up to 3m
- Wide non-slip 'D' shape rungs for comfort and safety
- Handrail for added safety
- Smooth and easy opening
- Suitable for DIY installation
- Includes easy to follow instructions
- Suitable for domestic use only

AL3C

- EN 14975 Medium Duty 3 Section Loft Ladder





- Suitable for heights up to 3m
- 'Easy Stow' system with counter balanced operation
- Handrail for added safety
- Suitable for DIY installation
- Includes easy to follow instructions
- Suitable for domestic and medium duty use only

CODE	SECTIONS	HANDRAIL	MAX FLOOR TO LOFT FLOOR HEIGHT	MIN LOFT OPENING SIZE WIDTH	MIN CLEARANCE ARC	MIN STORAGE SPACE
AL2	2	0	2.69m	0.38m	0.71m	1.27m
AL3	3	1	3.00m	0.38m	0.71m	1.12m
AL3C	3	1	3.00m	0.38m	0.71m	1.12m

Commercial Loft Ladder

AL4C with Assisted Operation up to 5m

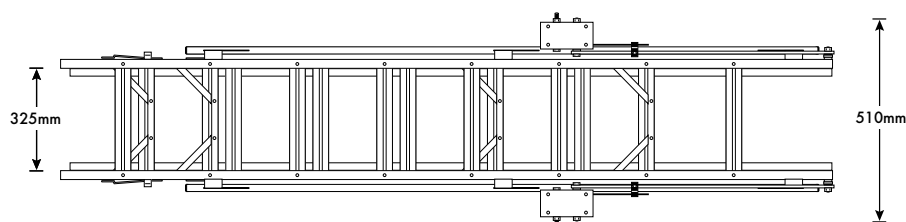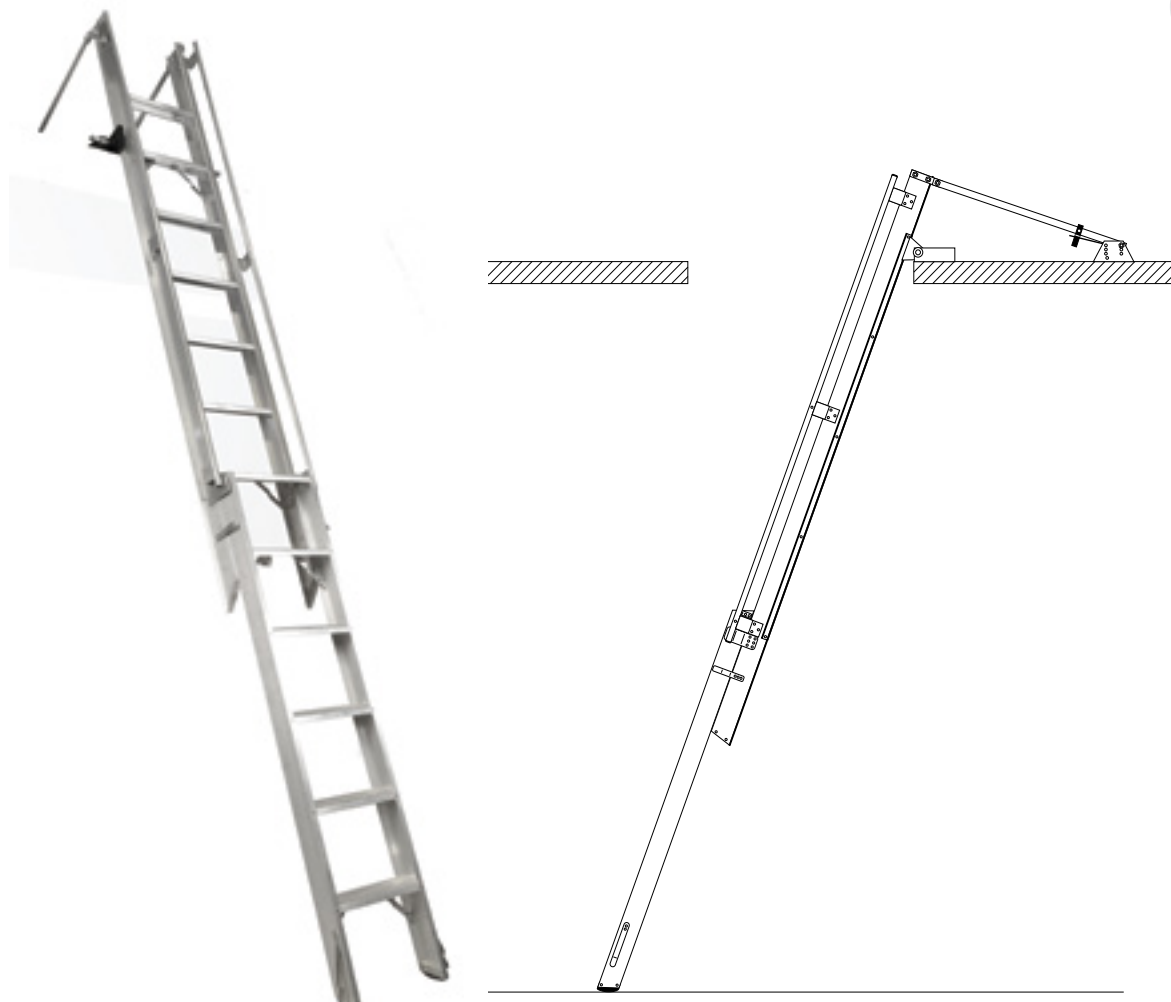


- Any length up to 5m
- Made to order
- 75mm or 100mm tread depth
- Twin full height hand rails
- Double section
- Assisted operation with balance spring assembly
- Manufactured to BSEN14975:2006
- Stores horizontally in loft space

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF
T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Commercial Hook On

AL5C Loft Ladder up to 5m

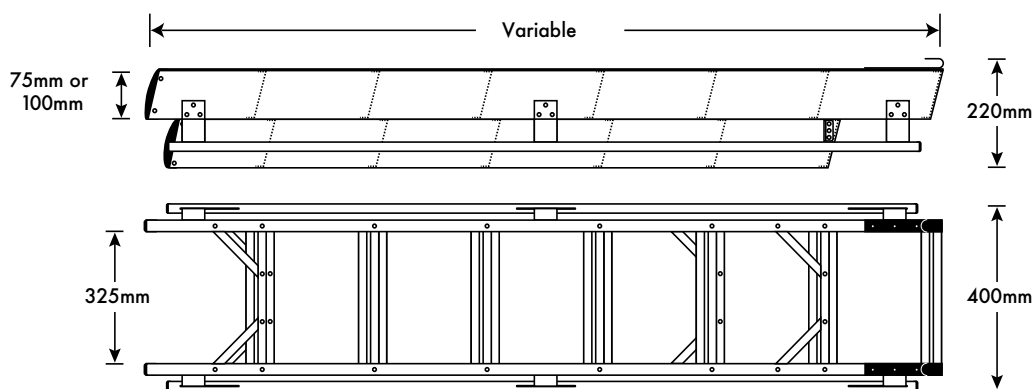


- Any length up to 5m
- Made to order
- 75mm or 100mm tread depth
- Twin full height hand rails
- Double section
- Manufactured to BSEN14975:2006

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF
T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Commercial Heavy Duty Roof/Loft Access Ladder

ZEDFOLD

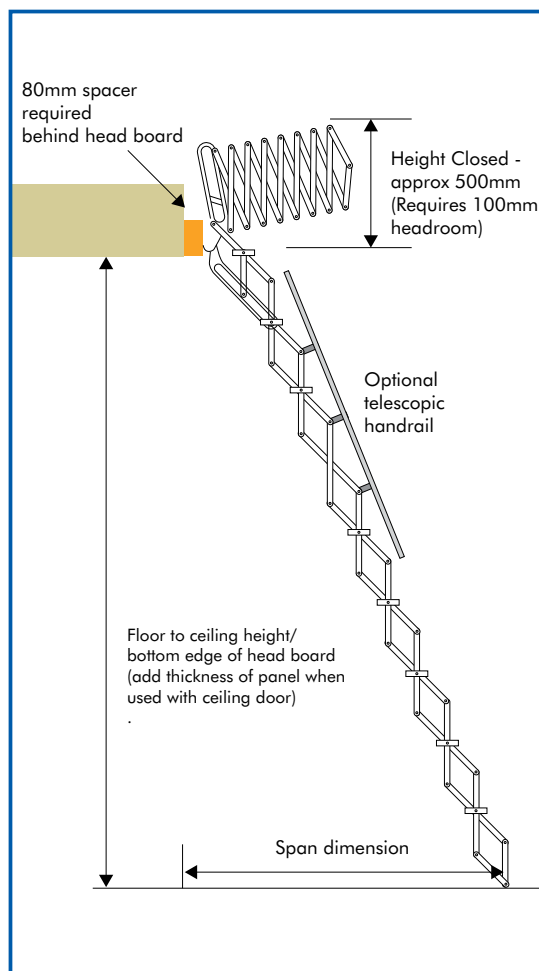

- Conforms to DIN 4570 with a load bearing capacity of 200kgs
- Manufactured from high strength die-cast aluminium alloy components.
- 350mm standard width with 300mm width option to order
- Antislip 140mm deep treads
- Counterbalanced for light weight operation
- Optional telescopic handrail(s) available
- Operating pole supplied
- Head board 600 x 200mm

MODEL	CEILING HEIGHT	CLEAR OPENING (WIDTH & LENGTH)	SPAN DIMENSION	WEIGHT (KG)
Zedfold 9 Tread	UP to 2500mm	600 x 700mm	1210 - 1310mm	28
Zedfold 10 Tread	2501 - 2790mm	600 x 750mm	1310 - 1410mm	30
Zedfold 11 Tread	2791 - 3090mm	600 x 850mm	1410 - 1510mm	32
Zedfold 12 Tread	3091 - 3390mm	600 x 900mm	1510 - 1610mm	34

Premium Aluminium

SRHA

**GAS STRUT
WITH LOCK OUT**





- Construction and Finishes:
3mm Aluminium (Mill Finish),
- Internal Cab lock and external
push button lock
- Fitted with internal and external
Padlock loops
- Twin gas struts assist opening,
one automatically locks open
when fully extended
- Supports a live load of 200Kg per m2
- 0.43 'U' Value
- GWP less than 3 and ODP of 0



Internal clear opening dimensions


600 x 600mm
600 x 900mm Hinged Short Side
750 x 750mm
750 x 900mm Hinged Short Side
900 x 900mm
1000 x 1000mm
1350 x 750mm Hinged Long Side
Bespoke sizes available to order

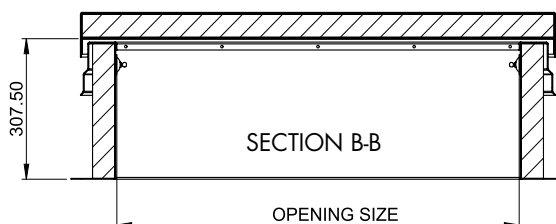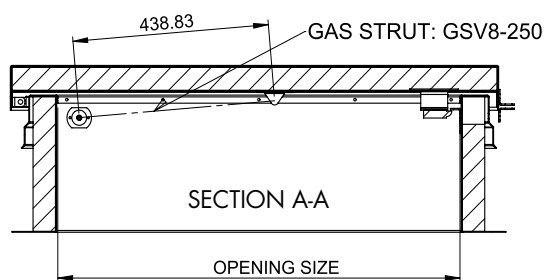

Galvanised Steel

SRHS

GAS STRUT
WITH LOCK OUT

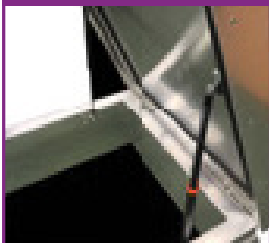



INTERNAL CAB LOCK



- Internal Cab lock and external push button lock
- Fitted with internal and external Padlock loops
- Twin gas struts assist opening, one automatically locks open when fully extended
- Supports a live load of 200Kg per m2
- 0.43 'U' Value
- GWP less than 3 and ODP of 0
- Construction and Finishes: 2mm Zintec Steel (Primed), 2mm Zintec Steel (Powder-coated), 2mm Stainless Steel (Grade 316 Marine)

Internal clear opening dimensions

600 x 600mm
600 x 900mm Hinged Short Side
750 x 750mm
750 x 900mm Hinged Short Side
900 x 900mm
1000 x 1000mm
1350 x 750mm Hinged Long Side
Bespoke sizes available to order

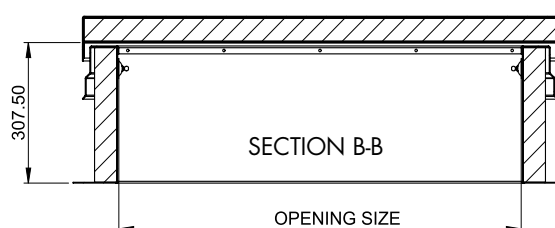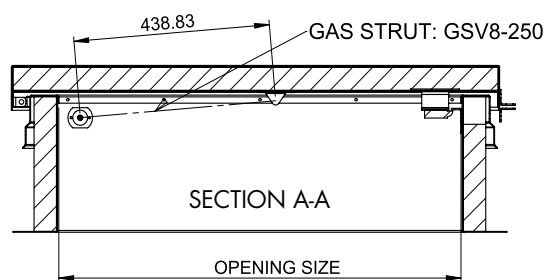


Glazed

GLRF



GLRF WITH VERTICAL KERB

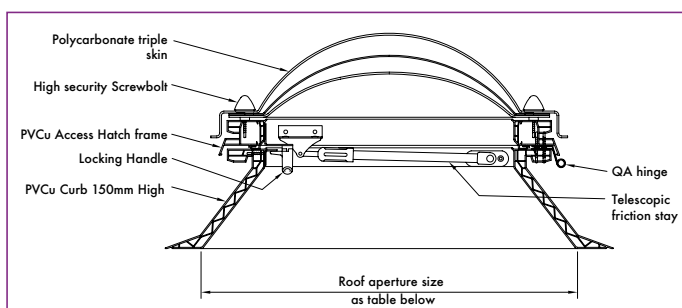

- Triple skin polycarbonate glazed roof access
- Compliant with HSG33 recommendations
- Sleek, contemporary design with gas struts or friction stays to facilitate a controlled 90° opening
- Rigid uPVC frame with high security fixings
- Impact strength of up to 250 times greater than glass
- "U" value of 1.8, with a light transmission of 78% on clear and 32% on opal polycarbonate
- Hard body impact testing according to NBN EN 13964:2007
- BBA Certificate No. 00/4691 and are manufactured to ISO 9001
- Manufactured in accordance with European standards and hold a CE mark according to EN 1873
- Tapered uPVC 150mm high (or 300mm to order) kerb
- Vertical kerbs for a larger clear opening available if required
- Remote electric operation opening and AOV units are also available (see page 33)

Internal clear opening dimensions

700 x 700mm	1000 x 1000mm	600 x 1200mm
750 x 750mm	1100 x 1100mm	700 x 1000mm
800 x 800mm	1200 x 1200mm	700 x 1300mm
900 x 900mm	1250 x 1250mm	800 x 1100mm
950 x 950mm	600 x 900mm	900 x 1200mm


Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk


www.jupiterblue.co.uk

Economy

ERHA

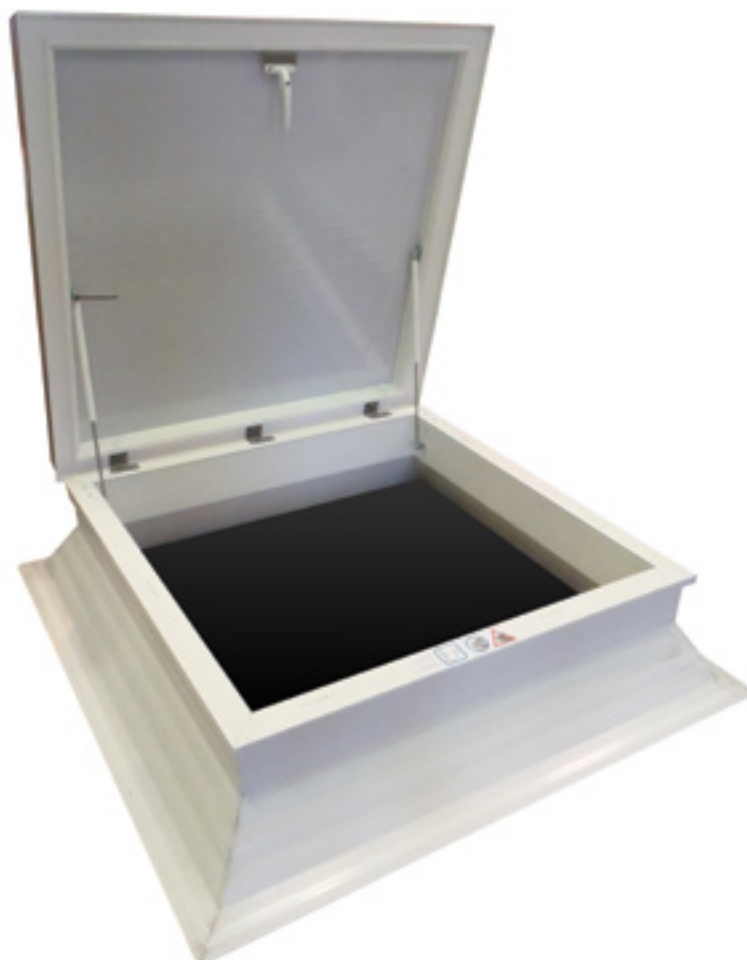

- Gas assisted struts for easy opening
- Insulated aluminium lid
- Maintenance free – will not rust
- Tamper proof frame
- Built in tapered kerb, pre-finished in white
- Needs no decorating
- 'U' Value 1.1 – ideal for buildings with low thermal requirement
- Vertical kerbs are available for a larger clear opening, if required
- Internally locking handle

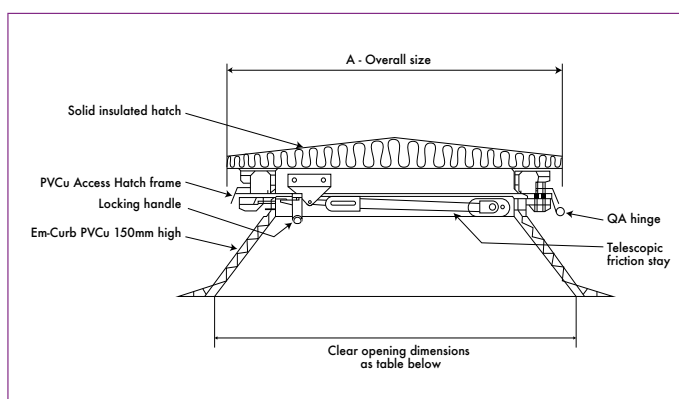

Internal clear opening dimensions

600 x 1200mm	800 x 1100mm	1000 x 1000mm
700 x 700mm	900 x 900mm	1100 x 1100mm
700 x 1000mm	900 x 1200mm	1200 x 1200mm
800 x 800mm	950 x 950mm	1400 x 1400mm

* Please note the sloping kerb reduces the upper opening dimension by 200mm


Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Flat Roof Smoke Vent

ABP-AOV

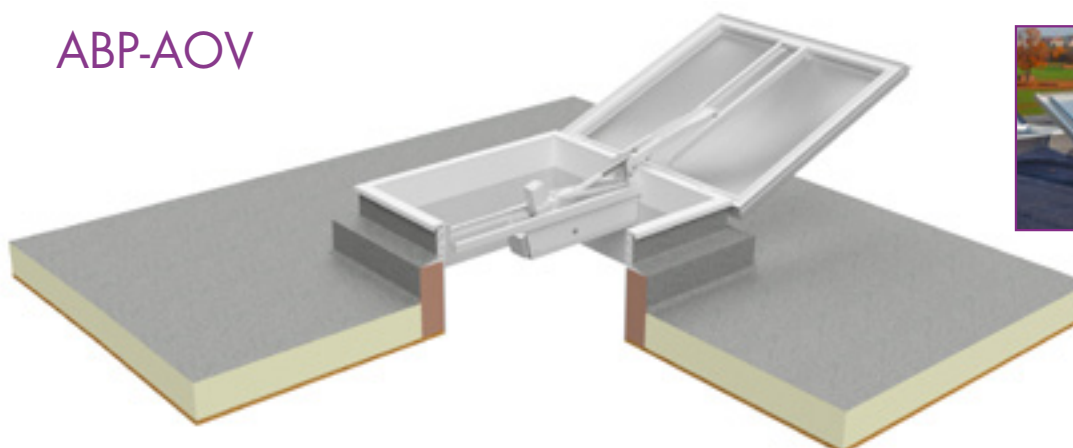

- ABP-AOV Smoke Vents are CE marked and fully certified to approved document B section 2 BS EN12101-2 and to Building Regulations ADB and ADL. These electrically operated smoke vent rooflights are designed to reduce smoke and heat build-up in buildings in the event of a fire
- Fitted with an integrated opening vent actuator, allowing key fire escape routes such as corridors and stairways to remain functional with minimal smoke build-up. Combined with a dome lid helps maximise natural light in the area
- The automatic opening vent is supplied with high security lid fixings as standard
- ABP-AOV opening vents can also be used to ventilate warm areas and provide electronically operated access
- Optional control panels, smoke detectors, fireman's switches and manual control points available
- We also offer a commissioning service to suit
- Available with either a solid cover or a double skin polycarbonate lid with an impact resistance to EN1873 1200 joules
- The lid opens to 160° within 60 seconds, thus exceeding the requirements of the new Smoke Vent Standard BS EN12101-2.

Product Code	Product Location	Size	Free Area	Kerb Height	Lid Composition
AOV-150-DS-1050x1050mm	Head of Stairs & Smoke Shafts	1050x1050mm	1.0m ²	150mm	Clear Double Skin
AOV-150-AL-1050x1050mm	Head of Stairs & Smoke Shafts	1050x1050mm	1.0m ²	150mm	Insulated Aluminium
AOV-150-DS-900x1200mm	Head of Stairs & Smoke Shafts	900x1200mm	1.0m ²	150mm	Clear Double Skin
AOV-150-AL-900x1200mm	Head of Stairs & Smoke Shafts	900x1200mm	1.0m ²	150mm	Insulated Aluminium
AOV-150-DS-1300x1300mm	Lobbies & Corridor Vents	1300x1300mm	1.5m ²	150mm	Clear Double Skin
AOV-150-AL-1300x1300mm	Lobbies & Corridor Vents	1300x1300mm	1.5m ²	150mm	Insulated Aluminium
AOV-150-DS-1000x1600mm	Lobbies & Corridor Vents	1000x1600mm	1.5m ²	150mm	Clear Double Skin
AOV-150-AL-1000x1600mm	Lobbies & Corridor Vents	1000x1600mm	1.5m ²	150mm	Insulated Aluminium



Single Zone Control Panel

Designed to control the operation of electric opening systems for fire and comfort ventilation. Visual LED indicators and open and close commands to front panel, and 72hr battery back-up. Either networked as part of a building management system (BMS) or as a complete standalone system. Certified in accordance with EN12101-10 2005 Class A (double supply).



Fireman's Priority Switch

Developed to provide the highest priority control. Visual LED status symbol and sound indicator.



Manual Control Point

Visual LED indication of status is provided and reset function. The break glass can be opened to allow the smoke vent system to be tested from any control point.



Smoke Detector

Early fire detection incorporates a visual LED display when activated.

See Page 27 for ladder access

Jupiter Blue, Unit 86, Marston Moor Business Park, Tockwith YO26 7QF

T: 01937 325 325 E: info@jupiterblue.co.uk

www.jupiterblue.co.uk

Jupiter Blue Limited is a privately owned company producing and supplying Loft Access Hatches, Access Panels, Roof Hatches and associated products to the Private and Public Sectors of the building industry, through Distributors and Builders' Merchants.

For the latest information please visit:
www.jupiterblue.co.uk



Jupiter Blue Ltd

Unit 86, Marston Moor Business Park,
Tockwith YO26 7QF

T: 01937 325 325

E: info@jupiterblue.co.uk