


order.

Standard Bow Top Fencing Rail Galvanised

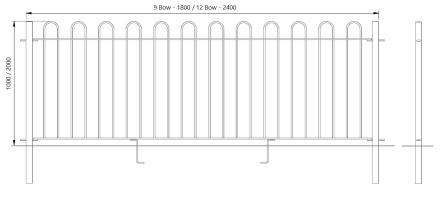

AUTOPA's Bow Top Fencing Rail is ideal for residential and commercial properties to mark and secure site perimeters. All the products in the range are manufactured by AUTOPA from mild steel which is galvanised for longevity. The fence panels are supplied galvanised as standard and can be colour coated if required. RAL numbers must be specified at time of

The infill bars and bows are manufactured from 12mm diameter mild steel and are spaced 100mm apart . Please note, this rail does not comply with BS EN 1176-1, for play safe fencing please choose our anti-trap bow top fencing.

AUTOPA's Bow Top fencing rail is available 1000mm or 1200mm above ground with a choice of panel widths. All panels and posts are supplied with the appropriate brackets and fixings for ease of install.

<u>Part Number</u>	Description	<u>Weight (kg</u>
38 174 600	9 Bow Panel, 1000mm Tall - Galvanised	24kg
38 174 610	9 Bow Panel, 1200mm Tall - Galvanised	27kg
38 174 625	12 Bow Panel, 1000mm Tall - Galvanised	32kg
38 174 620	12 Bow Panel, 1200mm Tall - Galvanised	36kg
38 501 800	Rail Post, 1000mm Tall - Galvanised	7kg
38 501 802	Rail Post, 1200mm Tall - Galvanised	8kg

Product details

- Bows 12mm diameter bar
- 9 bow panel 1800mm wide
- 12 bow panel 2400mm wide

- Available either 1000mm or 1200mm height above ground
- Available concrete in only
- Concrete in 500mm/550mm (below ground) Rail posts only

Installation & use

1000mm tall rail posts require a hole of at least 500mm for casting into concrete. 1200mm tall rail posts require a hole of at least 550mm for casting into concrete. This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP



