


Amber LowPro+ Overlay Board

The LowPro+ Overlay Board is an insulation board which helps speed up the process of wet underfloor heating.

LowPro+ underfloor heating boards are lightweight, super strong and easy to fit over any existing or new floor.

Made using building grade 400 kPa EPS and combined with thick, rapid response aluminium, they're designed to deliver optimum performance.

With no specialist tools required, the boards can simply be cut to shape using a fine-toothed saw or craft knife.

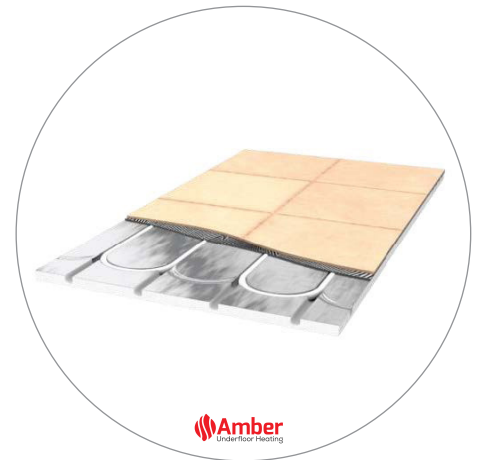

Benefits

- Suitable for tile, stone, laminate and wood
- Tile direct to board – no need for backboards or intermediate layers
- Eliminates the moisture, weight, mess and drying time of a screed underfloor system
- Easy to cut to shape with basic tools

Technical Specification	
Maximum pipe loop length	20mm board = 120m (16mm pipe), 16mm board = 80m (12mm pipe)
Pipe spacing	20mm = 150mm pipe spacings, 16mm = 120mm pipe spacing
Material	400kPa Expanded Polystyrene
Guaranteed for	Lifetime
Weight	1.0Kg
Width	600mm
Length	1200mm
Profile height	20mm (uses 16mm pipe), 16mm (uses 12mm pipe)
Type	Rapid Response (With Aluminium)

Stock Code	Product Name	Size (mm)
16mm OverFloor EPS400	LowPro+ 16mm	16mm
20mm OverFloor EPS400	LowPro+ 20mm	20mm