

CI/SfB		
	(Ff3)	

May 2016

# Forticrete masonry



## linear

Elegant, colourful and wonderfully  
long concrete bricks



# Linear

## You won't believe the lengths we go to...



The Forticrete 'Linear' range has been created to give architects the flexibility to create ever more distinctive exteriors, whilst still retaining its beauty, longevity and traditional feel.

Available in lengths up to 440mm and depths of either 65mm or 50mm, Linear allows you to accentuate the linearity of the façade to create a range of dramatic new effects that take architecture to a new level.

Many different textures and colours means no compromises when it comes to choosing exactly the appearance you want.

### Designing with Linear bricks

Linear opens up a completely new aesthetic for buildings, whilst still maintaining the durability and low maintenance attributes associated with one of our most enduring building materials.

The different dimensions can be easily accommodated with just a little extra thought, yet give you additional flexibility to create a unique canvas for your building.

### Shot-blasted



### Splitface



### Burnished Venezia™





### Sizes and formats

	Nominal thickness 100mm					
SHOT-BLASTED, FLORENTINE® AND VENEZIA®	B1	B6	B11	E1	E6	E11
	6.26kg	4.8kg	3.2kg	5.0kg	3.5kg	2.4kg
	Nominal thickness 107mm					
SPLITFACE	S1	S6	S11			
	6.9kg	4.85g	3.15kg			

### Front Cover:

Linear Shot-blasted Diamond at a private house, Reigate, Surrey.

## Corner and reveal details

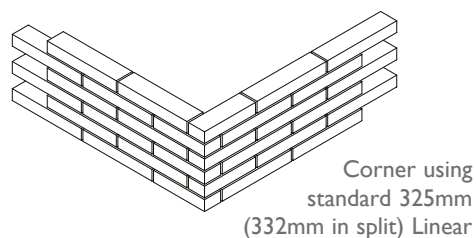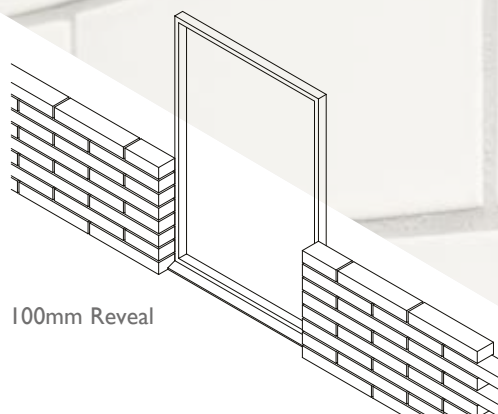

## Polished Florentine®



For sales enquiries please contact our  
Anstone office on **01909 775 000**  
Email us at **[masonry@forticrete.com](mailto:masonry@forticrete.com)**  
or visit **[www.forticrete.co.uk](http://www.forticrete.co.uk)**

## Colours and textures

	Shot-blasted	Splitface	Burnished Venezia™	Polished Florentine®
Pewter Recycled Content: 15%				
Steel Grey Recycled Content: 25%				
Flint Recycled Content: 25%				
Ivory Recycled Content: 10%				
Diamond Recycled Content: 0%				
Bathstone Recycled Content: 25%				
Yorkstone Recycled Content: 25%				
Hamstone Recycled Content: 25%				
Straw Recycled Content: 25%				
Sandstone Recycled Content: 25%				
Terracotta Recycled Content: 25%				
Damson Recycled Content: 15%				
Autumn Recycled Content: 15%				
Spruce Recycled Content: 15%				
Sports Blue® Recycled Content: 25%				
Sports Green® Recycled Content: 25%				



## Specifications

<b>Mean Compressive Strength (Air Dry)</b>	18 N/mm <sup>2</sup>
<b>Reaction to Fire</b>	Euroclass A1 based on commission decision 2000/605 EC amending 96/603 EC
<b>Gross Dry Density</b>	2100 kg/m <sup>3</sup> Tested to BS EN 772-13
<b>Thermal Conductivity</b>	1.11 W/mK ( $\lambda_{10, dry, unit}$ ) Based on BS EN 1745:2012 P=50% Group 1 Tabulated value, Model S1 Group 2 Calculated value, Model P4 BS EN ISO 6946 method
<b>Configuration</b>	Group 1 to EN 1996-1-1
<b>Manufacturing Tolerance</b>	D1 – (+2, -2 length and height, +1, -3 thickness)
<b>Water Resistance</b>	< 4 g/m <sup>2</sup> , s tested to BS EN 772-11:2011



Linear Splitface Autumn at Trinity Catholic College, Middlesbrough.



## Product samples

The colours reproduced within this brochure are as accurate as the photographic and printing processes will allow. Where colour matching is critical, you are advised to view actual product samples. Slips or full linear bricks are available as samples, please specify when requesting.

These are available by calling **01909 775000**. For larger projects, sample panels can be provided.

### Masonry Sales

Forticrete Limited,  
Anstone, Kiveton Park Station,  
Kiveton Park, Sheffield  
S26 6NP

**Tel: 01909 775000**

Fax: 01909 773549

E-mail: [masonry@forticrete.com](mailto:masonry@forticrete.com)

Information on the complete range of Forticrete products can be found at [www.forticrete.co.uk](http://www.forticrete.co.uk)

Forticrete and Florentine are registered trademarks of Forticrete Ltd.

Venezia is a trademark of Forticrete Ltd.

This document does not form part of any contract and Forticrete cannot accept liability for any errors or omissions.

In order to maintain its position as a market leader, Forticrete operates a policy of continuous product development and therefore reserves the right to alter specifications without notice.

All relevant Forticrete products are CE marked. Declarations of Performance are available at [www.forticrete-ce.com](http://www.forticrete-ce.com)

Although the instructions contained in this publication and any other information published by Forticrete are believed to be accurate at the date of publication, they are strictly for guidance only and Forticrete accepts no liability in relation to their use or for any losses, howsoever caused. You are responsible for taking all reasonable steps to ensure your use of the goods/products conforms to all applicable health and safety requirements from time to time. If in doubt, please consult appropriately qualified persons. All products sold by Forticrete are sold subject to Forticrete's Terms and Conditions of Sale, a copy of which is available on request.

[www.forticrete.co.uk](http://www.forticrete.co.uk)

© Forticrete Ltd. 2016. All rights reserved.

