



SAFETY AT THE HIGHEST LEVEL

EASI-DEC CATWALK END-SUPPORT FRAME

Assembly Instructions




Easi-Dec Access Systems Ltd.,
Merlin House,
Blaydon Road,
Sandy
SG19 1RZ
Tel: +44 (0) 1767 691812
Fax: +44 (0) 1767 691802

E-Mail: info@easi-dec.com
Internet: www.easi-dec.com


PLEASE BE ADVISED: Before assembling the Easi-Dec End Support for the first time, it is highly recommended that Installers familiarise themselves with the component parts and carry out a test assembly and disassembly in a safe area away from the point of final installation. All component parts detailed in the operating instructions must be used in the assembly of the system. Should a piece be missing or appear defective do not continue to assemble and contact Easi-Dec Immediately.

Step 1

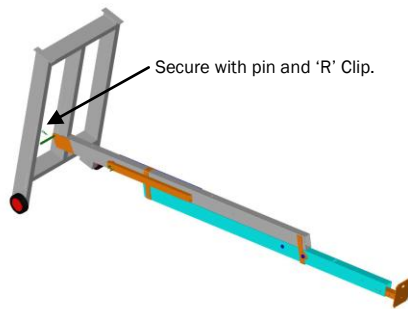

Fit a spare Easi-Dec Leg or an End support frame Leg to the End-Support frame and ensure the Pins and 'R' clips are secure.

Step 2

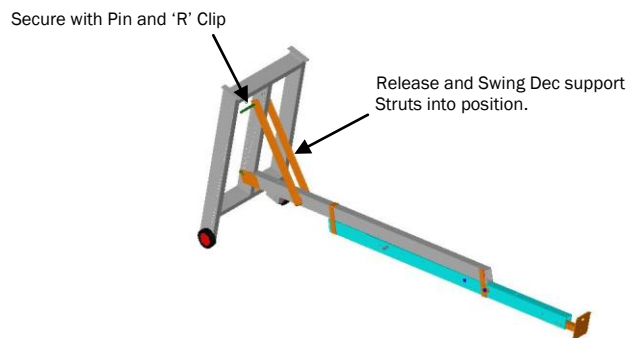

Swing the Dec support struts into position and secure with the pin and 'R' clip supplied.


Step 3



Position the Leg and frame against the wall and adjust for height and level.


Remove Pins and 'R' Clip
And adjust height and level.

Step 4

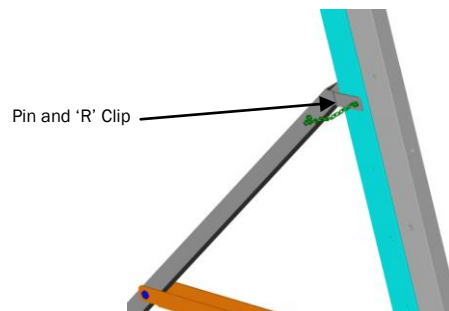


Fit the top Leg at about Eye Level and secure with pin and 'R' Clip.

Step 5

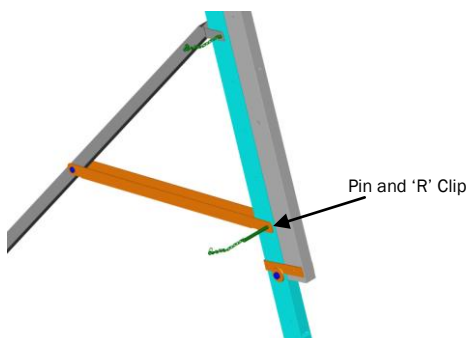


Swing the Brace into position and secure with the pins and 'R' Clips provided.

Step 6

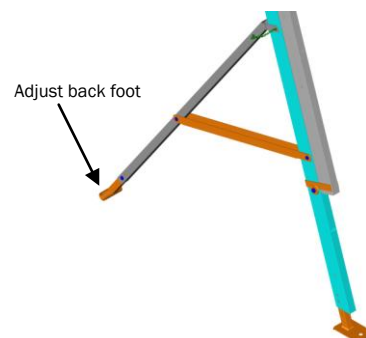

Drop the foot to the ground and take it up to the next hole secure with Pin and 'R' Clip. Ideally a fingers clearance between foot and floor to ensure End support frame remains in contact with the wall.

Step 7

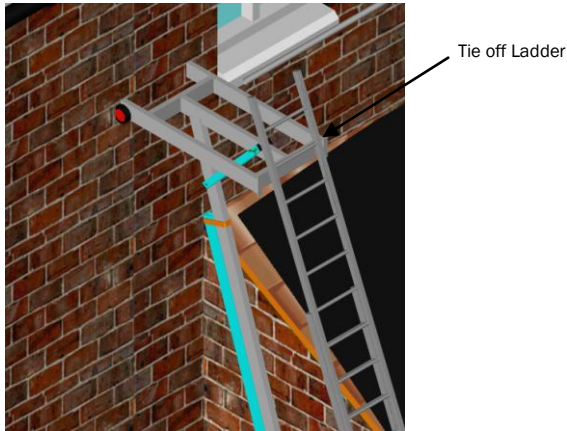

Tie off the frame securely to the building in positions indicated in step 11. Erect the Ladder against the End support frame and Tie off.

Step 8



Make sure the Easi-Dec platform and the End support frame are Level. **REMEMBER:** The Catwalk will sit a minimum of 300mm on the 2m Dec and will completely sit over the End Support frame. Set the gap between the two with this in mind.

Step 9




Raise the Cat walk as described in the 4.6m walkway assembly instructions sheet with details on how to install the Guardrail and toe boards.

Step 10



Ensure the Catwalk sits over the whole End Support Frame and Secure using the Two Ratchet straps Provided.

Step 11

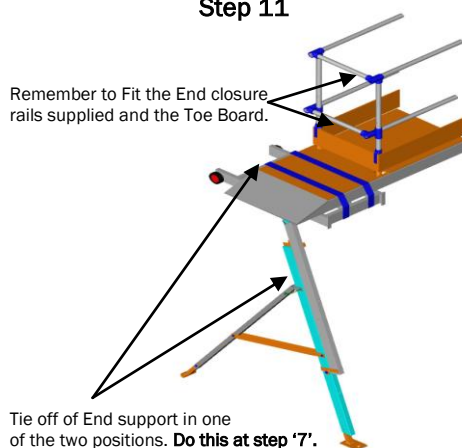

Remember to Fit the End closure rails supplied and the Toe Board.

Tie off of End support in one of the two positions. **Do this at step '7'.**

REMEMBER

- Always fit the back Leg
- Always Tie-off securely to the building.
- Always Ensure the catwalk staging sits completely over the End Support frame.
- Always strap the catwalk to the Easi-Dec first.
- Always use straps to secure the Catwalk staging to the End Support Frame
- Always close off the end using the closure rails provided.
- Never use the End Support Frame in Pairs to support a Catwalk.

Dismantle: Reverse the above procedure.