

33A/35A Series Exit Devices

[A complete range of Narrow Stile CE Marked Exit Hardware - Rim Latch Devices and Surface Vertical Rod Devices](#)

The Quiet One® -

A fluid dampener decelerates the touch bar on its return stroke and eliminates most noise associated with exit device operations. Furnished on all 33A Series Exit Devices



33A-EO Rim Latch Device




360L (06) Lever Trim

- Device Functions - Ships ready for functions; EO,DT, NL, L, L-BE, & T Universal - Non-handed, suits LH & RH doors
- Device Lengths - This device suits doors to 915mm, optional device suits doors to 1220mm
- Stock Finishes - US28 (628) Anodized Aluminium
- Dogging Feature - Hex Key Dogging keeps the latch bolt held back for free swinging operation. Options available to special order - CD Cylinder Dogging & LD Less Dogging
- Fasteners - Includes fixings for both metal and timber doors
- Latch Bolt - Easy action friction free deadlocking latches cannot be depressed from the outside - with 19mm throw

Electric Options -

LX Latchbolt Monitor Switch
RX Touch Bar Monitor Switch
RX2 Double Touch Bar Monitor Switch
ALK Alarm Exit Kit
EL Electric Latch Retraction
PN Pneumatic Latch Retraction
QEL Quiet Electric Latch Retraction

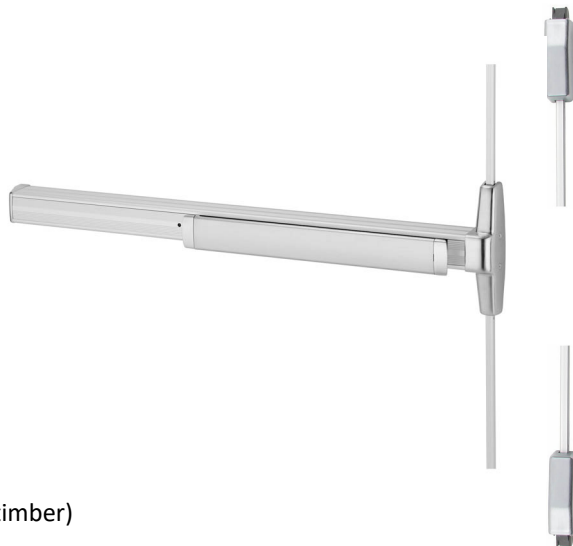

3327A-EO Surface Vertical Rod Device

UK Fire Certification in accordance with EN 1634-1:2000 (timber)
WFRC No. C132276 120mins, BS EN 1125: 2008



Von Duprin 33A/35A Series Exit Hardware

Best suited to heavy duty situations on narrow stile perimeter and internal doors where safe egress in panic emergency situations is a requirement. This range of architectural grade escape devices includes the 35A Series with its smooth mechanism case and the established 33A Series with its familiar grooved design. The two styles are mechanically and dimensionally identical and provide a solution specifically for narrow stile applications down to 44mm.