

Airbrick

Airbrick ventilator available in a range of colours

Use

- In conjunction with the 1201 / 1201XL telescopic underfloor vent for providing ventilation below suspended ground floors
- In conjunction with cavity sleeves for ventilation through external walls to a building interior

Features and Benefits

- Equivalent area of 6170mm² per air brick
- Unique stepped front grille greatly reduces the entry of wind driven rain
- 6.5mm wide front grille openings comply with BS 5440 Pt 2 and British Gas requirements
- Integral clip together facility allows multiple airbricks to be stacked to form 9" x 6" and 9" x 9" sizes
- Available in a range of colours to blend in with various brick types
- Very tough and robust
- Durable and totally resistant to decay

Quality

- Satisfies all NHBC requirements
- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Complies with all relevant Building Regulations
- Meets all relevant British Standards
- Equivalent area marking to front face of airbrick to comply with BS EN 13141-1 : 2004

Material and Colour Choice

- Manufactured by injection moulding in UV stabilised polypropylene
- Available in Buff, Terracotta, Grey, Brown, Black, White and Blue Black.

Installation Advice

- Always use in conjunction with a Timloc telescopic underfloor ventilator, or cavity sleeve, depending on the application

How to Order



- Airbrick quantity will be relative to the number of telescopic underfloor ventilators or cavity sleeves required
- State the colour required

Bill of Quantity

F30 Accessories/sundry items for brick/block/stone walling
Clause

160 | AIRBRICK

- To BS493, Class 1, built in as the work proceeds.
- Manufacturer: Timloc Building Products, Timloc House, Ozone Park, Howden, East Yorkshire, DN14 7SD. T: 01405 765567, W: www.timloc.co.uk
- Reference: 1201AB
- Design: Rectangular
- Work size: Each unit 69mm coursing x 215mm,
- (Equivalent area 6170mm²)
- Material: Thermoplastic
- Colour: (Black, White, Brown, Buff, Grey, Blue Black or Terracotta)
- Optional Accessories: e.g. 1201 Telescopic Under Floor Vent (6,500mm² with Airbrick)

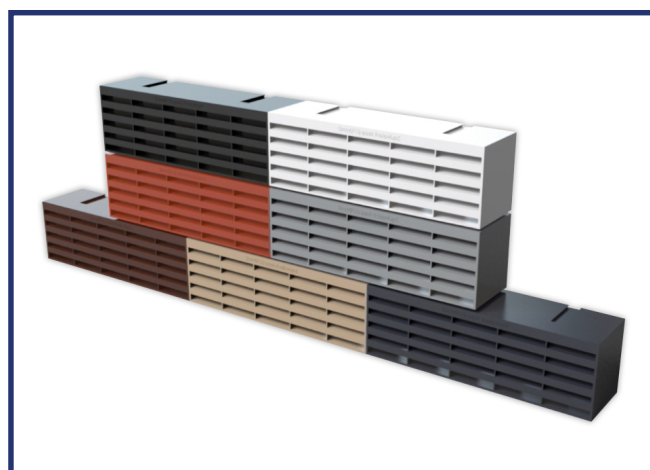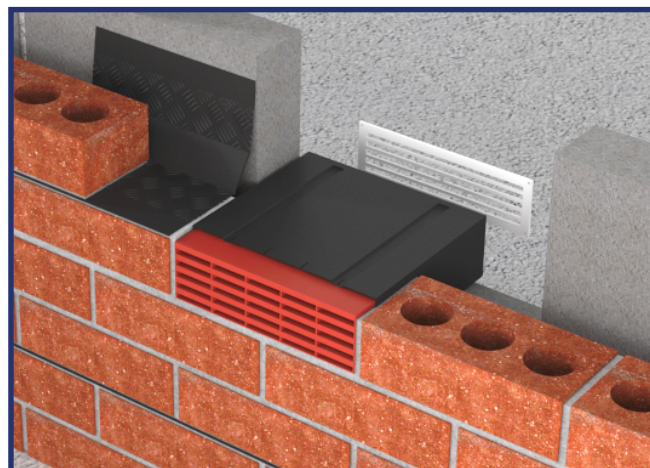

Environmental Product Declaration

A quantification of environmental information regarding the life cycle of the Airbrick. GWP total is for production stages A1-A3. Verified in accordance with ISO 14025. View the full EPD at timloc.co.uk.

Product	EPD Reference	EPD Mass (KG)	GWP A1-A3 (KG CO2e)
1201ABWH	EPD HUB, HUB-2180	0.118	1.65E-01
1201AB	EPD HUB, HUB-1836	0.1	2.50E-03

Product Codes

Description	Colour	Equivalent Area	Pack Qty	Product Code
Airbrick	Blue Black	6170mm ²	20	1201ABBB
Airbrick	Black	6170mm ²	20	1201ABBL
Airbrick	Brown	6170mm ²	20	1201ABBR
Airbrick	Buff	6170mm ²	20	1201ABBU
Airbrick	Grey	6170mm ²	20	1201ABGR
Airbrick	Terracotta	6170mm ²	20	1201ABTE
Airbrick	White	6170mm ²	20	1201ABWH

Product Dimensions

