



jaga

Eyecatchers

TOWEL RADIATORS £ 2015.UK



TOWEL RADIATORS

Warmth is comfort, affection, feeling good. Especially in your bathroom: the room where you get to escape from the world, to create a total feeling of well-being and security. Or in the kitchen, where you not only work and eat, but where you really live and enjoy the things that make you feel good, such as a dry, warm towel.

ARISTOCRAT colour stainless steel glossy 010





TOWEL RADIATORS





IGUANA ARCO



TETRA



IGUANA APLANO



IGUANA VISIO



IGUANA CIRCO / CORNER



LINEA PLUS



STRADA



TWINE


HORIZONTAL AND VERTICAL RADIATORS WITH TOWEL RAILS

As well as the towel radiators in this section, you can specify towel rails as an option on a variety of Jaga radiators. Combine functionality with beautiful designs and high heat outputs with low water temperature.



A SOFT WARMTH IN A DISTINCTIVE FORM!
 An organic gently curved design with the subtle simplicity of triangular collectors.

DIMENSIONS (in cm)

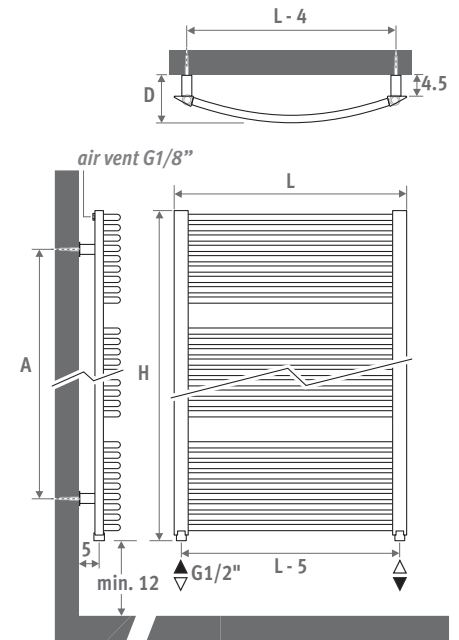

All dimensions +/- 0.2cm

L	D	H	A
050	10.3	089	67.0
065	10.6	122	101.1
080	10.7	153	131.5
095	11.0	181	137.0
		215	137.0

DELIVERY

- connection 18/81 below
- wall fixing
- chrome-plated air vent G 1/8"

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (333), smooth glossy finish
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

CONNECTION


Code:

1° number = flow

2° number = return

Standard connection:

Code 18, reversible 18 or 81



Other connections (no surcharge)

- top connection: the Accolade is symmetrical and can be mounted either way up. Insert pipe to be mounted in the return. It is delivered without surcharge if connection code 45 or 54 is specified instead of 18. An air vent has to be provided on the central heating pipework.
- single point connection: see chapter "Connection set & Valves" - set 81 or 82.
- electric heating element and mixed application: see "Parts & Options"

CONNECTION SETS

Example showing connection set to the wall Jaga Danfoss double angled

TRV head and sleeve couplings included.




set 88	To the wall	£
	CODE.DHR.CD.1...	109.90

enter sleeve coupling code

- Precision metal tube 15/1 **115**
- Precision metal tube 16/1 **116**
- Precision metal tube 18/1 **118**
- RPE/ALU tube 16/2 **316**
- RPE/ALU tube 18/2 **318**

Other connection sets and sleeve couplings

See chapter "Connection sets and valves" for all connection options and technical information.

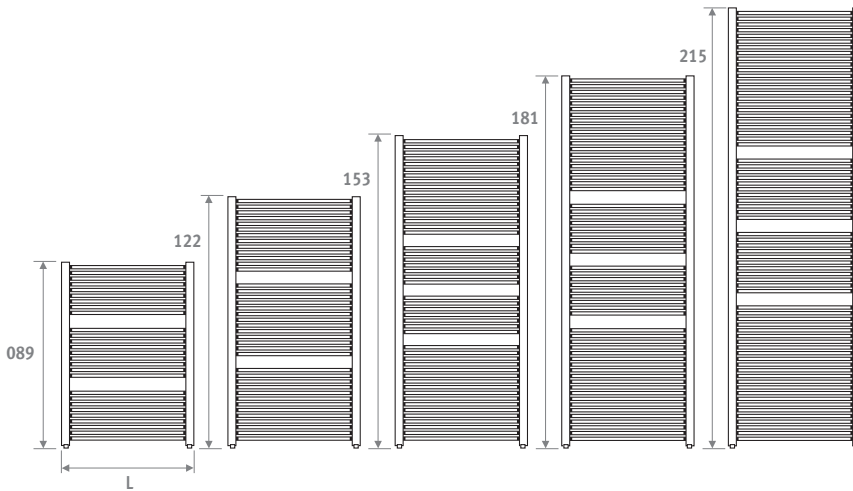

Also available without gaps for towels, see www.jaga.co.uk


ACCOLADE SANI

code height length colour conn.
ACSW . 089 050 . XXX /18
 enter colour code —


	Watts 75/65	Watts 55/45	£ st. colour	£ other
L H 089				
050	502	260	411.00	472.60
065	629	325	483.60	556.20
080	756	391	504.50	580.30
095	883	457	532.10	611.80
L H 122				
050	688	355	522.70	601.20
065	882	457	557.30	640.80
080	1075	559	592.10	681.10
095	1269	661	626.30	720.10
L H 153				
050	827	425	585.80	673.60
065	1065	552	624.40	718.20
080	1303	680	663.70	763.20
095	1542	808	701.70	807.00
L H 181				
050	982	503	643.90	740.50
065	1263	656	688.40	791.70
080	1545	809	737.60	848.10
095	1826	962	786.30	904.10
L H 215				
050	1171	598	747.00	859.20
065	1494	777	812.90	934.80
080	1818	957	878.50	1010.20
095	2141	1136	944.60	1086.10

EN442 output at 20°C room temperature



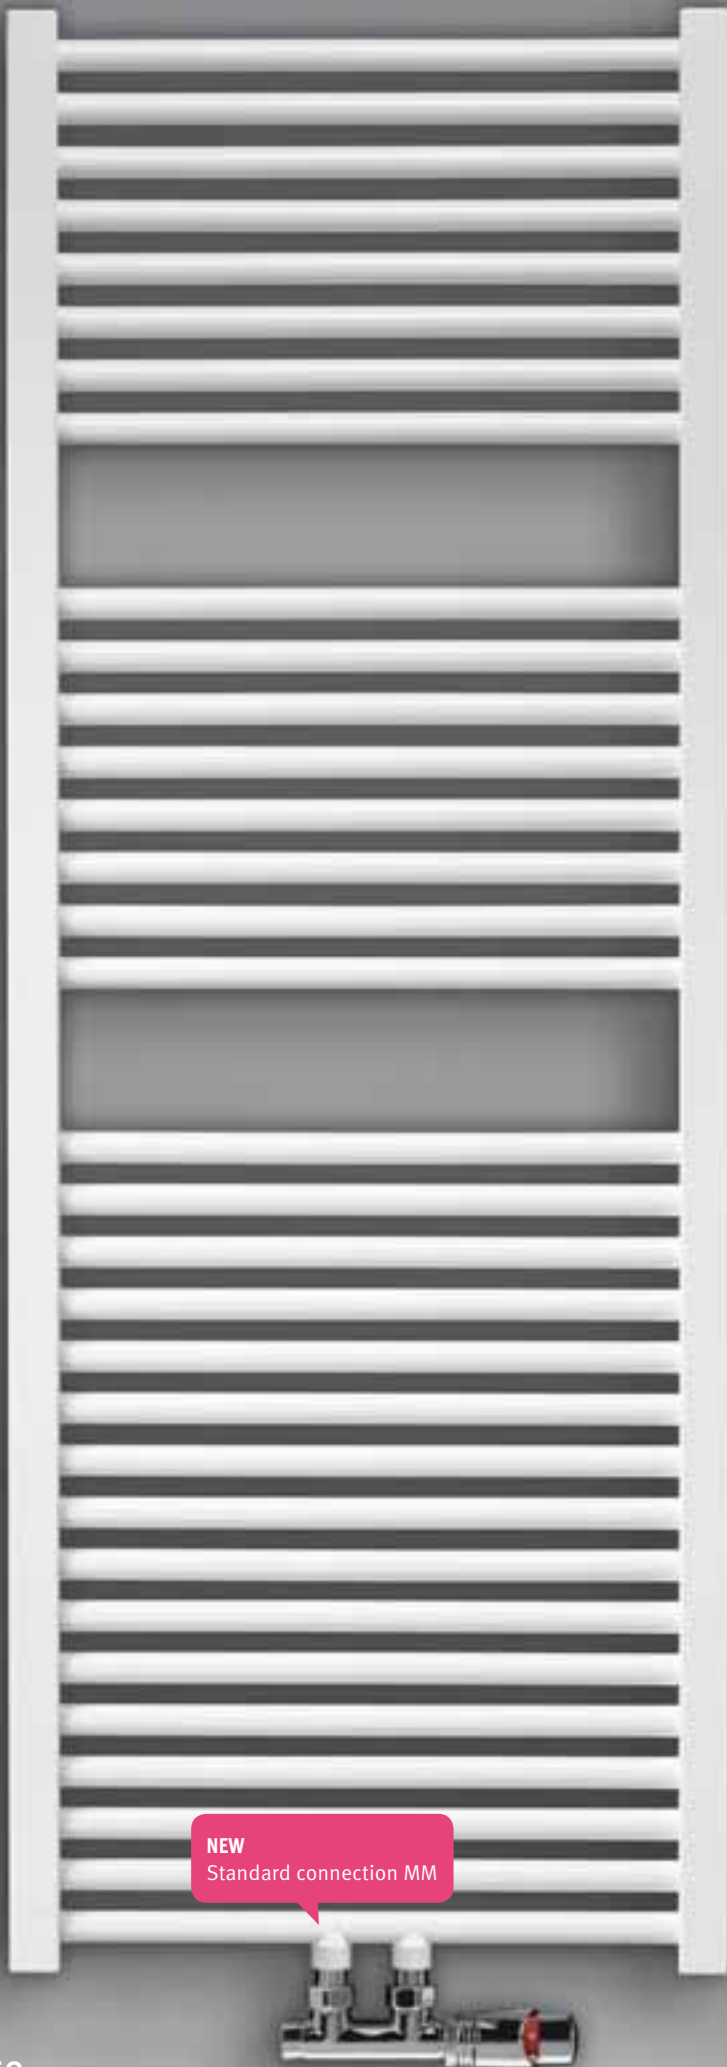

DIMENSIONS (in cm)

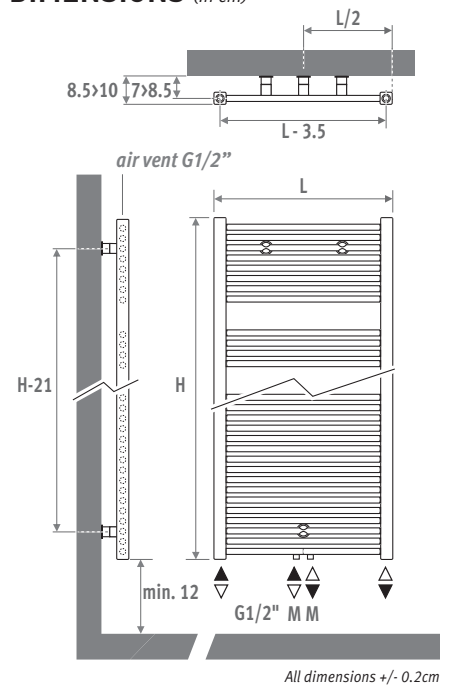

DELIVERY

- central connection MM underneath
- wall fixing
- chrome-plated air vent and 3 drain plugs G1/2"

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (233), smooth glossy finish
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

Also available in chrome version.

CONNECTION


Code:

1° number = flow

2° number = return

Standard connection:

- central connection MM below or on top, flow left or right. Connection 18 or 81 is also possible



Other connections:

When assigning a different connection code MM will be removed (no surcharge - extended delivery time).

- top connection: enter code 45 or 54. Insert pipe included. Has to be mounted in the return. Always mount an air vent on the central heating pipework.
- side connection: enter code 41 or 58
- single point connection: see chapter "Connection set & Valves" - set 81 or 82. Not possible with a radiator on feet.
- electric heating element and mixed application: see "Parts & Options"

CONNECTION SETS

Example showing connection set to the wall with a Deco-Pro valve

TRV head and sleeve couplings included.



set 48

BRUSHED STAINLESS STEEL £

CODE.PW3.PS.1... 258.90

set 41

CHROME £

CODE.PW3.DW.1... 162.70

CODE.PW3.DC.1... 174.10

enter sleeve coupling code

Precision metal tube 15/1 115
Precision metal tube 16/1 116
Precision metal tube 18/1 118
RPE/ALU tube 16/2 316
RPE/ALU tube 18/2 318

Other connection sets and sleeve couplings

See chapter "Connection sets and valves" for all connection options and technical information.

The classic towel-rail. A combination of simple timeless design and high heat output!

SURCHARGE FREESTANDING MODEL


Not possible with electric version.

Height 175 and 205 cm.

Delivery:

- 2 feet
- 2 ceiling fixings
- 1 chrome-plated T-piece G1/2"
- 1 chrome-plated air vent G1/2"
- connection MM

Recommended connection set: set 42

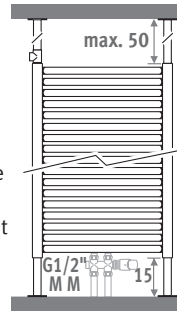

CODE	£	£	£
	st. colour	other	chrome
SROF.HHHLLL.XXX/MM	99.90	110.00	170.50

ELECTRIC VERSION

Not possible with chrome-plated version.

Completely pre-assembled and filled radiator.

With electric element Eco-Comfort

H	L	Watts	£	£
			st. colour	other
93	050	600	627.85	690.35
122	050	750	669.95	740.55
137	060	1000	727.05	806.35
175	060	1250	800.85	894.85
205	060	1500	879.15	988.15

Add to the ordering code of the radiator /EL

Ex.: SROW.122050.XXX/EL

With electric element and infra-red remote control

H	L	Watts	£	£
			st. colour	other
93	050	600	879.25	941.75
137	050	900	935.15	1011.05

Add to the ordering code of the radiator /IR

Ex.: SROW.122050.XXX/IR

Other models and technical info see "Parts & Options".

SANI RONDA

code height length colour conn.
SROW . 063 040 . XXX /MM
enter colour code

	Watts	Watts	£	£	£
	75/65	55/45	st. colour	other	chrome
L H 063					
040	268	141	293.70	337.70	---
050	322	169	325.10	343.30	---
060	376	196	310.20	356.60	---
070	429	223	326.70	375.80	---
080	483	251	339.00	390.00	---
100	590	305	363.70	418.20	---

L H 093					
040	407	213	335.90	386.20	---
050	494	257	343.50	395.20	915.60
060	581	302	367.10	422.20	---
070	668	346	371.40	427.10	---
080	755	390	385.40	443.20	---
100	929	479	413.30	475.30	---

L H 122					
040	546	283	378.30	435.10	---
050	665	344	388.50	446.80	1036.00
060	784	405	405.70	466.50	1080.50
070	903	466	422.70	486.10	---
080	1023	527	440.00	505.90	---
100	1261	649	473.70	544.70	---


L H 137					
040	617	318	406.00	466.80	---
050	752	388	417.70	480.40	1113.90
060	887	457	436.30	501.60	1163.60
070	1022	526	454.60	522.70	---
080	1157	595	472.90	544.00	---
100	1427	733	509.40	585.80	---

L H 175					
040	766	392	479.50	551.50	---
050	931	477	495.20	569.70	1319.70
060	1097	562	517.10	594.60	1376.70
070	1262	647	542.00	623.30	---
080	1428	732	567.10	652.10	---
100	1759	902	617.20	709.70	---

L H 205					
040	923	469	546.80	628.80	---
050	1118	569	566.10	651.00	---
060	1314	670	599.30	689.30	---
070	1509	770	632.40	727.20	---
080	1705	871	665.70	765.60	---
100	2096	1072	732.30	842.20	---


Output chrome-plated = -35%

EN442 output at 20°C room temperature

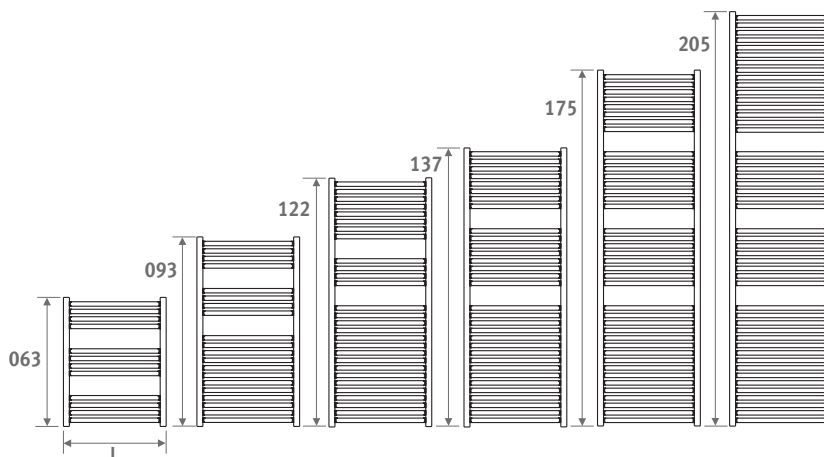

EN 442

DIMENSIONS (in cm)

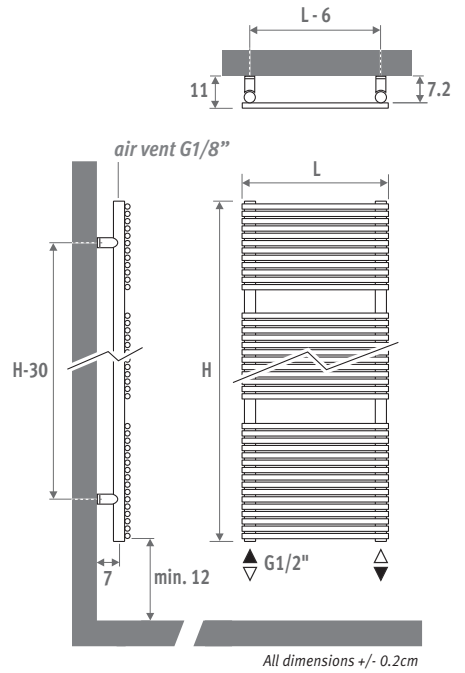

All dimensions +/- 0.2cm

DELIVERY

- connection 18/81 below
- wall fixing
- chrome-plated air vent and drain plug G1/2\"

COLOURS

Aristocrat

- gloss polished stainless steel (010)
- stainless steel matt (011)

Nautica

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (233), smooth glossy finish
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

CONNECTION


Code:

1° number = flow

2° number = return

Standard connection:

Code 18, reversible 18 or 81



Other connections (no surcharge):

- single point connection: see chapter "Connection set & Valves" - set 81 or 82.
- electric heating element and mixed application: see "Parts & Options"

CONNECTION SETS

Example showing connection set to the wall

Jaga Deco Double angled

TRV head and sleeve couplings included.



set 35	CHROME	£
	CODE.JH2.DW.1...	205.40
	CODE.JH2.DC.1...	216.80
enter sleeve coupling code		
	Precision metal tube 15/1	115
	Precision metal tube 16/1	116
	Precision metal tube 18/1	118
	RPE/ALU tube 16/2	316
	RPE/ALU tube 18/2	318

Other connection sets and sleeve couplings

See chapter "Connection sets and valves" for all connection options and technical information.

NAUTICA

LACQUERED

code	height	length	colour conn.	
NAUW.	068	050.	XXX	/18
enter colour code <input type="text"/>				
	Watts 75/65	Watts 55/45	£ st. colour	£ other
L H 068				
050	404	217	370.40	426.00
060	---	---	---	---
080	---	---	---	---
L H 116				
050	723	382	421.70	484.90
060	843	444	438.70	504.40
080	---	---	---	---
L H 141				
050	850	447	529.10	608.50
060	991	523	557.70	641.30
080	---	---	---	---
L H 188				
050	1104	576	664.10	763.70
060	1315	693	691.20	795.00
080	---	---	---	---
L H 211				
050	---	---	---	---
060	1468	774	724.00	832.70
080	1887	994	775.20	891.60

ARISTOCRAT

POLISHED STAINLESS STEEL GLOSSY

code	colour	conn.	
ARIW...	010	/18	
enter colour code <input type="text"/>			
	Watts 75/65	Watts 55/45	£
H 068			
	267	144	747.70
	---	---	---
	---	---	---
H 116			
	490	256	904.20
	---	---	---
	---	---	---
H 141			
	---	---	---
	702	361	1118.30
	---	---	---
H 188			
	---	---	---
	927	486	1529.10
	---	---	---
H 211			
	---	---	---
	1029	537	1563.30
	1371	724	1628.70

BRUSHED STAINLESS STEEL MATT

code	colour	conn.	
ARIW...	011	/18	
enter colour code <input type="text"/>			
	Watts 75/65	Watts 55/45	£
H 068			
	318	168	747.70
	---	---	---
	---	---	---
H 116			
	553	289	904.20
	---	---	---
	---	---	---
H 141			
	---	---	---
	734	377	1118.30
	---	---	---
H 188			
	---	---	---
	1009	532	1529.10
	---	---	---
H 211			
	---	---	---
	1094	580	1563.30
	1500	782	1628.70


EN442 output at 20°C room temperature



ARISTOCRAT BRUSHED STAINLESS STEEL MATT




NAUTICA LACQUERED

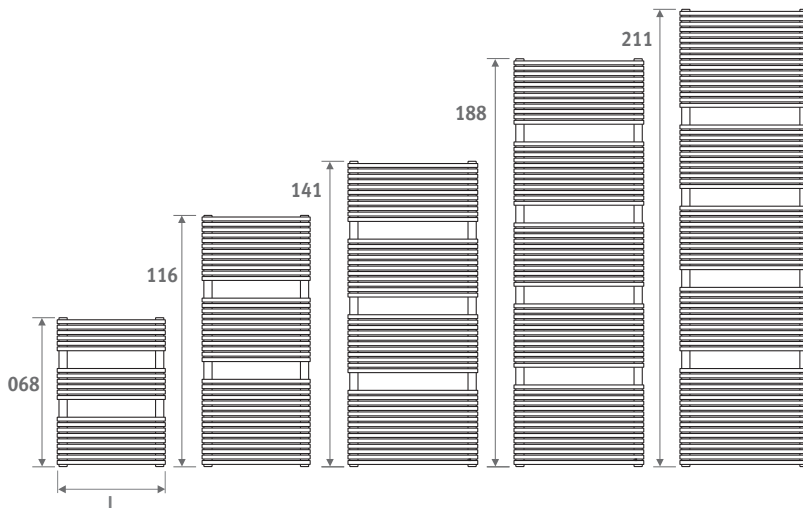

EN 442



DIMENSIONS (in cm)

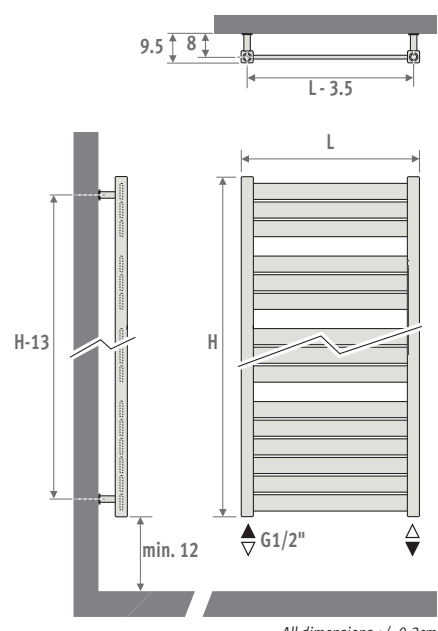

All dimensions +/- 0.2cm

DELIVERY

- connection 18/81 below
- wall fixing
- chrome-plated air vent and drain plug G1/2"

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (233), smooth glossy finish
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

CONNECTION


Code:

1° number = flow

2° number = return

Standard connection:

Code 18, reversible 18 or 81



Other connections (no surcharge):

- top connection:
 - enter code 45 or 54. Insert pipe included. Has to be mounted in the return.
 - Always mount an air vent on the central heating pipework.
- side connection:
 - enter code 41 or 58.
- single point connection: see chapter "Connection set & Valves" - set 81 or 82.
 - Not possible with a radiator on feet.
- electric heating element and mixed application: see "Parts & Options"

CONNECTION SETS

Example showing connection set to the wall Jaga Deco Double angled


TRV head and sleeve couplings included.



set 35		CHROME	£
	CODE.JH2.DW.1...		205.40
	CODE.JH2.DC.1...		216.80
enter sleeve coupling code			
	Precision metal tube 15/1		115
	Precision metal tube 16/1		116
	Precision metal tube 18/1		118
	RPE/ALU tube 16/2		316
	RPE/ALU tube 18/2		318

Other connection sets and sleeve couplings

See chapter "Connection sets and valves" for all connection options and technical information.

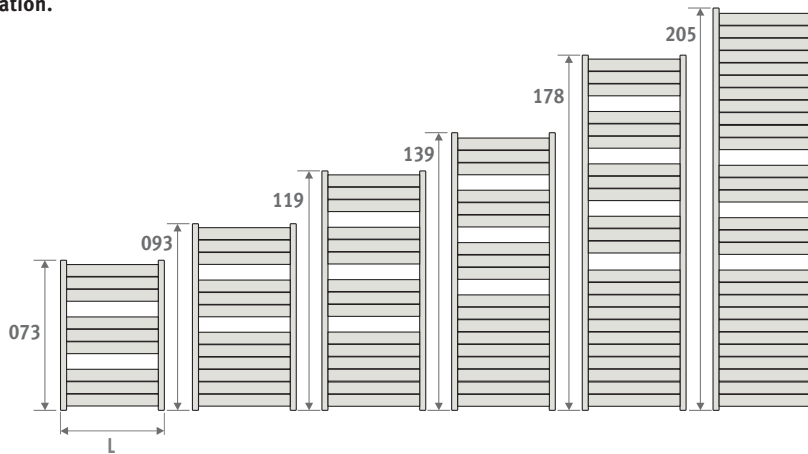

SANI PANEL


code height length colour conn.
SPAW . 073 040 . XXX /18
 enter colour code —

	Watts 75/65	Watts 55/45	£ st. colour	£ other
L H 073				
040	318	164	334.40	384.70
050	386	198	341.70	392.90
060	455	233	365.20	420.00
070	524	268	368.10	423.30
080	593	302	382.00	439.20
100	731	372	409.80	471.10
L H 093				
040	414	214	371.40	427.10
050	503	259	400.60	460.80
060	593	304	428.20	492.40
070	683	350	433.00	498.00
080	772	395	449.20	516.70
100	951	485	482.20	554.50
L H 119				
040	506	262	404.90	465.60
050	615	318	438.40	504.20
060	724	373	457.70	526.50
070	833	428	477.00	548.60
080	942	484	496.40	571.00
100	1160	594	534.60	614.80
L H 139				
040	594	309	448.70	515.90
050	721	373	487.10	560.10
060	848	438	508.50	584.80
070	975	503	530.00	609.60
080	1102	568	551.50	634.40
100	1356	697	593.90	682.90
L H 178				
040	732	382	529.90	609.40
050	887	462	577.40	664.10
060	1041	541	602.80	693.20
070	1196	620	632.00	726.80
080	1351	700	661.30	760.30
100	1660	858	719.60	827.40
L H 205				
040	860	451	604.10	694.80
050	1039	543	660.10	759.00
060	1218	636	698.80	803.70
070	1397	729	737.60	848.10
080	1576	821	776.30	892.80
100	1934	1006	853.90	982.00

EN442 output at 20°C room temperature



DIMENSIONS (in cm)

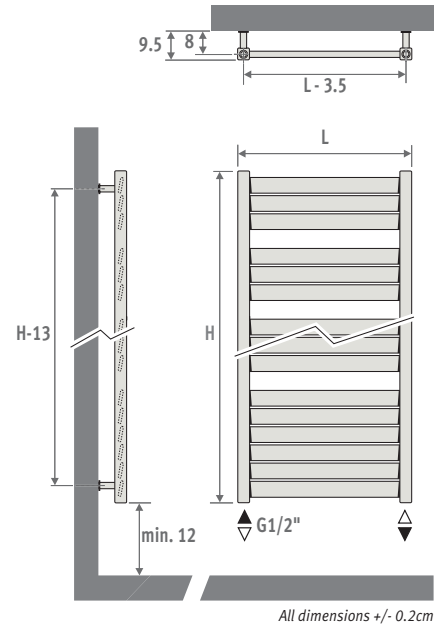

DELIVERY

- connection 18/81 below
- wall fixing
- chrome-plated air vent and drain plug G1/2"

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (233), smooth glossy finish
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

CONNECTION


Code:

1° number = flow

2° number = return

Standard connection:

Code 18, reversible 18 or 81



Other connections (no surcharge):

- top connection:
 - enter code 45 or 54. Insert pipe included. Has to be mounted in the return.
 - Always mount an air vent on the central heating pipework.
- side connection:
 - enter code 41 or 58.
- single point connection: see chapter "Connection set & Valves" - set 81 or 82.
 - Not possible with a radiator on feet.
- electric heating element and mixed application: see "Parts & Options"

CONNECTION SETS

Example showing connection set to the wall Jaga Deco double angled

TRV head and sleeve couplings included.




set 35	CHROME	£
	CODE.JH2.DW.1...	205.40
	CODE.JH2.DC.1...	216.80

enter sleeve coupling code

Precision metal tube 15/1	115
Precision metal tube 16/1	116
Precision metal tube 18/1	118
RPE/ALU tube 16/2	316
RPE/ALU tube 18/2	318

Other connection sets and sleeve couplings

See chapter "Connection sets and valves" for all connection options and technical information.

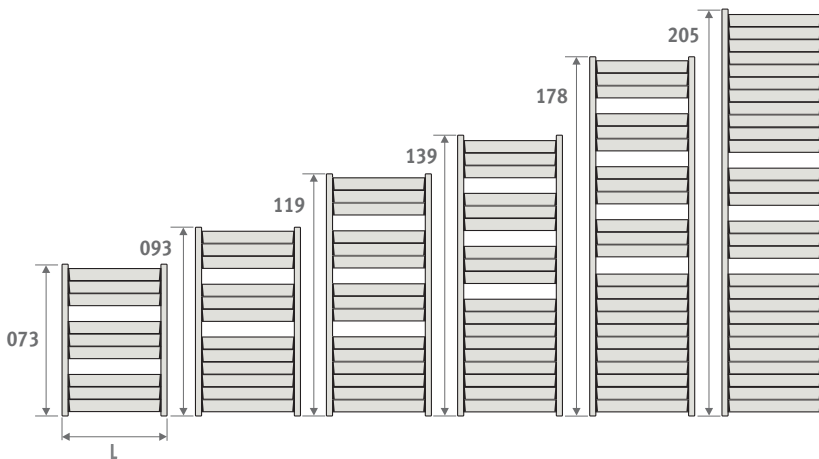

SANI LOUVRE

code height length colour conn.
SLOW . 073 040 . XXX /18
 enter colour code —

	Watts 75/65	Watts 55/45	£ st. colour	£ other
--	----------------	----------------	-----------------	------------

L	H 073			
040	352	182	334.40	384.70
050	419	215	341.70	392.90
060	487	249	365.20	420.00
070	554	282	368.10	423.30
080	621	316	382.00	439.20
100	756	383	409.80	471.10

L	H 093			
040	469	243	371.40	427.10
050	559	288	400.60	460.80
060	649	333	428.20	492.40
070	739	378	433.00	498.00
080	829	423	449.20	516.70
100	1009	513	482.20	554.50

L	H 119			
040	585	304	404.90	465.60
050	696	359	438.40	504.20
060	808	415	457.70	526.50
070	920	471	477.00	548.60
080	1032	527	496.40	571.00
100	1255	639	534.60	614.80

L	H 139			
040	697	362	448.70	515.90
050	830	429	487.10	560.10
060	963	496	508.50	584.80
070	1096	563	530.00	609.60
080	1229	630	551.50	634.40
100	1494	763	593.90	682.90

L	H 178			
040	879	459	529.90	609.40
050	1045	543	577.40	664.10
060	1211	627	602.80	693.20
070	1377	711	632.00	726.80
080	1543	795	661.30	760.30
100	1876	963	719.60	827.40


L	H 205			
040	1053	552	604.10	694.80
050	1250	652	660.10	759.00
060	1447	752	698.80	803.70
070	1644	852	737.60	848.10
080	1841	953	776.30	892.80
100	2234	1152	853.90	982.00

EN442 output at 20°C room temperature



DIMENSIONS (in cm)

BASIC

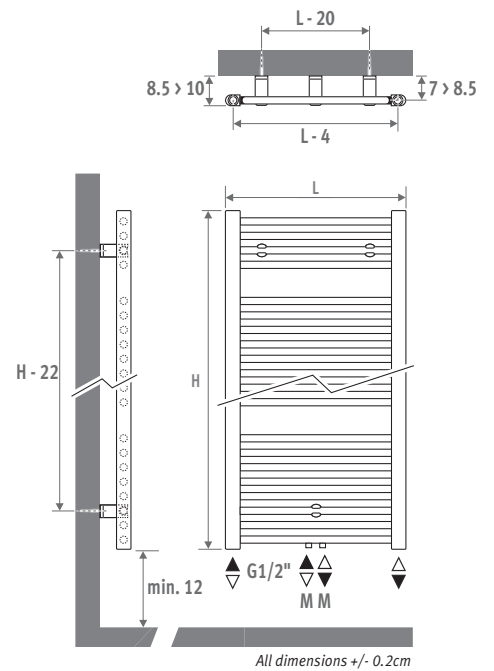

DELIVERY

- central connection MM underneath and 18/81 below
- wall fixing
- chrome-plated air vent and 3 drain plugs G1/2"

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Sani Basic

Standard colours:

- traffic white RAL 9016 (233), smooth glossy finish
- sandblast grey (001), fine texture metallic

Other colours: see colour chart.

Sani Bow

Only available in traffic white RAL 9016 (233), smooth glossy finish.

CONNECTION

Code:

1° number = flow

2° number = return

Standard connection:


- central connection MM below or on top, flow left or right. Connection 18 or 81 is also possible.

- single point connection: see chapter "Connection set & Valves" - set 81 or 82.

Other connections (no surcharge):

When assigning a different connection code MM will still continue to exist.



- top connection: enter code 45 or 54. Insert pipe included. Has to be mounted in the return. Always mount an air vent on the central heating pipework.
- electric heating element and mixed application: see "Parts & Options"



SANI BASIC & SANI BOW



BOW

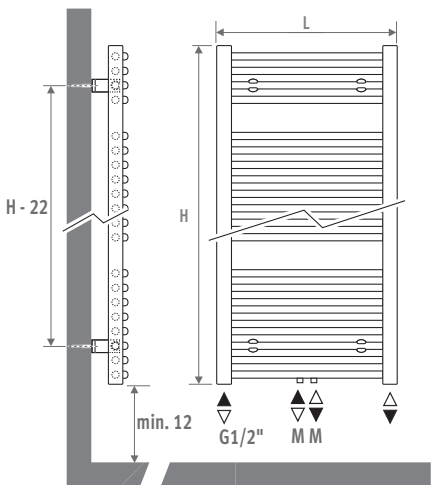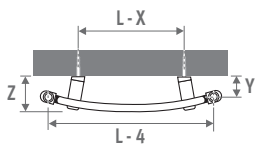

L	X	Y	Z
050	25.0	5.2 > 6.4	8.6 > 9.6
060	22.0	5.4 > 6.4	9.3 > 10.3
075	18.5	9.3 > 10.3	10.5 > 11.5

CONNECTION SETS

Example showing connection set to the wall with a Deco-Pro valve

TRV head and sleeve couplings included.



set 48

BRUSHED STAINLESS STEEL £



CODE.PW3.PS.1... **258.90**

set 41

CHROME £



CODE.PW3.DW.1... **162.70**



CODE.PW3.DC.1... **174.10**

enter sleeve coupling code

- Precision metal tube 15/1 **115**
- Precision metal tube 16/1 **116**
- Precision metal tube 18/1 **118**
- RPE/ALU tube 16/2 **316**
- RPE/ALU tube 18/2 **318**

Other connection sets and sleeve couplings

See chapter "Connection sets and valves" for all connection options and technical information.

BASIC

code height length colour conn.
SBAW . 094 050 . XXX /MM
 enter colour code

	Watts 75/65	Watts 55/45	£ st. colour	£ other
L H 094				
050	427	224	226.30	260.20
060	505	265	238.30	274.00
075	620	326	247.30	284.40
L H 132				
050	605	317	277.10	318.70
060	706	370	291.40	335.10
075	865	455	308.80	355.20
L H 170				
050	775	405	328.20	377.40
060	906	476	344.70	396.40
075	1107	583	370.20	425.70
L H 198				
050	---	---	---	---
060	1081	567	386.90	444.80
075	1317	694	419.00	481.80

BOW

code height length colour conn.
SBOW . 094 050 . 233 /MM

	Watts 75/65	Watts 55/45	£
L H 094			
050	444	237	241.90
060	528	283	255.00
075	656	351	264.70
L H 132			
050	618	329	296.60
060	732	391	312.10
075	911	488	330.40
L H 170			
050	788	419	351.00
060	938	500	368.80
075	1159	622	396.10
L H 198			
050	---	---	---
060	1122	597	414.00
075	1373	738	448.40


EN442 output at 20°C room temperature




SANI BASIC



SANI BOW

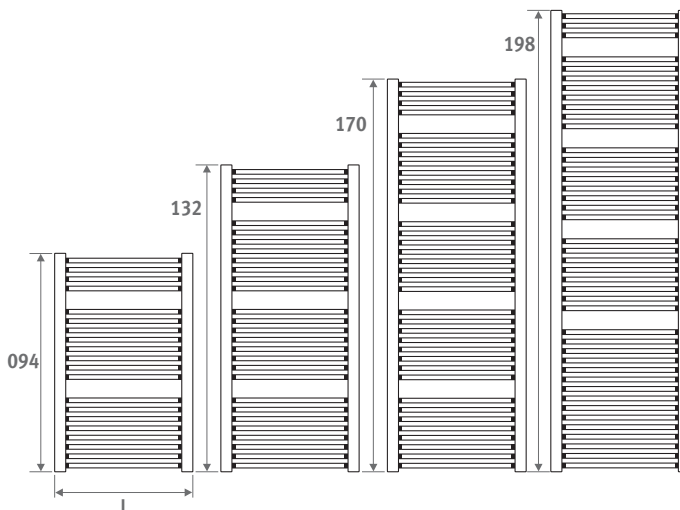

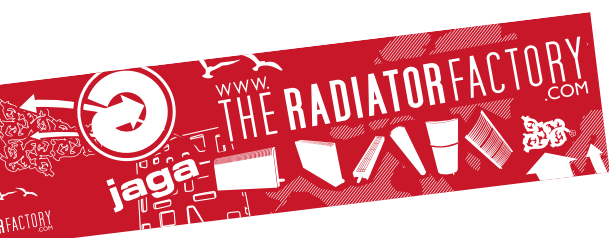

Jaga Heating Products (UK) Ltd
Orchard Business Park
Bromyard Road
Ledbury, Herefordshire HR8 1LG

Tel.: +44 1531 631 533
Fax: +44 1531 631 534
E-mail: jaga@jaga.co.uk
www.jaga.co.uk

Jaga International
Verbindingslaan z/n
B-3590 Diepenbeek

Tel.: +32 (0)11 29 41 16
Fax: +32 (0)11 29 41 60
export@jaga.be

The information in this price list is correct at the time of printing.
Jaga reserves the right to change product specification at any time in line
with our policy of continuous improvement and innovation.
All prices in Euro, exclude VAT. Prices valid from 1st February 2014.
Replaces all existing price lists.